

Canon *Canonet* Service Manual



Includes:

Canonet 1, 2, 3 (1962)
New Canonet 28 (1972)
Canonet QL 17, 19, 25 (1971)
Canonet G-III 17, 19, (1972)

CANON REPAIR MANUAL

CANONET

(REFERENCE NO. C-30208)


CANON CAMERA COMPANY, INC.

TOKYO, JAPAN

TABLE OF CONTENTS

TOP COVER.....	1,7
SHUTTER BUTTON	1
BASE PLATE	1
TRIGGER LEVER.....	1
REWIND CRANK	1
REWIND CLUTCH LEVER	1
SOME BASIC PARTS	1,2
FILM COUNTER	2,7
RANGE-VIEWFINDER OPTICAL SYSTEM	2,3
EXPOSURE METER	2,6,8
BACK COVER	4
TAKE-UP SPOOL & SPROCKET	4
BODY CASE.....	4
WINDING MECHANISM	4,5
OBJECTIVE LENS	6

EXPLODED VIEW of CANONET

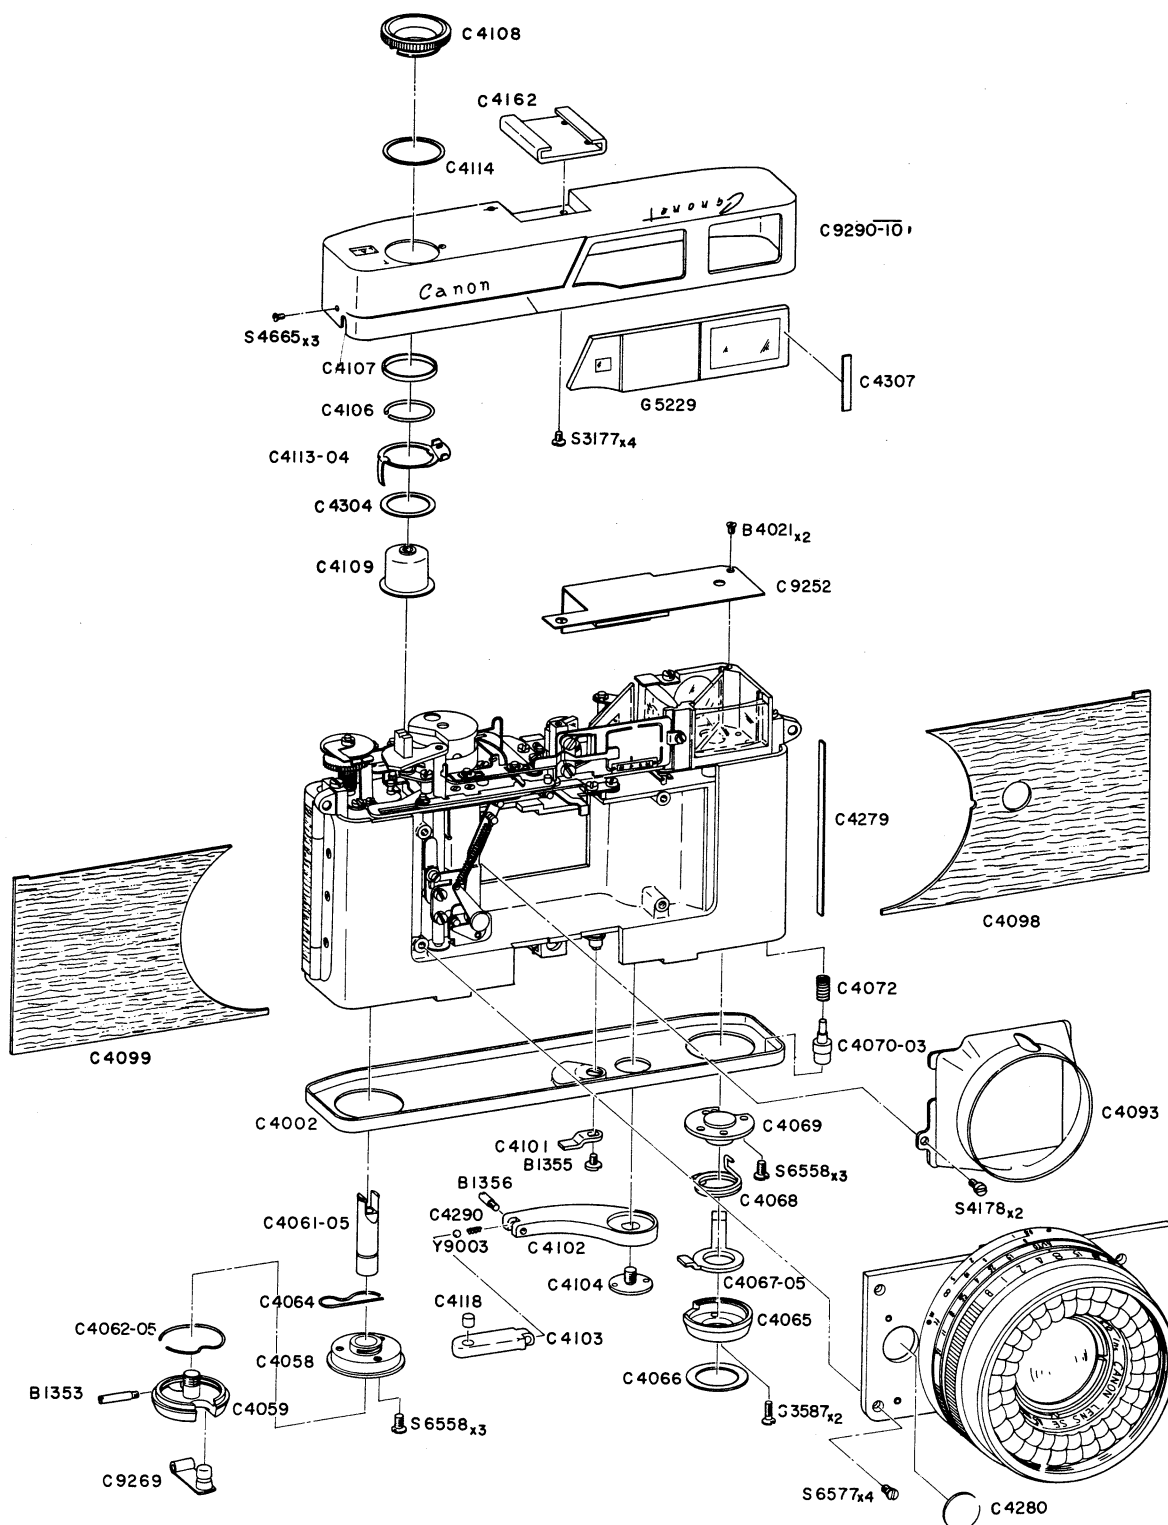

PARTS LIST

TOP COVER (cf. p. 7)

C 9290-10	Top Cover (B. P.)
C 4162	Accessory Shoe
C 4307	Liner
G 5229	Front Glass
S 3177	Screw×4
S 4665	Screw×3

SHUTTER BUTTON

C 4106	Retainer
C 4107	Ring
C 4108	Time Ring
C 4109	Shutter Button
C 4113-04	Stopper
C 4114	Washer
C 4304	Light Shield

BASE PLATE

C 4002	Base Plate
C 4065	Cover
C 4066	Leather Cover
C 4067-05	Lever
C 4068	Spring
C 4069	Tripod Socket
C 4070-03	Safety Lock
C 4072	Spring
S 3587	Screw×2
S 6558	Screw×3

TRIGGER LEVER

C 4102	Trigger Lever
C 4103	Trigger Knob
C 4104	Pin Face Screw
C 4118	Cushion
C 4290	Coil Spring
B 1356	Screw
Y 9003	Steel Ball

REWIND CRANK

C 9269	Rewind Crank (B. P.)
C 4058	Bearing
C 4059	Rewind Knuckle
C 4061-05	Rewind Fork
C 4062-05	Spring
C 4064	Spring
B 1353	Screw
S 6558	Screw×3


REWIND CLUTCH LEVER

C 4101	Film Rewind Clutch Lever
B 1355	Screw

SOME BASIC PARTS

C 9252	Cover Plate (B. P.)
C 4093	Light Shield
C 4098	Leather Cover (Front-Left)
C 4099	Leather Cover (Front-Right)
C 4279	Light Shield
C 4280	Cap
B 4021	Screw×2
S 4178	Screw×2
S 6577	Screw×4

EXPLODED VIEW
of
CANONET

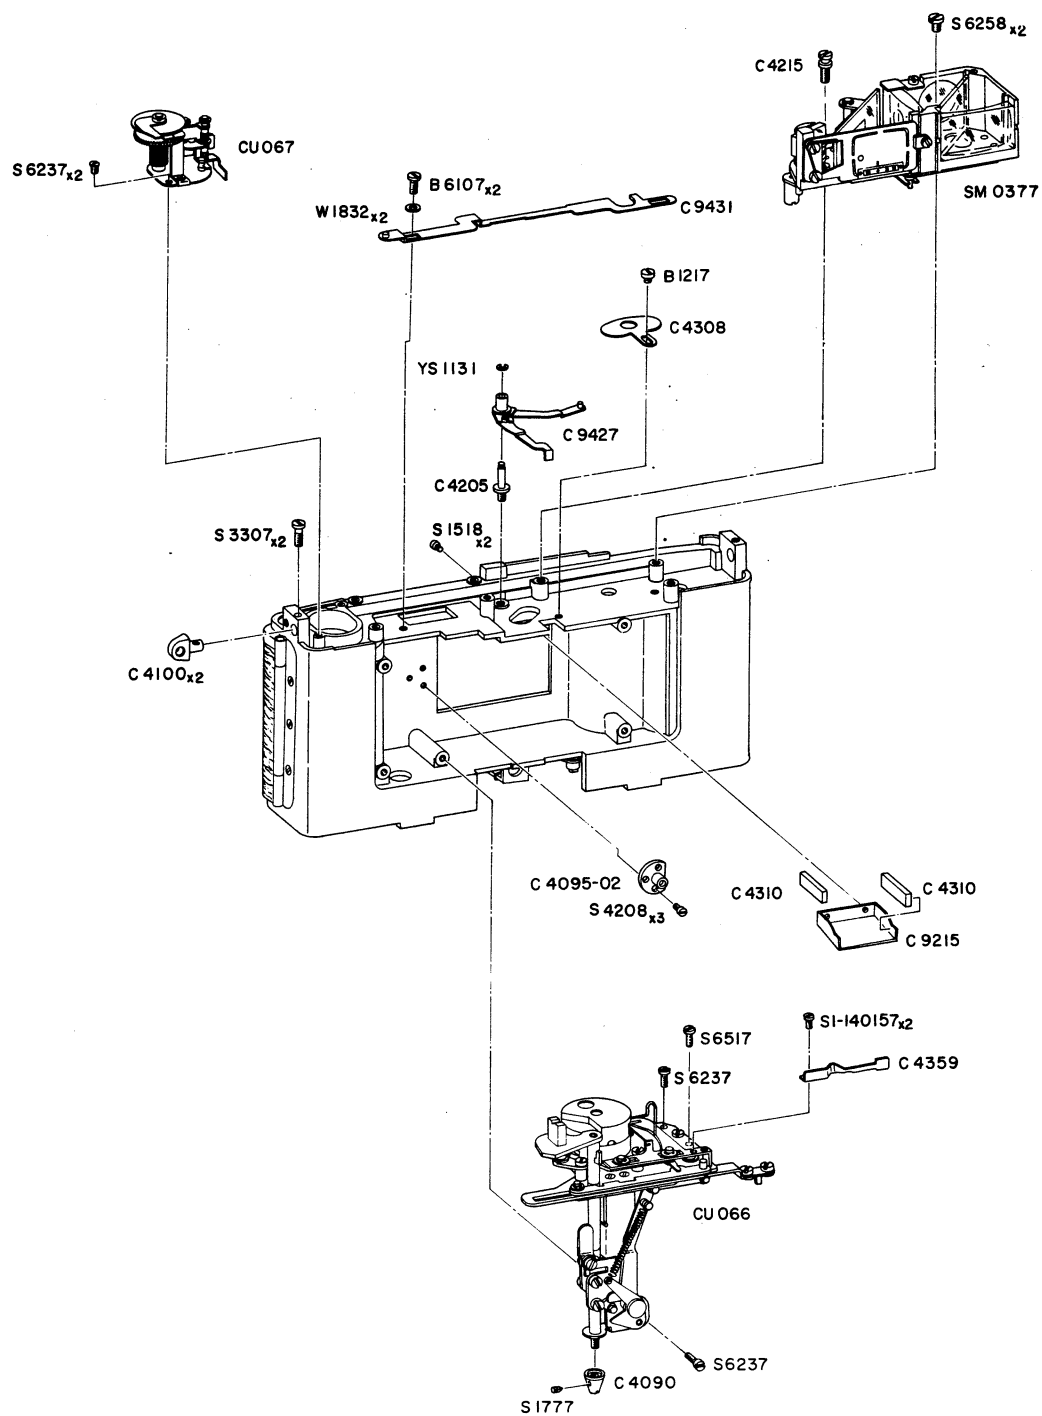

PARTS LIST

FILM COUNTER (cf. p. 7)

CU 067	Film Counter (Unit)
C 9431	Film Counter Advancing Lever (B. P.)
B 6107	Screw × 2
S 6237	Screw × 2
W 1832	Washer × 2

RANGE-VIEWFINDER OPTICAL SYSTEM (cf. p. 3)

SM 0377	Range-Viewfinder Optical System (Unit)
C 9427	Lever (B. P.)
C 4205	Shaft Screw
C 4215	Screw
S 6258	Screw × 2
YS 1131	Retaining Washer


EXPOSURE METER (cf. pp. 6 & 8)

CU 066	Exposure Meter (Unit)
	(Contains <u>ES 4003</u> : Photoelectric Cell)
C 4090	Cone
C 4095-02	Bearing
C 4359	EE-Signal
S 1777	Screw
S 4208	Screw × 3
S 6237	Screw × 2
S 6517	Screw
S1-140157	Screw × 2

SOME BASIC PARTS

C 9215	Light Shield (B. P.)
C 4100	Neck Strap Adapter × 2
C 4308	Light Shield
C 4310	Light Shield × 2
B 1217	Screw
S 1518	Screw × 2
S 3307	Screw × 2

EXPLODED VIEW of CANONET

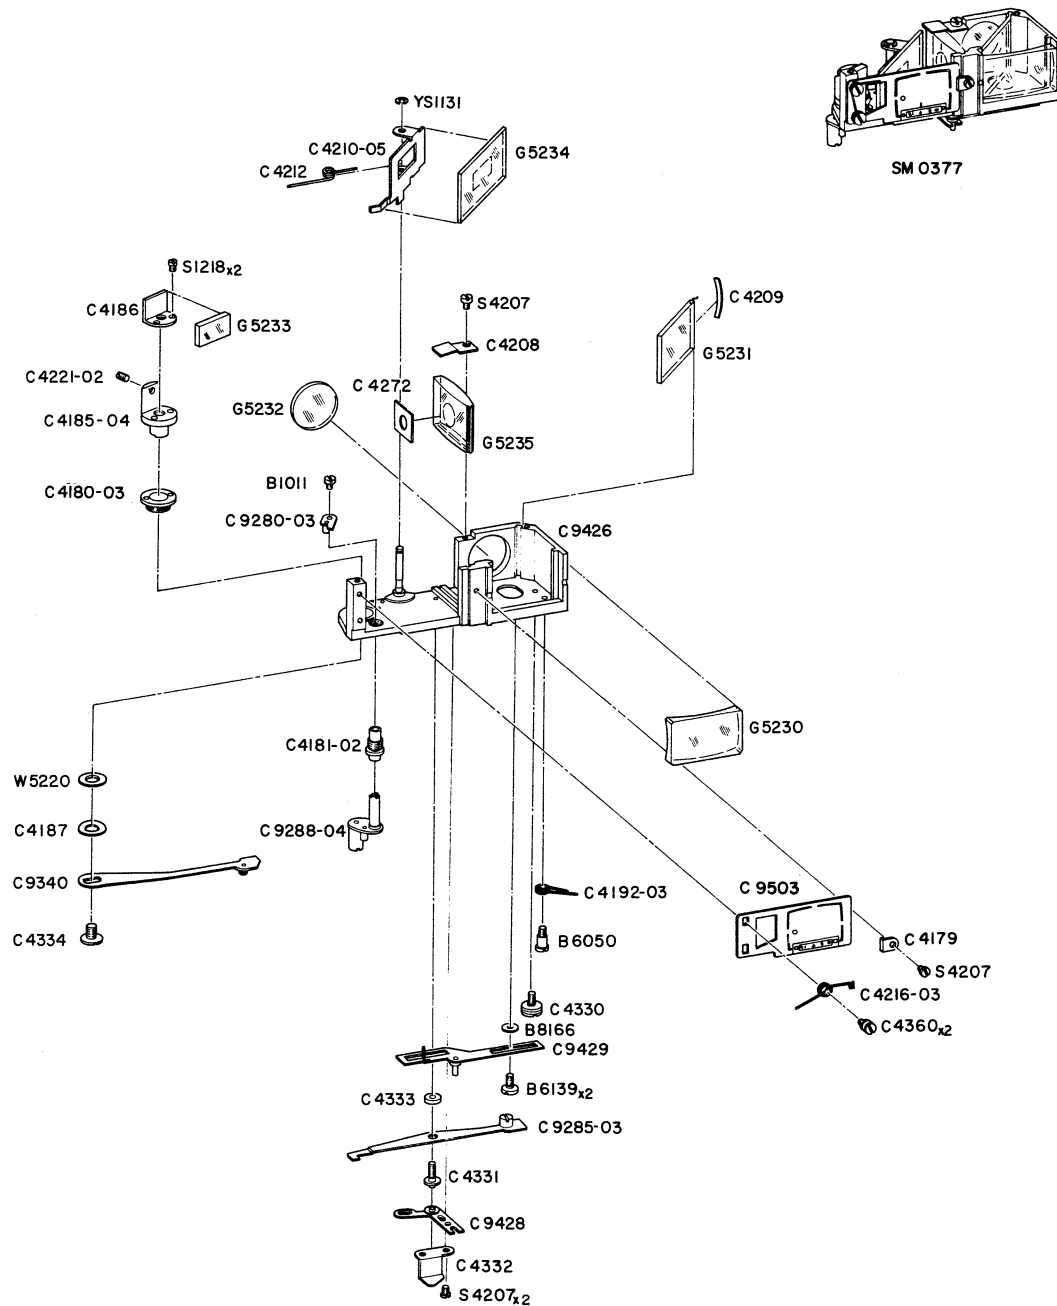

PARTS LIST

RANGE-VIEWFINDER OPTICAL SYSTEM (cf. p. 2)

SM 0377 Range-Viewfinder Optical System (Unit)

C 9280-03 Lever (B. P.)
 C 9285-03 Lever (B. P.)
 C 9288-04 Focusing Lever (B. P.)
 C 9340 Lever (B. P.)
 C 9426 Base (B. P.)
 C 9428 Connector (B. P.)
 C 9429 Aperture Index Guide (B. P.)
 C 9503 Viewfinder Mask (B. P.)
 C 4179 Holder
 C 4180-03 Bearing
 C 4181-02 Bearing
 C 4185-04 Mirror Base
 C 4186 Mirror Holder
 C 4187 Wave Washer
 C 4192-03 Spring
 C 4208 Pressure Plate
 C 4209 Spring
 C 4210-05 Supporter for Mirror
 C 4212 Spring
 C 4216-03 Spring
 C 4221-02 Adjusting Screw
 C 4272 Mask
 C 4330 Stopper Pin
 C 4331 Screw
 C 4332 Pressure Plate
 C 4333 Roller
 C 4334 Screw
 C 4360 Guide×2
 B 1011 Screw
 B 6050 Screw
 B 6139 Screw×2
 B 8166 Washer
 G 5230 Viewfinder Lens
 G 5231 Half Mirror
 G 5232 Eyepiece
 G 5233 Mirror
 G 5234 Parallax Correcting Mirror
 G 5235 Double Focus Lens
 S 1218 Screw×2
 S 4207 Screw×4


W 5220
 W 5221
 W 5222

YS 1131

Washer×N

Retaining Washer

EXPLODED VIEW
of
CANONET

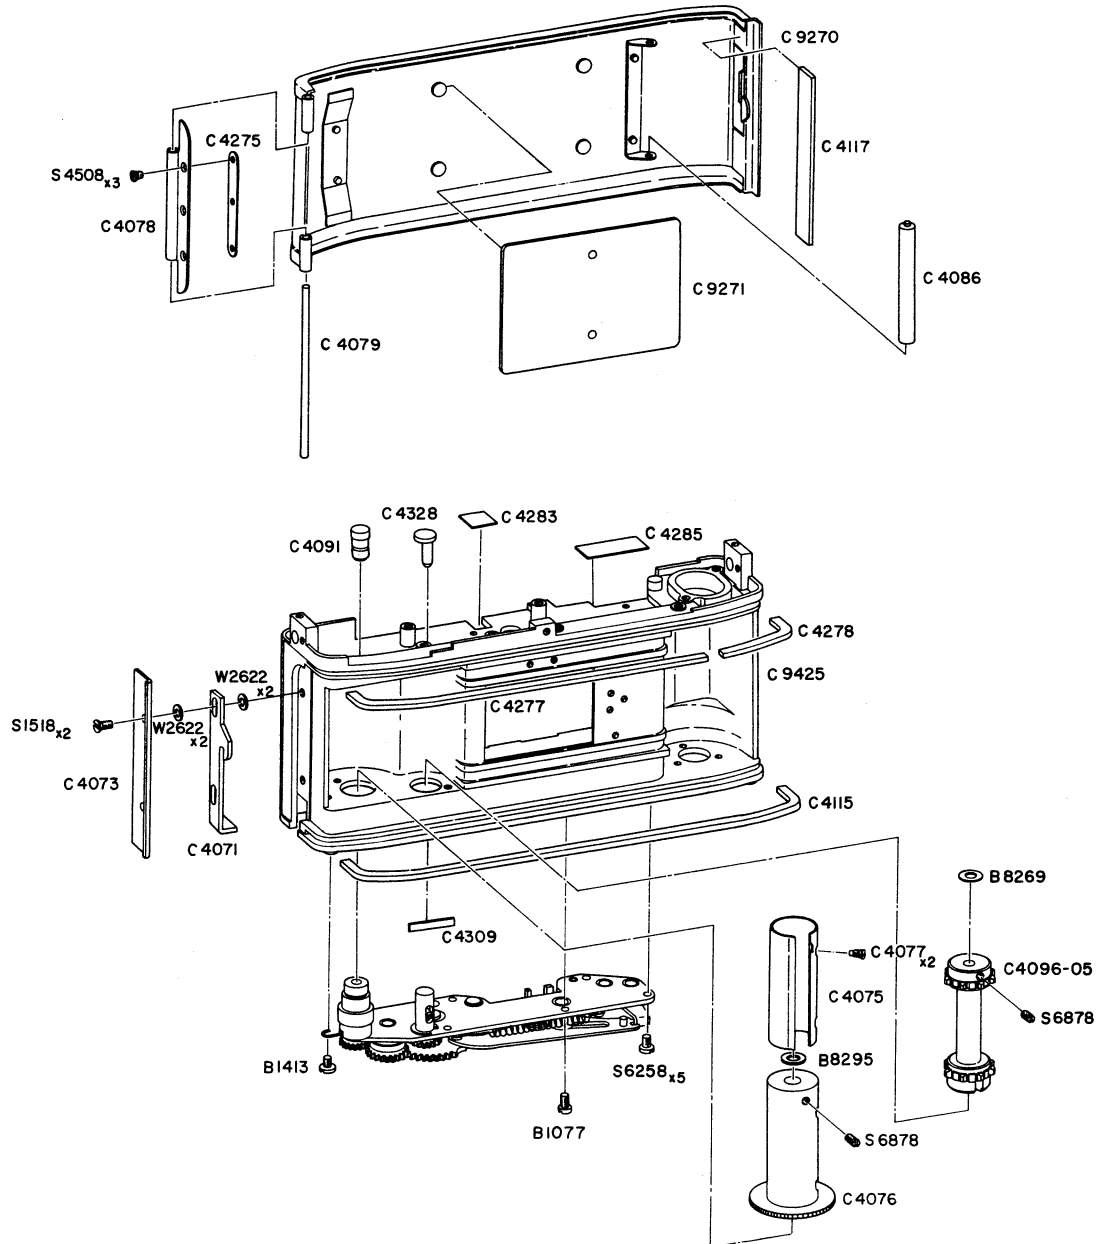

PARTS LIST

BACK COVER

C 9270	Back Cover (B. P.)
C 9271	Pressure Plate (B. P.)
C 4078	Hinge
C 4079	Shaft of Hinge
C 4086	Anti-Curl Roller
C 4117	Light Shield
C 4275	Washer
S 4508	Screw × 3

TAKE-UP SPOOL & SPROCKET

C 4075	Take-Up Spool
C 4076	Take-Up Spool Shaft
C 4077	Screw × 2
C 4091	Shaft
C 4096-05	Sprocket
C 4328	Eccentric Disk
B 8269	Washer × N
B 8270	
B 8295	Washer × N
S 6878	Screw × 2


BODY CASE

C 9425	Body Case (B. P.)
C 4071	Hook
C 4073	Hook Cover
C 4115	Light Shield
C 4277	Light Shield
C 4278	Light Shield
C 4283	Light Shield
C 4285	Light Shield
C 4309	Light Shield
S 1518	Screw × 2
W 2622	Washer × 4

WINDING MECHANISM (cf. p. 5)

B 1077	Screw
B 1413	Screw
S 6258	Screw × 5


EXPLODED VIEW
of
CANONET

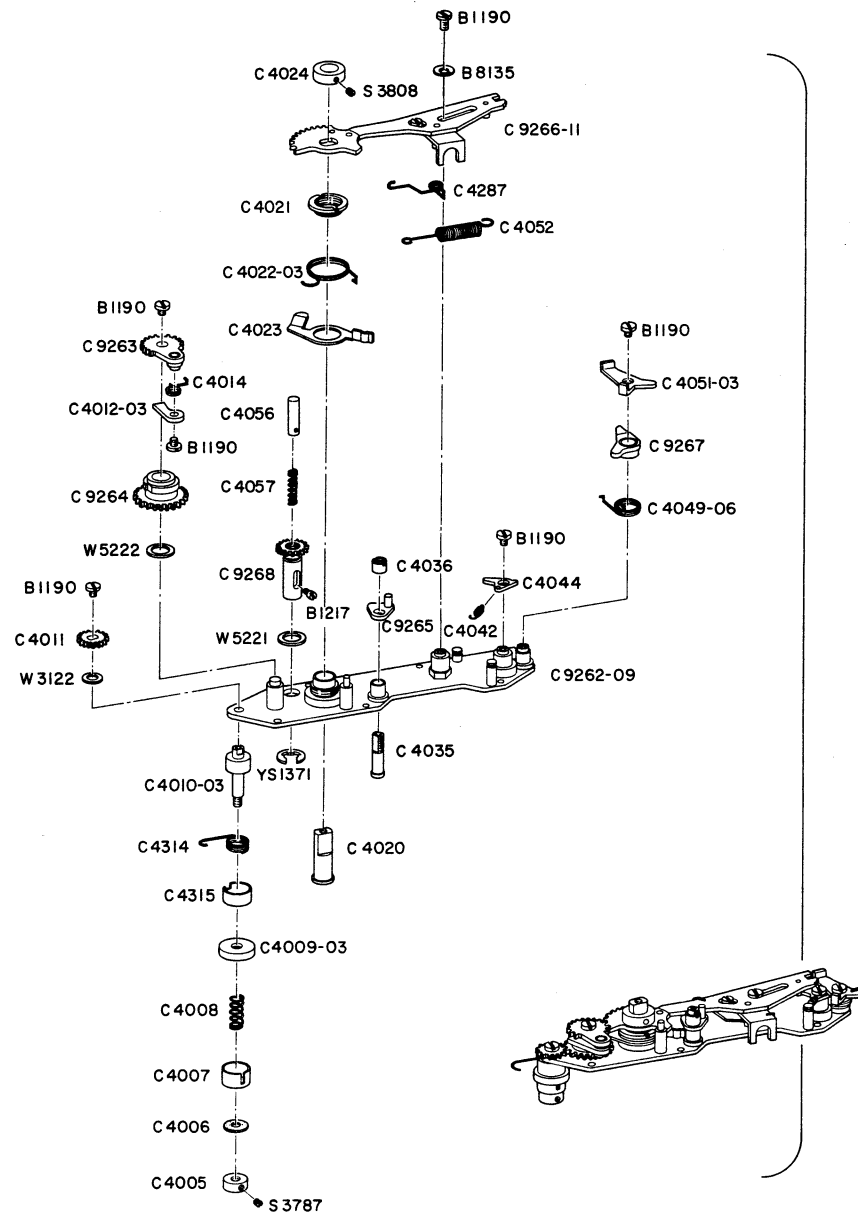

PARTS LIST

WINDING MECHANISM (cf. p. 4)		W 5222	Washer × N
		YS 1371	Retaining Washer
C 9262-09	Base Plate (B. P.)		
C 9263	Gear (B. P.)		
C 9264	Feeding Gear (B. P.)		
C 9265	Film Rewind Release Lever (B. P.)		
C 9266-11	Wind Device (B. P.)		
C 9267	Lever (B. P.)		
C 9268	Sprocket Gear (B. P.)		
C 4005	Collar		
C 4006	Washer		
C 4007	Cover		
C 4008	Spring		
C 4009-03	Cover		
C 4010-03	Wind Shaft for Spool Gear		
C 4011	Gear		
C 4012-03	Feeding Claw		
C 4014	Spring		
C 4020	Wind Lever Shaft		
C 4021	Pin Face Nut		
C 4022-03	Spring		
C 4023	Clutch Lever		
C 4024	Collar		
C 4035	Shaft Screw		
C 4036	Nut		
C 4042	Spring		
C 4044	Lever		
C 4049-06	Spring		
C 4051-03	Lever		
C 4052	Spring		
C 4056	Clutch Shaft		
C 4057	Spring		
C 4287	Spring		
C 4314	Spring		
C 4315	Collar		
B 1190	Screw × 6		
B 1217	Screw		
B 8135	Washer		
S 3787	Screw		
S 3808	Screw		
W 3121	Washer × N		
W 3122			
W 5221	Washer		

EXPLODED VIEW
of
CANONET

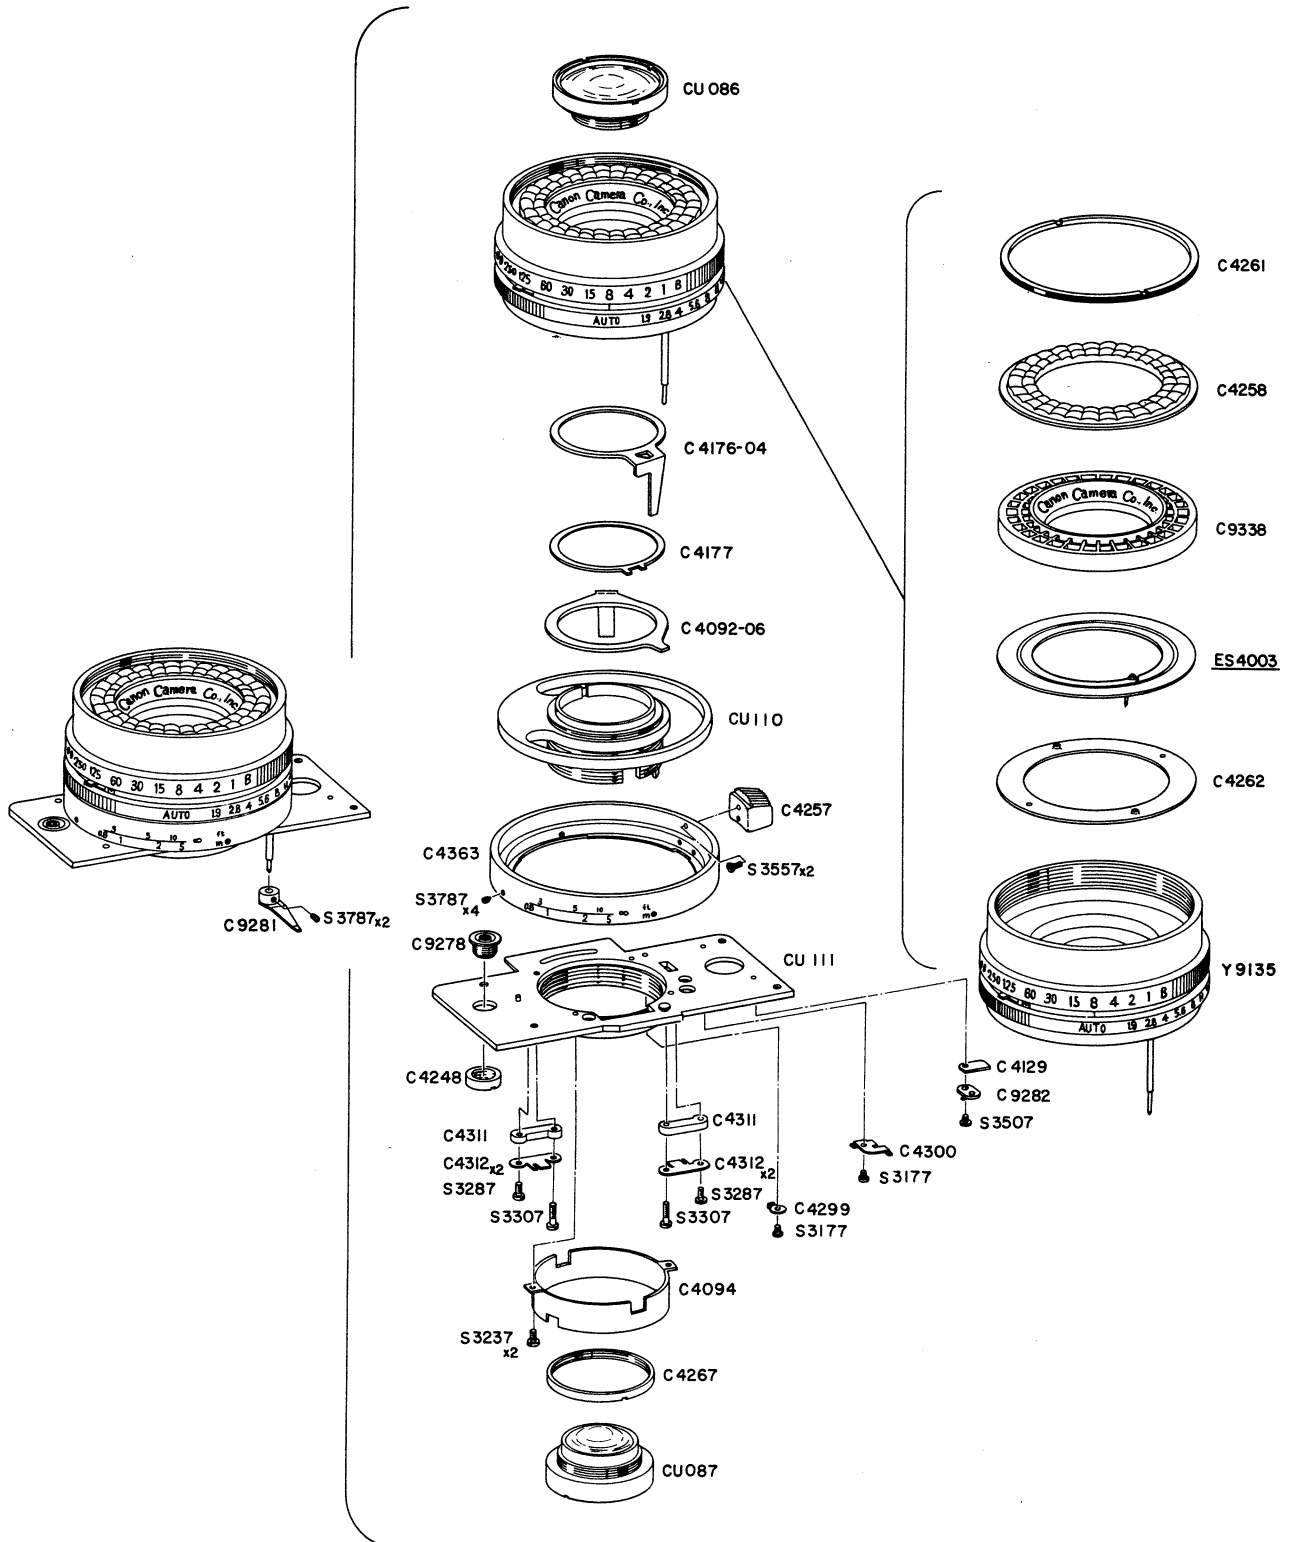

PARTS LIST



OBJECTIVE LENS

CU 086	Front Lens (Unit)
CU 087	Rear Lens (Unit)
CU 110	Helicoid (Unit)
CU 111	Front Panel (Unit)
C 9278	Flash Socket (B. P.)
C 9281	Lever (B. P.)
C 9282	Contact (B. P.)
C 9338	Lattice Window Frame (B. P.)
C 4092-06	Ring for Shutter Charge
C 4094	Light Shield
C 4129	Insulator
C 4176-04	Ring for Shutter Release
C 4177	Intermediate Ring
C 4248	Nut
C 4252	Flange
C 4257	Focusing Knob
C 4258	Window
C 4261	Assemble Collar
C 4262	Pressure Plate
C 4267	Collar
C 4299	Cord Holder
C 4300	Cord Holder
C 4311	Guide Holder × 2
C 4312	Guide × 4
C 4363	Focusing Ring
S 3177	Screw × 2
S 3237	Screw × 2
S 3287	Screw × 2
S 3307	Screw × 2
S 3507	Screw
S 3557	Screw × 2
S 3787	Screw × 6
Y 9135	Shutter Unit

EXPOSURE METER (cf. pp. 2 & 8)

ES 4003 Photoelectric Cell is included in
CU 066 Exposure Meter and is not supplied
as a separate part.

EXPLODED VIEW
of
CANONET

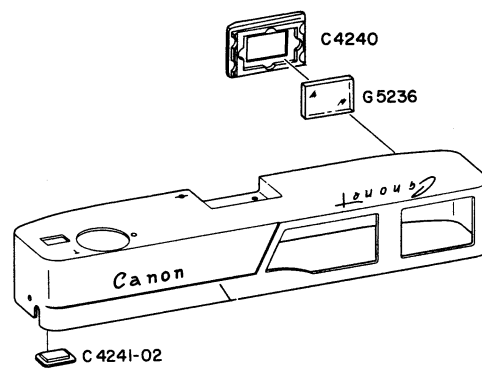

PARTS LIST


TOP COVER (cf. p. 1)

C 4240	Eyepiece Holder
C 4241-02	Film Counter Window
G 5236	Eyepiece

FILM COUNTER (cf. p. 2)

C 4238	Nut
S 3177	Screw
YS 1101	Retaining Washer
YS 1131	Retaining Washer × 3

EXPLODED VIEW
of
CANONET

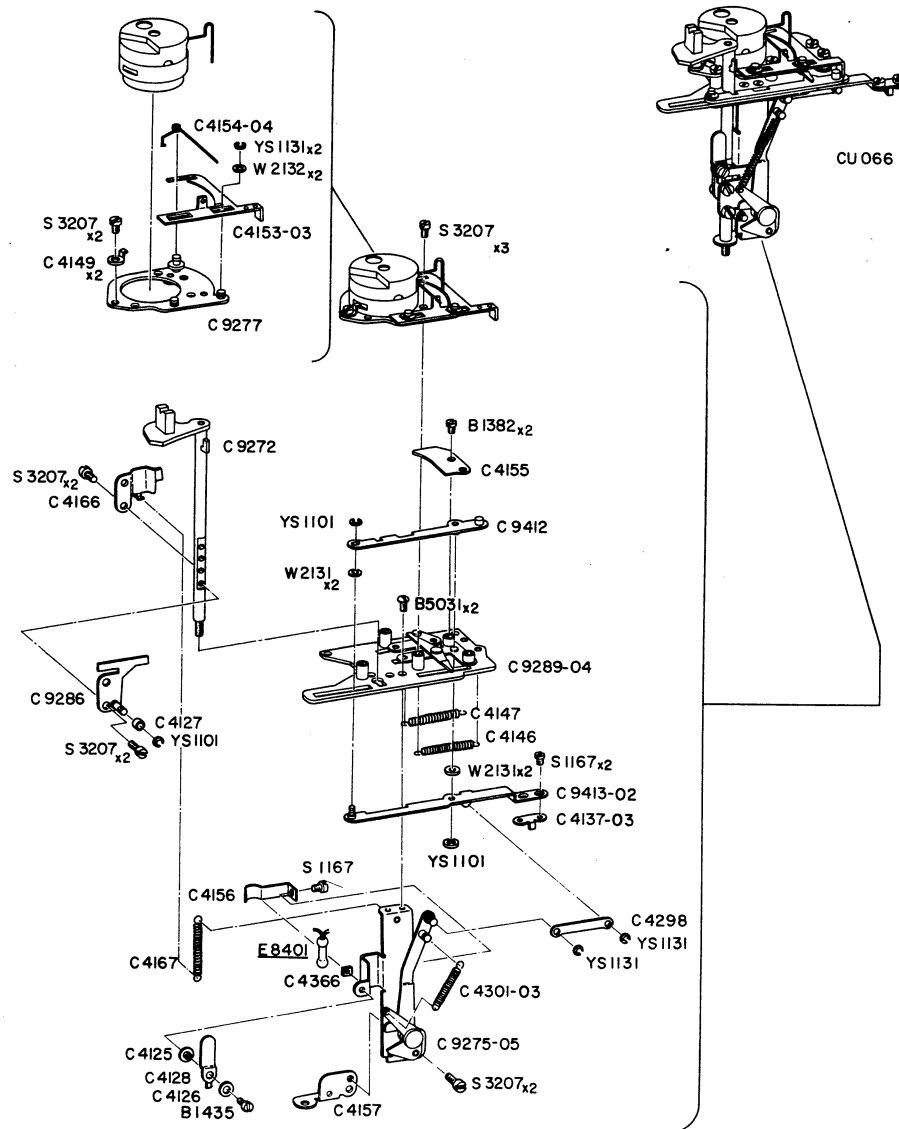

PARTS LIST

EXPOSURE METER (cf. pp. 2 & 6)

CU 066	Exposure Meter (Unit)
C 9272	Shutter Shaft (B. P.)
C 9275-05	Drive Lever Unit (B. P.)
C 9277	Base (B. P.)
C 9286	Lever for Shutter Release (B. P.)
C 9289-04	EE-Calculator (B. P.)
C 9412	Moving Arm (B. P.)
C 9413-02	Moving Arm (B. P.)
C 4125	Insulator
C 4126	Insulator
C 4127	Collar
C 4128	Contact
C 4137-03	Lever for Mask
C 4146	Coil Spring
C 4147	Coil Spring
C 4149	Galvanometer Holder × 2
C 4153-03	Moving Guide
C 4154-04	Spring
C 4155	Cam
C 4156	Resistor Holder
C 4157	Bearing for Shutter Shaft
C 4166	Spring Holder
C 4167	Coil Spring
C 4298	Connecting Rod
C 4301-03	Coil Spring
C 4366	Nut
B 1382	Screw × 2
B 1435	Screw
B 5031	Screw × 2
S 1167	Screw × 3
S 3207	Screw × 11
W 2131	Washer × 4
W 2132	Washer × 2
YS 1101	Retaining Washer × 3
YS 1131	Retaining Washer × 4

INDEX OF PART NUMBERS

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
CU 066	2, 8	C 9431	2	C 4079	4	C 4205	2
CU 067	2	C 9487	1	C 4086	4	C 4208	3
CU 086	6	C 9488	4	C 4090	2	C 4209	3
CU 087	6	C 9503	3	C 4091	4	C 4210-05	3
CU 110	6			C 4092-06	6	C 4212	3
CU 111	6			C 4093	1	C 4215	2
				C 4094	6	C 4216-03	3
				C 4095-02	2	C 4221-02	3
				C 4096-05	4	C 4238	7
		C 4002	1	C 4098	1	C 4240	7
		C 4005	5	C 4099	1	C 4241-02	7
SM 0377	2, 3	C 4006	5	C 4100	2	C 4248	6
		C 4007	5	C 4101	1	C 4257	6
		C 4008	5	C 4102	1	C 4258	6
		C 4009-03	5	C 4103	1	C 4261	6
		C 4010-03	5	C 4104	1	C 4262	6
		C 4011	5	C 4106	1	C 4267	6
		C 4012-03	5	C 4107	1	C 4272	3
C 9215	2	C 4014	5	C 4108	1	C 4275	4
C 9252	1	C 4020	5	C 4109	1	C 4277	4
C 9262-09	5	C 4021	5	C 4113-04	1	C 4278	4
C 9263	5	C 4022-03	5	C 4114	1	C 4279	1
C 9264	5	C 4023	5	C 4115	4	C 4280	1
C 9265	5	C 4024	5	C 4117	4	C 4283	4
C 9266-11	5	C 4035	5	C 4118	1	C 4285	4
C 9267	5	C 4036	5	C 4125	8	C 4287	5
C 9268	5	C 4042	5	C 4126	8	C 4290	1
C 9269	1	C 4044	5	C 4127	8	C 4298	8
C 9270	4	C 4049-06	5	C 4128	8	C 4299	6
C 9271	4	C 4051-03	5	C 4129	6	C 4300	6
C 9272	8	C 4052	5	C 4137-03	8	C 4301-03	8
C 9275-05	8	C 4056	5	C 4146	8	C 4304	1
C 9277	8	C 4057	5	C 4147	8	C 4307	1
C 9278	6	C 4058	1	C 4149	8	C 4308	2
C 9280-03	3	C 4059	1	C 4153-03	8	C 4309	4
C 9281	6	C 4061-05	1	C 4154-04	8	C 4310	2
C 9282	6	C 4062-05	1	C 4155	8	C 4311	6
C 9285-03	3	C 4064	1	C 4156	8	C 4312	6
C 9286	8	C 4065	1	C 4157	8	C 4314	5
C 9288-04	3	C 4066	1	C 4162	1	C 4315	5
C 9289-04	8	C 4067-05	1	C 4166	8	C 4316	1
C 9290-10	1	C 4068	1	C 4167	8	C 4317	1
C 9338	6	C 4069	1	C 4176-04	6	C 4318	6
C 9340	3	C 4070-03	1	C 4177	6	C 4322	6
C 9412	8	C 4071	4	C 4179	3	C 4323	1
C 9413-02	8	C 4072	1	C 4180	3	C 4325	1
C 9425	4	C 4073	4	C 4181-02	3	C 4328	4
C 9426	3	C 4075	4	C 4185-04	3	C 4330	3
C 9427	2	C 4076	4	C 4186	3	C 4331	3
C 9428	3	C 4077	4	C 4187	3	C 4332	3
C 9429	3	C 4078	4	C 4192-03	3	C 4333	3

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
C 4334	3	S 1167	8	Y 9003	1
C 4359	2	S 1218	3	Y 9134	6
C 4360	3	S 1518	2,4	Y 9135	6
C 4363	6	S 1777	2		
C 4364	6	S 3177	1,6,7		
C 4366	8	S 3207	8		
		S 3237	6		
		S 3287	6		
		S 3307	2,6	YS 1101	7,8
		S 3507	6	YS 1131	2,3,7,8
		S 3557	6	YS 1371	5
B 1011	3	S 3587	1		
B 1077	4	S 3787	5,6		
B 1190	5	S 3808	5		
B 1217	2,5	S 4178	1		
B 1353	1	S 4207	3		
B 1355	1	S 4208	2		
B 1356	1	S 4508	4		
B 1382	8	S 4665	1		
B 1413	4	S 6237	2		
B 1435	8	S 6258	2,4		
B 4021	1	S 6517	2		
B 5031	8	S 6558	1		
B 6050	3	S 6577	1		
B 6107	2	S 6878	4		
B 6139	3	S1-140157	2		
B 8135	5				
B 8166	3				
B 8269	4				
B 8270	4				
B 8295	4				
		W 1832	2		
		W 2131	8		
		W 2132	8		
		W 2622	4		
<u>E 8401</u>	8	W 3121	5		
<u>ES 4003</u>	6	W 3122	5		
		W 5220	3		
		W 5221	3,5		
		W 5222	3,5		
G 5229	1				
G 5230	3				
G 5231	3				
G 5232	3				
G 5233	3				
G 5234	3				
G 5235	3				
G 5236	1				

CANON REPAIR MANUAL

SHUTTER for CANONET 1.2

(REF.NO. 1-30202)


(REF.NO. 1-30206)

CANON CAMERA CO., INC.

TOKYO, JAPAN

EXPLODED VIEW
of
SHUTTER for CANONET 1.2

REF. NO. 1-30202
REF. NO. 1-30206

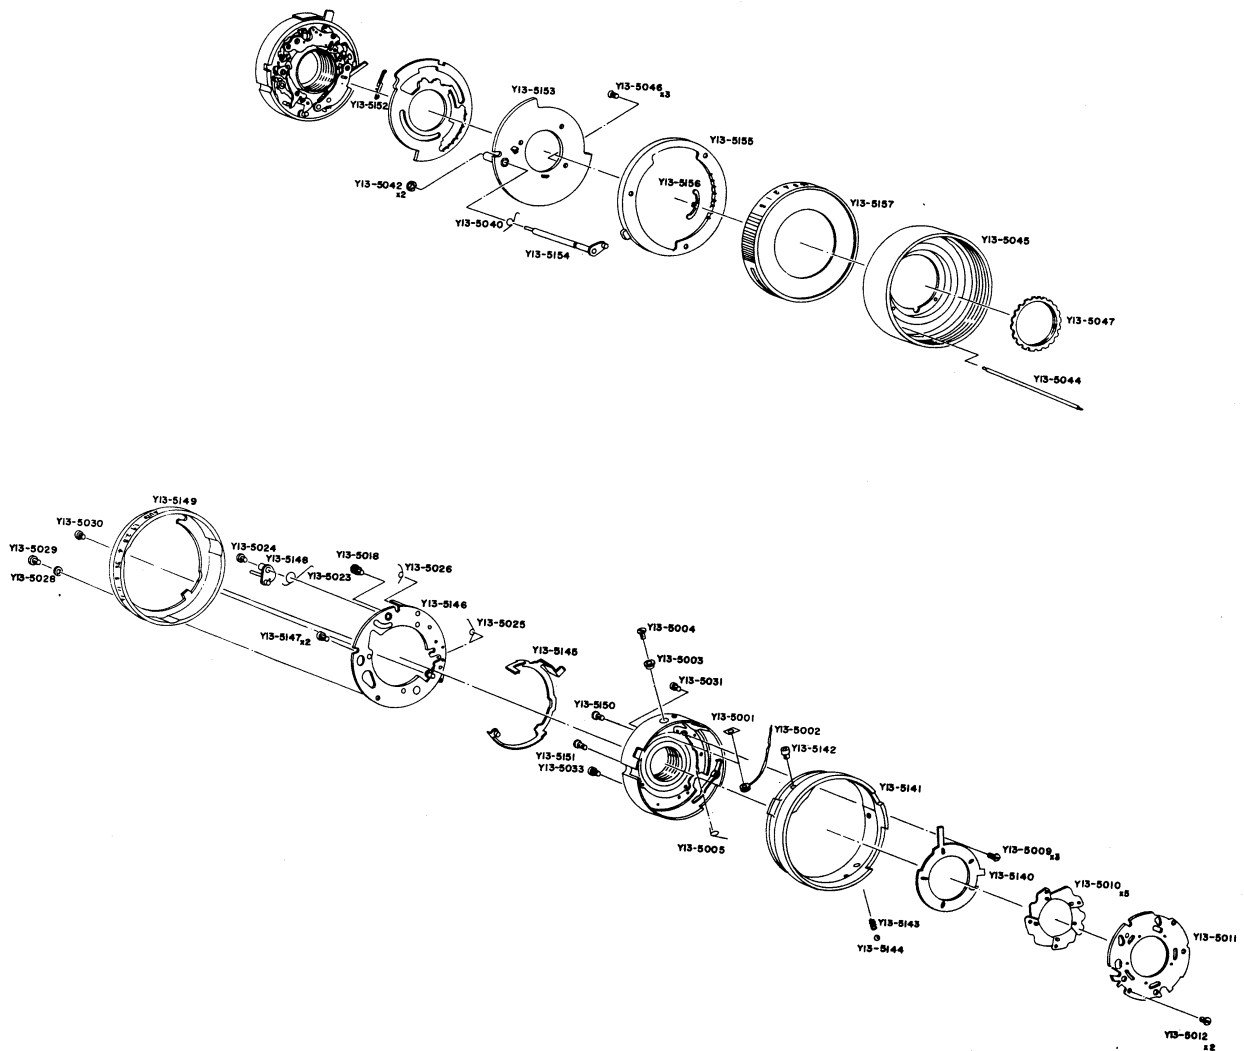

REF. NO. 1-30202

REF. NO. 1-30206

1

PARTS LIST

Y13-5001	Insulator Sheet
Y13-5002	Flash Lead Wire
Y13-5003	Insulator Bush
Y13-5004	Screw
Y13-5005	Spring
Y13-5009	Screw x 3
Y13-5010	Diaphragm Blade x 5
Y13-5011	Blade Retaining Plate
Y13-5012	Screw x 2
Y13-5018	Screw
Y13-5023	Spring
Y13-5024	Screw
Y13-5025	Spring
Y13-5026	Spring
Y13-5028	Washer
Y13-5029	Screw
Y13-5030(1.8)	Adjusting Screw
Y13-5030(1.9)	Such numbers (1.8), (1.9)
	and (2.6) indicate diame-
	ter of Adjusting Screws.
	There are some 9 kind of
	screw begins with diame-
	ter 1.8 ϕ increase 0.1 ϕ
	each ends 2.6 ϕ .
Y13-5030(2.5)	Standard screw is
Y13-5030(2.6)	Y13-5030(20).
Y13-5031	Screw
Y13-5033	Screw
Y13-5040	Spring
Y13-5042	Retaining Washer x 2
Y13-5044	Lead Wire
Y13-5045	Hood Ring
Y13-5046	Screw x 3
Y13-5047	Nut
Y13-5140	Diaphragm Control Ring
Y13-5141	Marking Ring
Y13-5142	Screw x 3
Y13-5143	Coil Spring
Y13-5144	Steel Ball
Y13-5145	Contact Change Ring
Y13-5146	Rear Cover Plate
Y13-5147	Screw x 2
Y13-5148	Automatic Diaphragm Lever
Y13-5149	Aperture Scale Ring
Y13-5150	Screw
Y13-5151	Screw
Y13-5152	Click Spring
Y13-5153	Front Cover Plate
Y13-5154	Coupling Shaft
Y13-5155	ASA Cam Ring
Y13-5156	Click Spring
Y13-5157	Shutter Speed Ring


CANON REPAIR MANUAL

SHUTTER for CANONET 3 **(REFERENCE NO. 1-30208)**

CANON CAMERA COMPANY INC.
TOKYO, JAPAN

EXPLODED VIEW
of
SHUTTER for CANONET 3

REF. NO. 1-30208

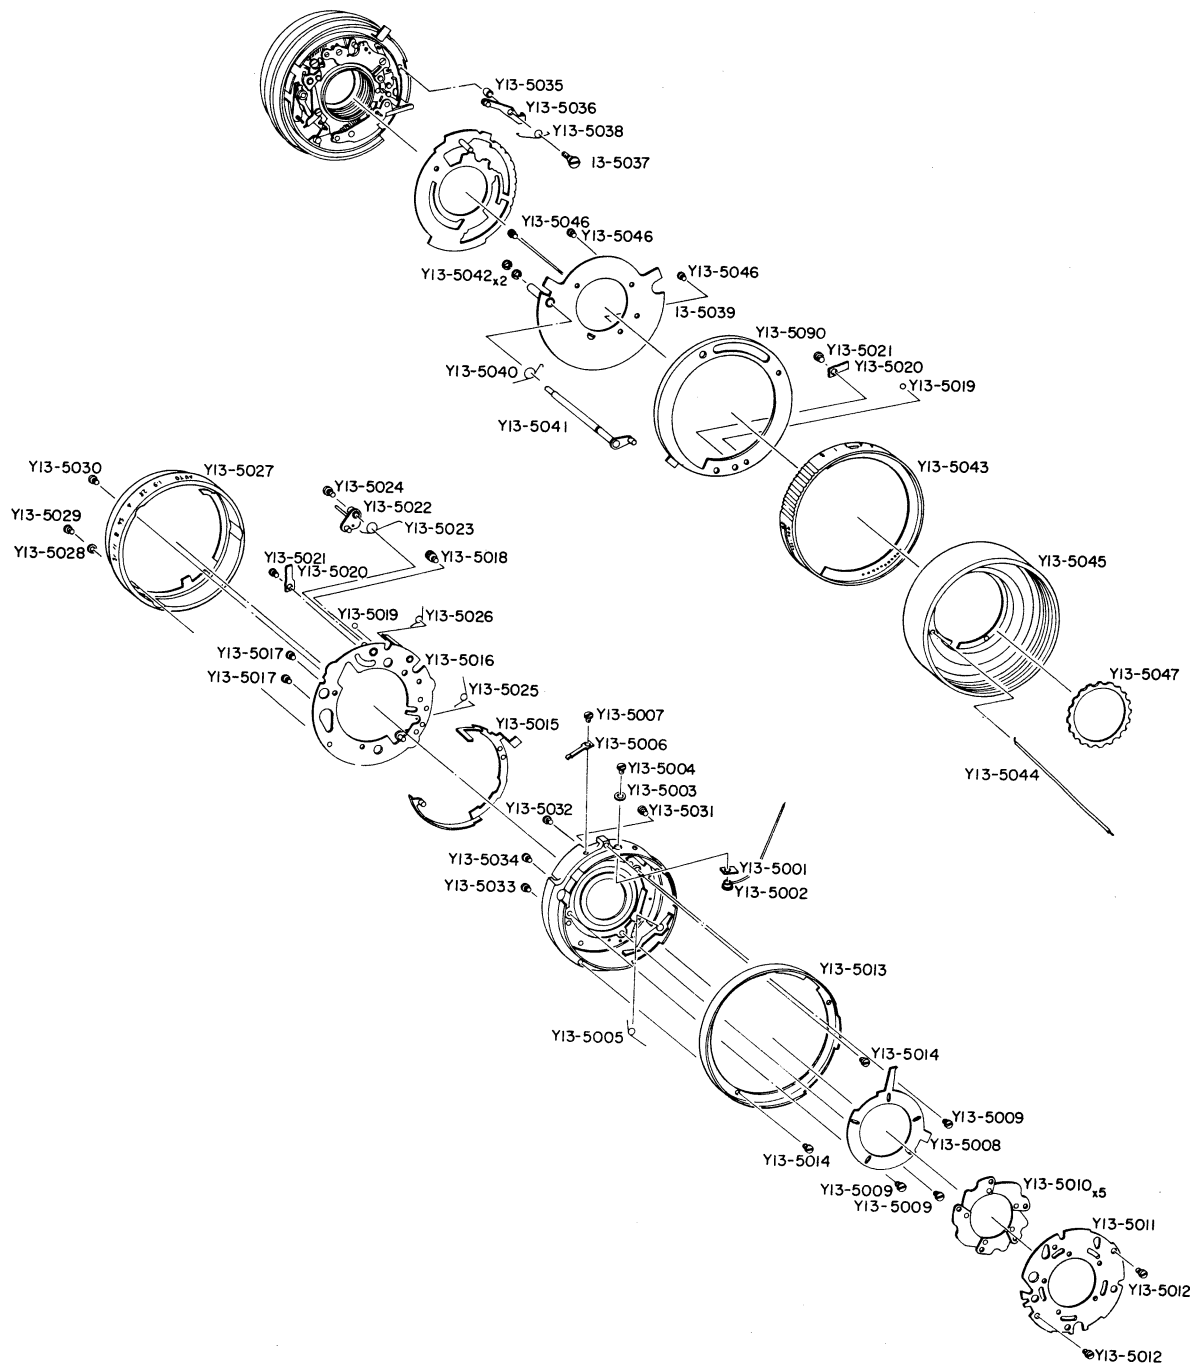


PARTS LIST

Y13-5001	Insulator Sheet	Y13-5044	Lead Wire
Y13-5002	Flash Lead Wire	Y13-5045	Hood Ring
Y13-5003	Insulator Bush	Y13-5046	Screw x 3
Y13-5004	Screw	Y13-5047	Nut
Y13-5005	Spring	Y13-5090	ASA Cam Ring
Y13-5006	Click Spring		
Y13-5007	Screw		
Y13-5008	Diaphragm Control Ring		
Y13-5009	Screw x 3		
Y13-5010	Diaphragm Blade x 5		
Y13-5011	Blade Retaining Plate		
Y13-5012	Screw x 2		
Y13-5013	Marking Ring		
Y13-5014	Screw x 2		
Y13-5015	Contact Change Ring		
Y13-5016	Rear Cover Plate		
Y13-5017	Screw x 2		
Y13-5018	Screw		
Y13-5019	Steel Ball x 2		
Y13-5020	Click Spring x 2		
Y13-5021	Screw x 2		
Y13-5022	Automatic Diaphragm Lever		
Y13-5023	Spring		
Y13-5024	Screw		
Y13-5025	Spring		
Y13-5026	Spring		
Y13-5027	Diaphragm Regulating Ring		
Y13-5028	Washer		
Y13-5029	Screw		
Y13-5030(1.8)	Adjusting Screw		
Y13-5030(1.9)	Such numbers (1.8), (1.9) and (2.6) indicate diameter of adjusting Screws. There are some 9 Kind of Screw begins with diame- ter 1.8 ϕ increase 0.1 ϕ each ends 2.6 ϕ .		
Y13-5030(2.5)	Standard screw is		
Y13-5030(2.6)	Y13-5030(2.0).		
Y13-5031	Screw		
Y13-5032	Screw		
Y13-5033	Screw		
Y13-5034	Screw		
Y13-5035	Spacer		
Y13-5036	B Lock Lever		
Y13-5037	Screw		
Y13-5038	Spring		
Y13-5039	Front Cover Plate		
Y13-5040	Spring		
Y13-5041	Coupling Shaft		
Y13-5042	Snap Ring x 2		
Y13-5043	Time Regulating Ring		

EXPLODED VIEW
of
SHUTTER for CANONET 3

REF. NO. 1-30208

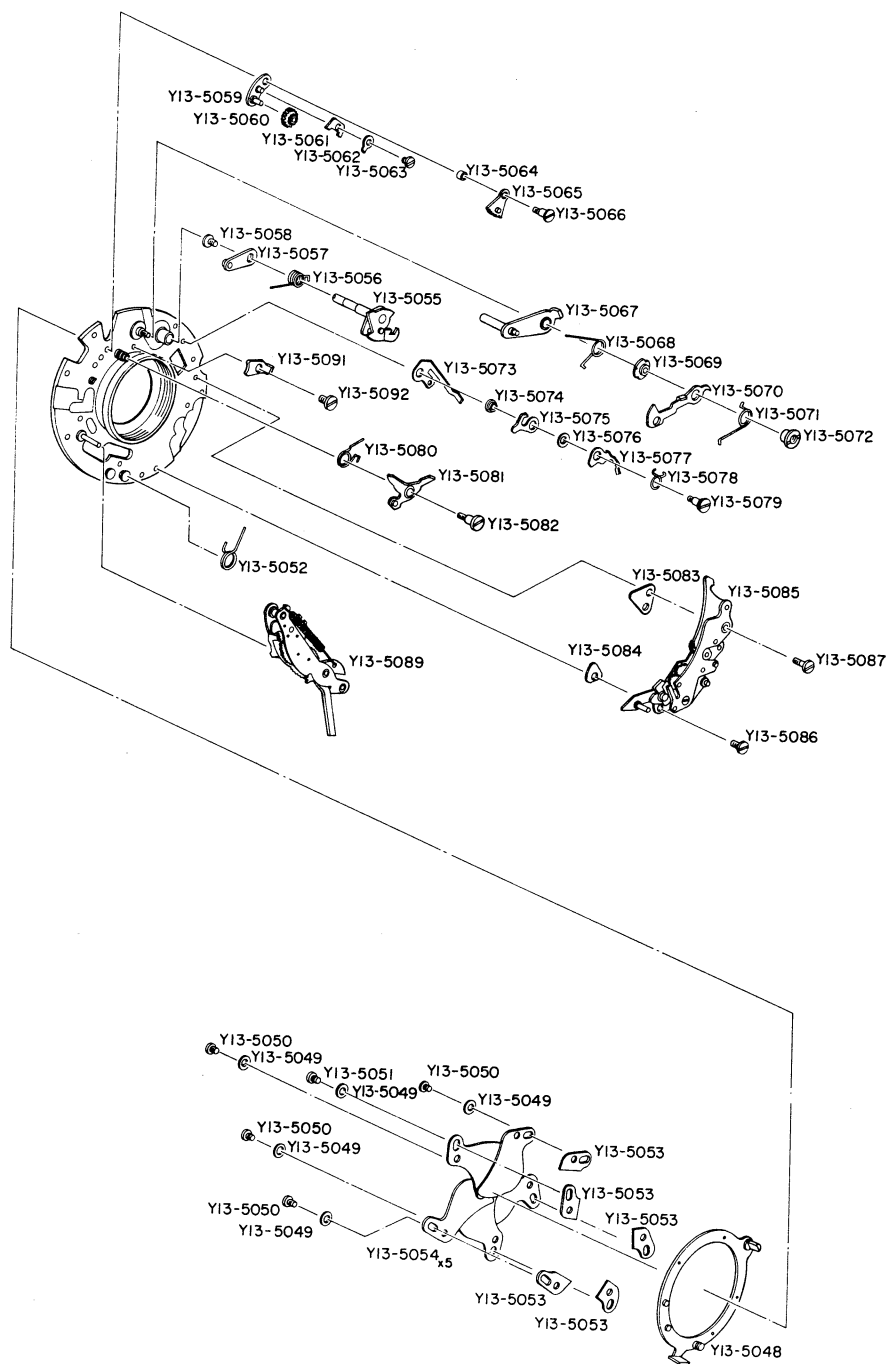

SCALE 1-1.5

CANON CAMERA CO., INC. ©

PARTS LIST

Y13-5048	Sector Ring
Y13-5049	Washer x 5
Y13-5050	Screw x 3
Y13-5051	Screw x 2
Y13-5052	Spring
Y13-5053	Sub Shutter Blade x 5
Y13-5054	Shutter Blade x 5
Y13-5055	Main Cocking Lever
Y13-5056	Spring
Y13-5057	Rear Cocking Lever
Y13-5058	Screw
Y13-5059	M-Contact Governor Plate
Y13-5060	Cog-Wheel
Y13-5061	Anchor
Y13-5062	Cog-Wheel Supporter
Y13-5063	Screw
Y13-5064	Segment Gear Collar
Y13-5065	Segment Gear
Y13-5066	Screw
Y13-5067	Release Lever
Y13-5068	Spring
Y13-5069	M-Governor Regulating Ring
Y13-5070	M-Governor Driver
Y13-5071	Spring
Y13-5072	Fixing Nut
Y13-5073	X-Contact Spring
Y13-5074	Retainer for Contact Lever
Y13-5075	X-Contact Lever
Y13-5076	Contact Lever Washer
Y13-5077	M-Contact Lever
Y13-5078	Spring
Y13-5079	Screw
Y13-5080	Spring
Y13-5081	B Lever
Y13-5082	Screw
Y13-5083	Governor Sheet A
Y13-5084	Governor Sheet B
Y13-5085	Slow Governor
Y13-5086	Screw
Y13-5087	Screw
Y13-5089	Self-Timer
Y13-5091	Tension Stopper
Y13-5092	Screw

REF. NO. 1-30208

INDEX OF PARTS NUMBER

PART NO.	PAGE	PART NO.	PAGE
Y13-5001	1	Y13-5053	2
Y13-5002	1	Y13-5054	2
Y13-5003	1	Y13-5055	2
Y13-5004	1	Y13-5056	2
Y13-5005	1	Y13-5057	2
Y13-5006	1	Y13-5058	2
Y13-5007	1	Y13-5059	2
Y13-5008	1	Y13-5060	2
Y13-5009	1	Y13-5061	2
Y13-5010	1	Y13-5062	2
Y13-5011	1	Y13-5063	2
Y13-5012	1	Y13-5064	2
Y13-5013	1	Y13-5065	2
Y13-5014	1	Y13-5066	2
Y13-5015	1	Y13-5067	2
Y13-5016	1	Y13-5068	2
Y13-5017	1	Y13-5069	2
Y13-5018	1	Y13-5070	2
Y13-5019	1	Y13-5071	2
Y13-5020	1	Y13-5072	2
Y13-5021	1	Y13-5073	2
Y13-5022	1	Y13-5074	2
Y13-5023	1	Y13-5075	2
Y13-5024	1	Y13-5076	2
Y13-5025	1	Y13-5077	2
Y13-5026	1	Y13-5078	2
Y13-5027	1	Y13-5079	2
Y13-5028	1	Y13-5080	2
Y13-5029	1	Y13-5081	2
Y13-5030	1	Y13-5082	2
Y13-5031	1	Y13-5083	2
Y13-5032	1	Y13-5084	2
Y13-5033	1	Y13-5085	2
Y13-5034	1	Y13-5086	2
Y13-5035	1	Y13-5087	2
Y13-5036	1	Y13-5089	2
Y13-5037	1	Y13-5090	1
Y13-5038	1	Y13-5091	2
Y13-5039	1	Y13-5092	2
Y13-5040	1		
Y13-5041	1		
Y13-5042	1		
Y13-5043	1		
Y13-5044	1		
Y13-5045	1		
Y13-5046	1		
Y13-5047	1		
Y13-5048	2		
Y13-5049	2		
Y13-5050	2		
Y13-5051	2		
Y13-5052	2		

CANON REPAIR GUIDE

CANONET

(REFERENCE NO. C-30206)

CANON CAMERA COMPANY, INC.

TOKYO, JAPAN

TABLE OF CONTENTS

RANGE-VIEWFINDER

When the double-image of the Range-Viewfinder does not align.....	4
When the Viewfinder Mask does not move smoothly.....	4
When the Aperture Scale Indicator inside the Range-Viewfinder out of order	4
When the Red Mark does not appear normally	5

EXPOSURE METER

When the Exposure Meter does not work	6
---	---

FILM COUNTER

When the Film Counter does not move forward	7
When the Film Counter does not return	7

WINDING MECHANISM

When the Shutter does not charge	8
When the Trigger Lever does not move	8
When the Trigger Lever runs idle or when it winds many times before the Shutter Button is pressed down	8
When the Shutter Button cannot be pressed down	9
When the Shutter Button does not return to its original position	9
When the film cannot be rewound or when the film catches.....	9

INCORRECT FOCUS

When the back focus becomes out of focus	10
When the double-image of the Range-Viewfinder does not align.....	10

RANGE-VIEWFINDER

When the double-image of the Range-Viewfinder does not align, it should be adjusted in the following manner:


Turn Screw C4221 when the deviation of the double-image is vertical.

Turn the Eccentric Screw of Lever C9285 to right or left when the deviation of the double-image is horizontal.

Care must be taken not to turn C4221 and the Eccentric Screw of C9285 too far as the screw thread may become worn or its calking may become loosened.

Cover Plate C9252 need not be removed when adjusting the double-image.

See Repair Manual p.3.

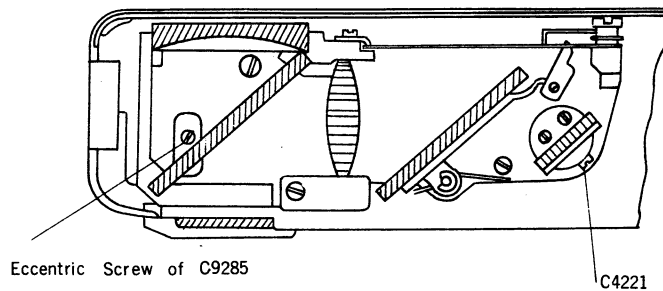

When the Finder Mask does not move smoothly even after turning the Focusing Ring, the following adjustments should be made.

1. Check to see if Spring C4216 has become weak. If so, bend C4216 to give it more strength, or replace it with a new one.

See Repair Manual p.3.

2. When the pressure of Holder C4179 is too strong, bend C4179 to weaken it.

See Repair Manual p.3.

3. When Viewfinder Mask C9430 is touching Cover Plate C9252, make the proper corrections by bending C9252.

See Repair Manual pp.1&3.

4. If Viewfinder Mask C9430 is touching Aperture Scale Index C9429 or EE-Signal C4359, bend either C9429 or C4359 so that there will be a gap of approximately 1 mm.

See Repair Manual pp.2&3.

When the Aperture Scale Indicator inside the Range-Viewfinder out of order, the following adjustments should be made:

1. Make necessary adjustments by turning the Eccentric Screw of Lever C9427. If after adjustment the needle should again become unaligned, it means that the calking of the Eccentric Screw has become loose. In this case, replace C9427.

See Repair Manual p.2.

2. If the needle of Aperture Scale Index C9429 is bent and is touching Viewfinder Mask C9430, adjust by bending the needle.

See Repair Manual p.3.

3. If Lever C9427 and Lever for Mask C4137 are out of place, adjustments should be made by bending C9427 upwards.

See Repair Manual pp.2&8.

4. If Lever C9427 and Arm C9428 are out of place the upward and downward play of both should be adjusted with a washer.

See Repair Manual pp.2&3.

5. If the movement of C9427 is impeded by Lever C9427 and Film Counter Advancing Lever C9431 pressing against it, C9431 should be bent and adjusted so that it will not touch.

See Repair Manual p.2.

When the Red Mark does not appear normally, that is, when the Red Mark appears even though the Shutter has been set for automatic photography, or when the Red Mark does not appear at all after the lens cap has been put on and the Shutter Button pressed, it may be assumed that something is wrong with the Red Mark itself. In this case, the following adjustments should be made:

1. If the movement of Moving Guide C4153 is bad, replace Washer W 2132 x 2, which is under Retaining Washer YS 1131 x 2 holding C4153, with one of less thickness.

See Repair Manual p.8.

2. Adjust the length of EE-Signal C4359 after loosening Screw S1-140157 x 2 securing C4359.

See Repair Manual p.2.


* * *

EXPOSURE METER

When the Shutter is not released even after the Shutter Button is pressed down for automatic photography with the shutter speed set at 1/125 or 1/250 in the bright sunlight, it may be assumed that the Exposure Meter has developed some kind of trouble. In this case, the following checks and adjustments should be made.

1. Check to see whether the meter needle is in the position shown in the figure with the lens cap on. Then take the lens cap off and see if the needle moves when the lens is pointed towards the light.

See Repair Manual p.2.

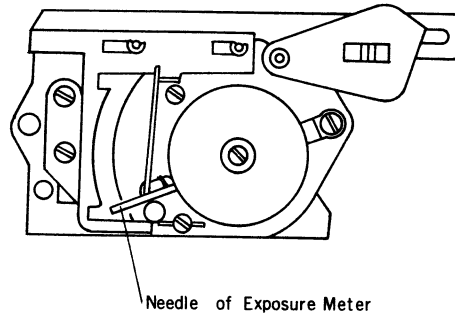

2. If the needle does not move, the connection between the photoelectric cell and the cord should be checked in the following order:
 - 1) Window C4258 and Lattice Window Frame C9338 are removed by disconnecting Collar C4261 with Tool T06A-C4261.
 - 2) Check whether the cord is firmly connected to Photoelectric Cell ES4003. Make sure that no naked wire is touching the inner side of ES4003.
 - 3) Before tightening C4261, press down on ES4003 with the hand and check to see if the needle moves when light is focussed on it.
3. If the above conditions are found to be normal but still the needle does not move, Exposure Meter CU066 should be replaced.

* * *

FILM COUNTER

If for some reason the Winding Mechanism becomes faulty and the Film Counter does not move forward, adjustments should be made in the following manner:

1. Check the Spring for Film Counter CU067 and reattach if it has come loose.

See Repair Manual p.2.

2. If the movement of the Stop Claw for CU067 is small, the Stop Claw will not mesh with the Ratchet Gear Teeth and this will prevent the Film Counter from moving forward. In this case, the tip of the Stop Claw should be bent.

See Repair Manual p.2.

When the Back Cover is opened the Film Counter will automatically return to "2", but if for some reason the Film Counter fails to return when the Back Cover is opened, adjustments should be made in the following manner:


Check to see if the Resetting Lever of Film Counter CU067 is not touching the camera body. If it is found to be touching the camera body, adjust by bending the Resetting Lever.

See Repair Manual p.2.

* * *

WINDING MECHANISM

When the camera shows the conditions described below, it may be assumed that the Winding Mechanism has become defective and so the following adjustments should be made:

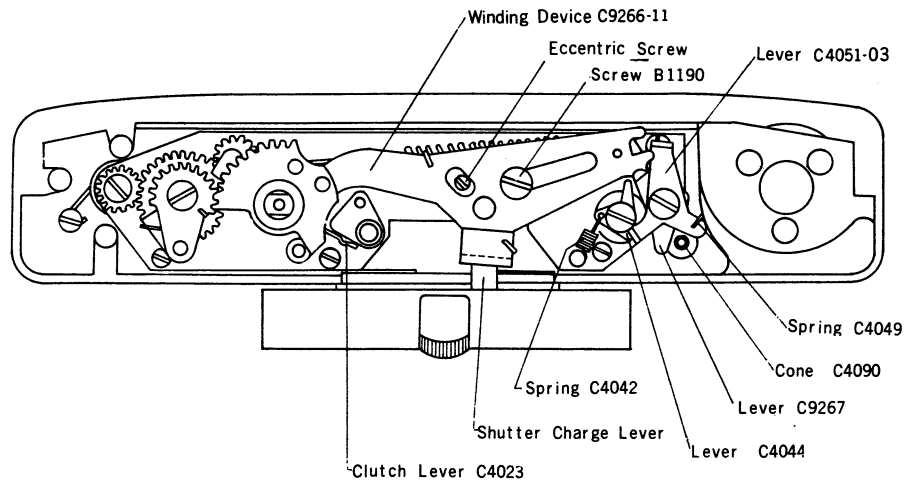

When the shutter is not charged even after the Trigger Lever is wound, the following adjustments should be made:

Loosen Screw B1190, float Winding Device C9266-11 and set the Shutter with a pair of tweezers.

Then adjust the amount of charge by turning the Eccentric Screw of C9266-11.

See Repair Manual p.5.

When the Trigger Lever does not move, the following checks and adjustments should be made:

1. Check to see whether the Screw for the Winding Device is loose.
2. Check to see whether Spring C4049 is out of place. If so, reattach.

See Repair Manual p.5.

3. If Cone C4090 is caught between Lever C9267 and Lever C4051-03, loosen Screw S1777 and adjust C4090 by turning it to the right.

See Repair Manual pp.2&5.

4. If Lever C4051-03 does not disengage itself from Lever C4044 when the shutter button is pressed down because Cone C4090 does not go down enough, Screw S1777 should be loosened and adjustments made by turning C4090 to the left.

See Repair Manual pp.2&5.

When the Trigger Lever runs idle or when it winds many times before the shutter button is pressed down, the following checks and adjustments should be made:

1. Check to see whether Spring C4042 is out of place. If so, reattach.

See Repair Manual p.5.

2. If the spindle of Lever C4044 is bent, replace Base Plate C9262-09.

See Repair Manual p.5.

3. If the gap between Lever C4044 and Winding Device C9266-11 has become too wide because Lever C4044 has become worn out, adjustments should be made by turning the Hexagonal Eccentric Nut for Base Plate C9262-09 with Spanner-2 for C4041. If this is insufficient, C4044 should be replaced.

See Repair Manual p. 5

When the Shutter Button cannot be pressed down, it should be adjusted in the following manner:

Check to see whether Spring C4049 attached to Lever C4051-03 is out of place and if so, reattach.

See Repair Manual p. 5

When the Shutter Button does not return to its original position after it has been pressed down, the following adjustments should be made:

Check to see whether Cone C4090 is caught between Lever C9267 and Lever C4051-03. If so, loosen Screw S1777 and make adjustments by turning C4090 to the right.

See Repair Manual pp. 2 & 5.

When the film cannot be rewound or when the film catches, the following adjustments should be made:

Open the Back Cover and set the Rewind Clutch Lever to R. Then check to see whether it will turn both to the left and right by rotating the sprocket manually. If it does not turn, see whether Clutch Lever C4023 is bent, or whether Clutch Shaft C4056 is held down properly by C4023. Then adjust by bending C4023, or replace C4023.

See Repair Manual p. 5.

* * *

INCORRECT FOCUS

When the Back Focus becomes out of focus due to some kind of shock, the following adjustments should be made with the use of 200mm T-Type Collimator:

First, loosen only three of the S3787x4 Screws holding Focusing Ring C4256, determine the proper position by turning C4256, and when the proper position is found, loosen the remaining one S3787 Screw.

Lastly, set the ∞ of C4256 to the camera's Range-Viewfinder Distance Scale and again tighten all four S3787x4 Screws.

See Repair Manual p.6

When the double-image of the Range-Viewfinder does not align due to some kind of shock, adjustments should be made after referring to the paragraph on "When the Range-Viewfinder's Double-Image does not align."

* * *

CANON REPAIR GUIDE

SHUTTER for CANONET

(REF.NO. 1-30208)

CANON CAMERA CO.,INC.

TOKYO, JAPAN

CONTENTS

Disassembling Method

Barrel	4
Shutter Blades	5
Diaphragm Blades	6
Diaphragm Ring	7


Adjusting Method

Release Lever	8
M-Governor	10
Shutter Blades	11
Diaphragm Blades	14
Main Cocking Lever	15

Trouble, Cause & Remedy

It cannot be released	18
Heavy Release	18
It can not be charged	19
Charge is heavy	20
Diaphragm blades do not return	20
Diaphragm blades do not return smoothly	21
B Full Open	21
B skips	22
One Second Open	22
Slow Skips	22
It cannot be released by self-timer	23

BARREL DISASSEMBLING

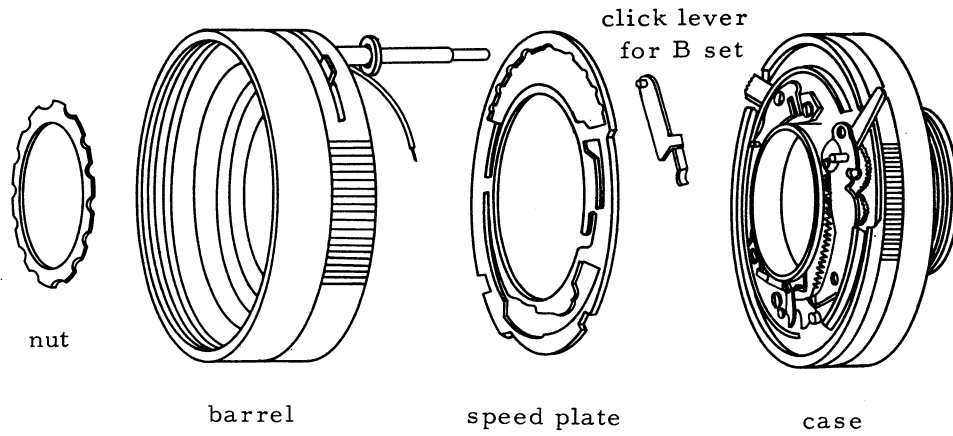

Works

Taking out Barrel

Taking out Speed Plate

Taking out Click Lever
for B Set

Specifications

Fit the nut to the screw.

Taking out nut.


n.b. Use a pincers or pin face screwdriver for the purpose.

Taking out barrel.

Taking out speed plate.

Taking out Click Lever for B Set.

SHUTTER BLADES DISASSEMBLING

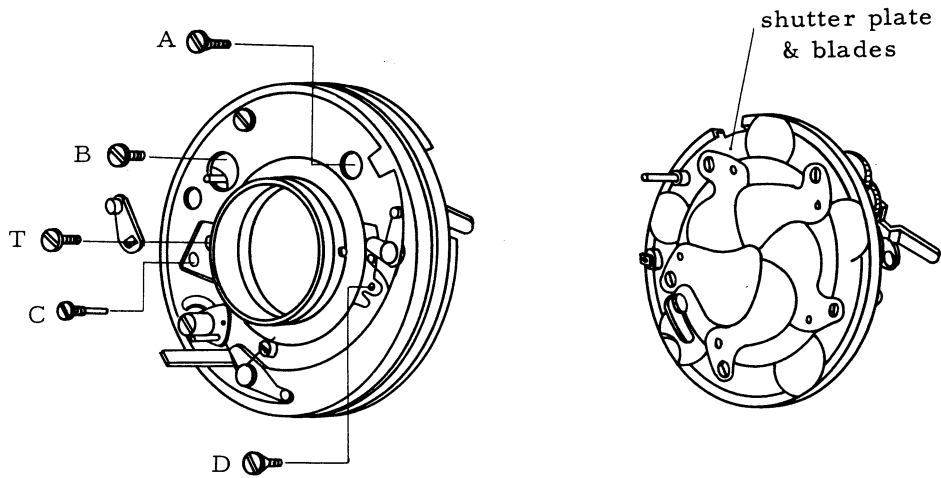

Works

Specifications

Taking out Set Lever

Taking out screw.
T

Taking out set lever.

n.b. The set lever should be taken out pushing the top end up with screwdriver.


Taking out Plate

Taking out screw x 4.
A,B,C,D

Taking out plate.

It can be taken out in the state of shutter blades being assembled to the plate.

DIAPHRAGM BLADES DISASSEMBLING

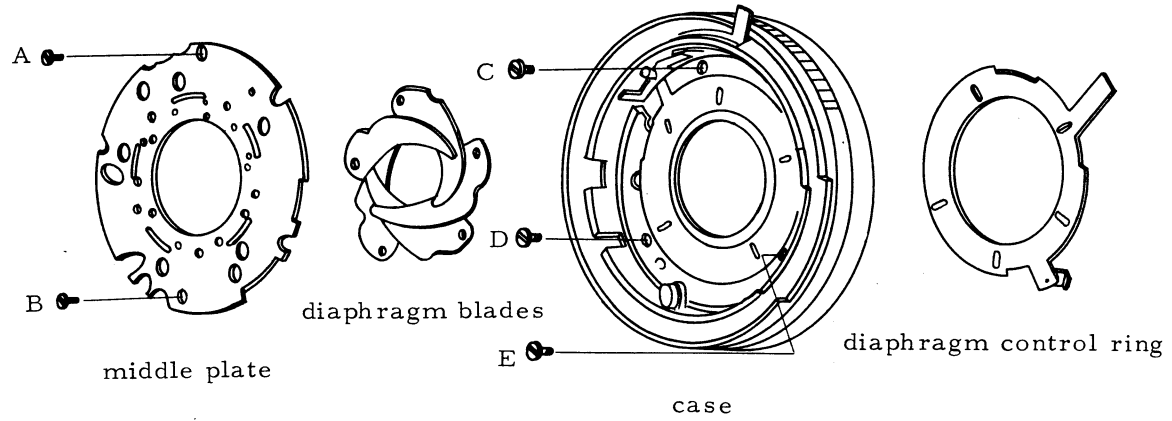

Works

Specifications

Taking out Diaphragm

Taking out screw x 2
A, B

Taking out middle plate


Taking out diaphragm blades (5 blades).

Taking out Diaphragm
Control Ring

Taking out screw x 3
C, D, E

Taking out Diaphragm Control
Ring

DIAPHRAGM RING DISASSEMBLING

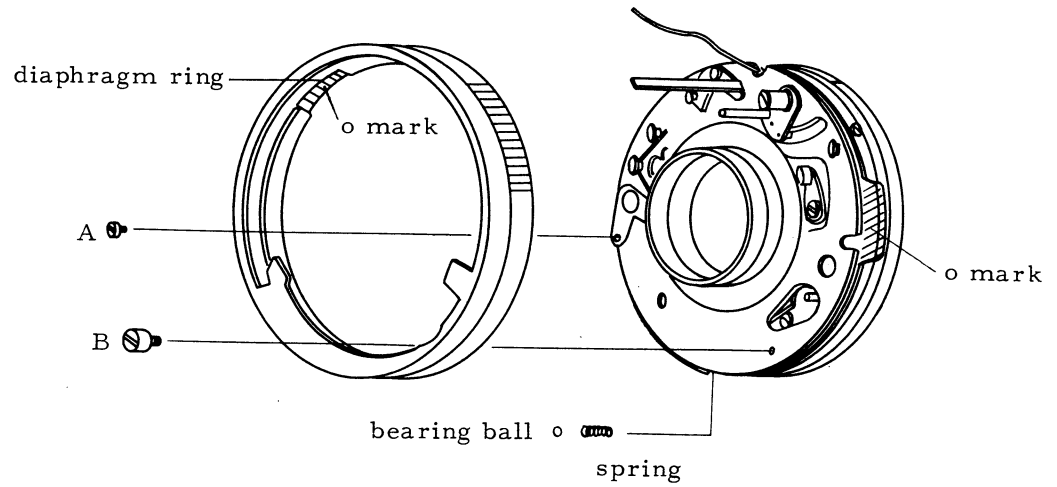

Works

Specifications

Taking out Screw x 2

Taking out screw A and B.

Letting Diaphragm
Ring Revolve

Revolve the diaphragm ring direction of counter-clockwise to the shutter body about the position specified in the following diagram.



approx. 5mm

Taking out Diaphragm
Ring

The diaphragm ring can be taken out at the position where two o marks come together.

n.b. Pay attention lest bearing ball and spring should be lost, bearing ball plays an role of auto click.

RELEASE LEVER ADJUSTMENT

How to Disassemble

1 Taking out M-Governor Driver

- 1) Taking out spring
- 2) Taking out nut

Take out the nut holding governor driver with your fingers from the top as the position of adjusting tap should not get out of position.



nut



governor driver



adjusting tap



release lever

3) Marking

Put a mark to the governor drive and adjusting tap as the assembling position should be easily identified.

4) Taking out M-Governor Driver

5) Taking out adjusting tap

2 Taking out release lever

- 1) Taking out spring
- 2) Taking out release lever

Inspection

- 1 Insertion of shaft must be smooth.
- 2 There should not be any scratch and roughness on the surface where release hook touches.



release lever shaft

How to Fix

- 1 Put MOG-3 to the release lever shaft.
- 2 Put MOG-3 to the release lever hook part.
- 3 Fix the release lever and spring.
- 4 Fix the adjusting tap.
- 5 Fixing governor driver.
- 6 Fastening nut

Putting the mark of governor driver and adjusting tap together and fasten holding governor driver with your fingers lest the position of tap should move.

7 Check gearing of release

Refer to the item how to replace and adjust tension.

8 Fixing B lever.

M-GOVERNOR ADJUSTMENT


How to Disassemble

- 1 Taking out B lever.
- 2 Taking out M-Governor Driver.

Refer to the item how to replace and adjust release.

- 3 Taking out segment gear.

- 1) Screw
- 2) Segment gear

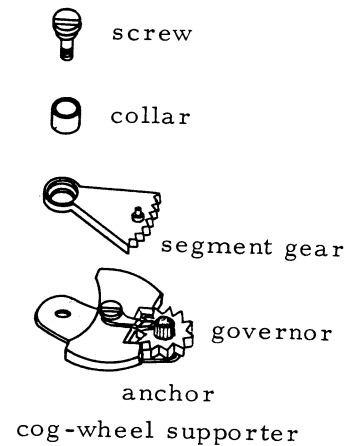


Inspection

- 1 Space between cog-wheel supporter and anchor must be less than 0.15mm.
- 2 Operation of anchor and cog-wheel must be smooth.

How to Fix

- 1 Fixing governor

- 1) Put the governor on plate.
- 2) Segment gear collar
- 3) Segment gear
- 4) Screw
- 5) When holding the dowell and letting it move to right and left, it should operate smooth without any pulling.

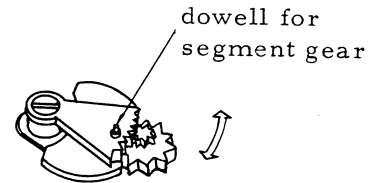

Gear space between segment gear and cog-wheel can be adjusted to some extent.

- 2 Fixing governor driver

Refer to the item how to replace and adjust release lever.

- 3 Check release gearings.


Refer to the item how to replace and adjust tension.

- 4 Fixing B lever


SHUTTER BLADES ADJUSTMENT

How to Disassemble


- 1 Take out the spring from spring hanger.

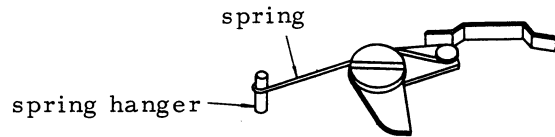

- 2 Take out tension lever in the state that shutter is depressed.
- 3 Take out four screws which fix plate.

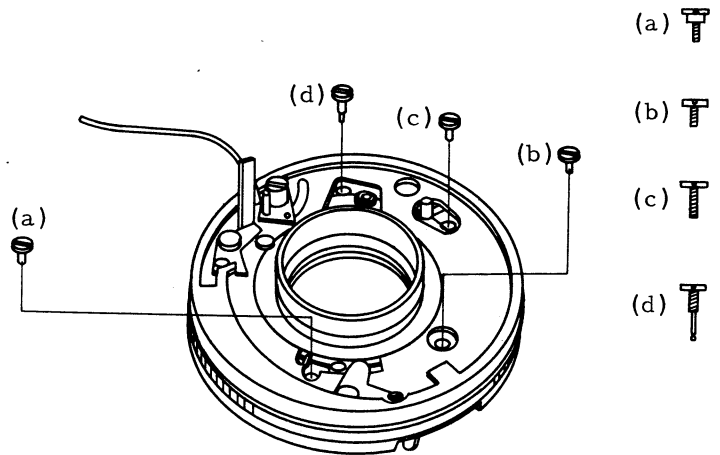

- 4 Set dowell for M-Governor Driver at the point a little farther near to X than M position.

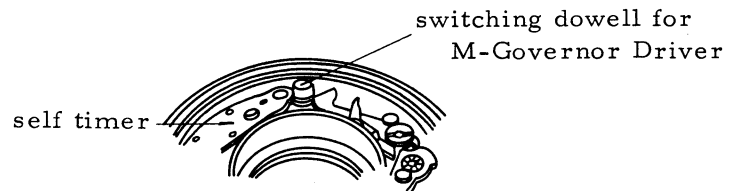


Scratched blades, dirt, oily, fingerprints

Inspection

- 1 Plate

- 1) Put CU087 Rear Lens to the plate.

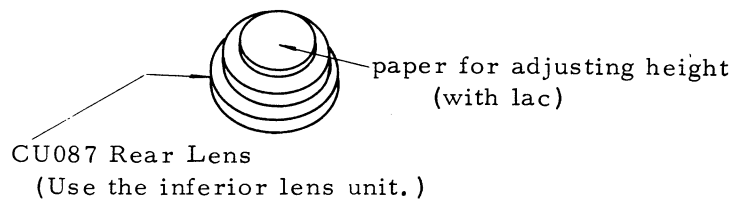

2) Assembling sub shutter blade


Assemble as shown in the diagram (a)-(d).

3) Assembling shutter blades

Assemble as (a) - (e). clockwise direction.

Assemble the last sub blade on the blade (e).


n.b. Pay attention not to put any fingerprints on it.

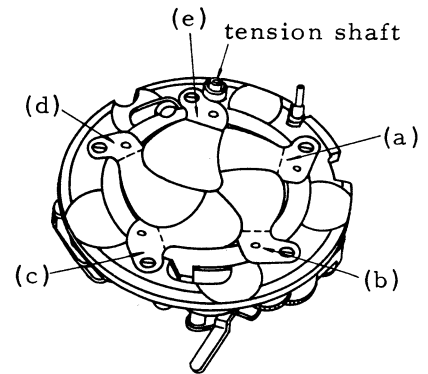

2 Case

Check setting position of M-Governor Driver switching dowell. The position should be a little farther near to X than M position.

3 Assembling plate and case

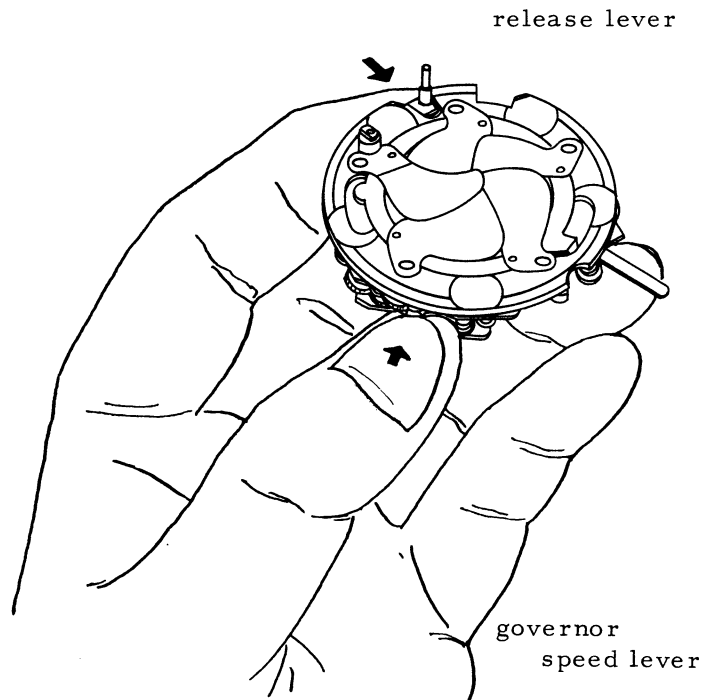

- 1) Hold the plate with your left hand as shown in the diagram, and press the release lever in with your forefinger. In this stage pay attention if it is inclined, the assembled blades come off.
- 2) Hold it in the direction which the case is fitted to the plate, and fit the release lever pin and long hole for the pin.

- 3) Placing the case and the plate in parallel, assemble in until the height of release pin's top end becomes same level as the oblique lines portion of the diagram.

work (a) and (b)



- 4) Assemble synchro side tightly

work (c)


- 5) Being synchro side closely fitted to

work (d)

- 6) Assemble the other side (synchro wire side.)

In this stage assemble after M-Governor Driver is properly set.

work (e)

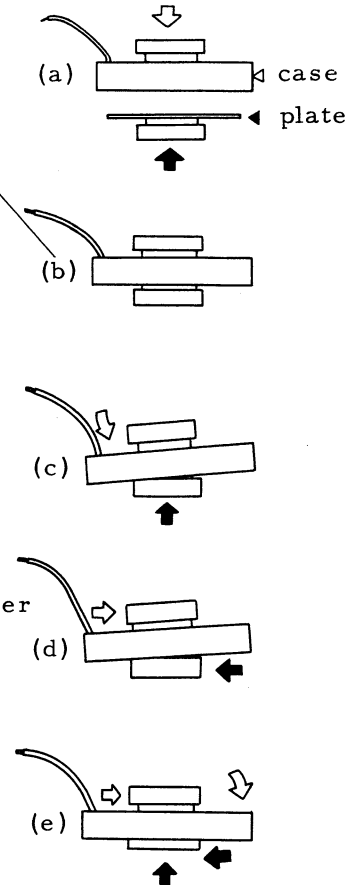

- 4 Fasten four pieces of screw for the plate.

Refer to the item how to disassemble (3) of this section.


- 5 Hanging spring for synchro contact.

Refer to the item how to disassemble (1) of this section.

- 6 Fixing tension lever

Put a little lac to screw hole of tension shaft.

- n.b. 1 Put correctly the pieces of washer which have been inserted.
 2 Pay attention that lac should not be put to the operation portion.



DIAPHRAGM BLADES ADJUSTMENT


How to Disassemble

- 1 Taking out plate.
Refer to the item how to replace and adjust shutter blades.
- 2 Taking out blades retaining plate.
 - 1) Set the diaphragm regulating ring at Auto.
 - 2) Taking out two screws for blades retaining plate.
 - 3) Taking out the blades retaining plate.

Inspection

Scratch, dirt, oil and fingerprints on the blades.

- 1 Assemble the blades as the direction shown in the diagram in order of the counter clockwise.




blade retaining plate

- 2 Put the blades in order within the case circle.

- 3 Fix the blade retaining plate.

- 4 Fasten the screw for the plate.

- 5 Check the operation of blades. They should move smoothly without any pulling.

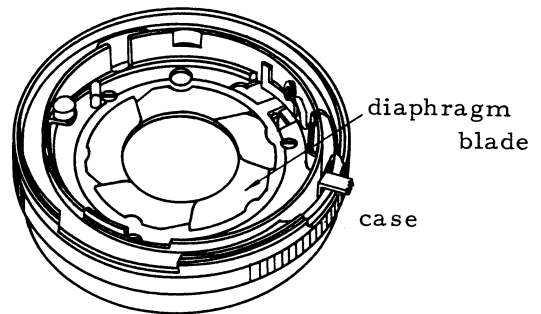

- 6 Fixing plate.


Refer to the item how to replace and adjust shutter blades.

MAIN COCKING LEVER ADJUSTMENT

How to Disassemble


1 Taking out slow governor

- 1) Set the cocking lever.
- 2) Take out three screws for the governor.
- 3) Take out the governor.
- 4) Take out washers

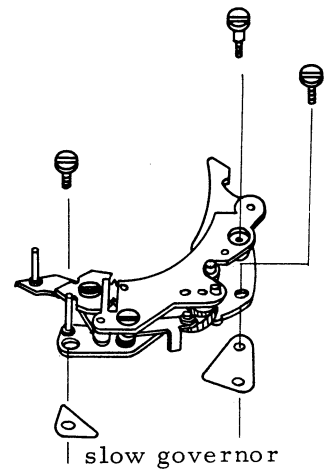

2 Taking out the main cocking lever

- 1) Take out tension spring.



Take out the spring to the arrow direction using a screwdriver.

- 2) Pull out the main cocking lever.


n.b. Pay attention as the synchro contact should not be bent when it pulls out.

Inspection

- 1 The move of piston should be smooth.
- 2 Every surface should be smooth.

How to Fix

- 1 Put MOG-3 on the tension.




Put a little MOG-3 on the brim.

- 2 Fix the main cocking lever

Push in the main cocking lever on the way of the extent that spring hang tool can be inserted.

- 3 Hang the spring hang tool to rise up portion of tension spring and hang it to portion (a) of the main cocking lever pulling the spring.

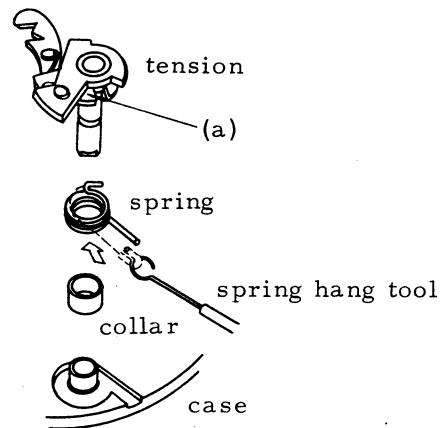

- 4 Press the main cocking lever completely down.

If it is hard, insert it in pushing the tension spring to the arrow direction with pincers.


n.b. 1 Pay attention as the spring should not be weakened.

2 Pay attention to the bending of contact.

- 5 Fix rear cocking lever.


Put a little lac to screw hole of main cocking lever shaft.

n.b. Pay attention as lac should absolutely not be put to the operation portion.



- 6 Put MOG-3 to the main cocking lever

Put a little MOG-3 to the (a), (b) portion in the diagram.



7 Gearing of release lever and main cocking lever

1) Set the cocking lever.

2) Letting the piston operate to the arrow direction and check if it touches to semicircle.


3) If it touches, adjust bending the release hook to the arrow direction.

4) Timing of piston, setting of semicircle, tension, and release hook

- i As a rule the release and piston should be charged simultaneously.
- ii It may have some divergence, however, it should not extremely be different, because it causes that synchro contacts when the contact moves and sets.
- iii In that case the piston should charge in the first place.

5) Room

It requires some room space after charge.

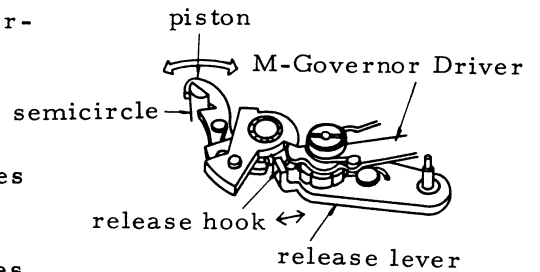

TROUBLE, CAUSE & REMEDY

IT CANNOT BE RELEASED.

- | | | | |
|---|---------------------------------------|----------|---|
| 1 | The blades do not move. | 1-1 | Oil
Clean. |
| | | 1-2 | Metal collapse
Replacement
Refer to the item of shutter blades adjustment. |
| 2 | The main cocking lever does not move. | 2-1 | Creaking main cocking lever shaft
Replacement
Refer to the item of main cocking lever adjustment. |
| | | 2-2 | Rusting main cocking lever
Replacement
the same as the above |
| 3 | Inferior Piston Move | 3-1 | Coming off piston spring
Correct the hanging.
Check the spring movement. |
| | | 3-2 | Adjusting aberration
Refer to the item of main cocking lever adjustment. |
| | | 3-3 | The piston does not move.
Replacement
the same as the above |
| 4 | An obstacle be caught in. | Abridged | |

HEAVY RELEASE

- | | | | |
|---|--|-----|---|
| 1 | Roughness of Release Hook and Main Cocking Lever | 1-1 | Lack of oil on the touching surface.
Lubricate MOG-3 on the surface. |
| | | 1-2 | Roughness of the touching surface
Replacement
Refer to the item of release lever and main cocking lever adjustment. |
| 2 | Inferior Operation of | 2-1 | Bent release lever
Adjustment
Check the gearing of rear release and tension. |

- | | | |
|---------------------------------|-----|---|
| | 2-2 | Rusted release lever
Replacement
Refer to the item of release lever adjustment. |
| 3 Inferior Release Ring | 3-1 | Rough surface of release pin
Polish using oil stone and after that put a little liquid molybdenum. |
| | 3-2 | Rough surface where touches to the helicoid
The disposal is same as mentioned in 3-1. |
| | 3-3 | Bent release ring
Rectifying or replacement |
| IT CANNOT BE CHARGED. | | |
| 1 Coming off Main Cocking Lever | 1-1 | Loosened screw
Refer to the item of main cocking lever adjustment. |
| | 1-2 | So much room space in the tension lever long hole
the same as the above |
| 2 Inferior Piston Move | 2-1 | The piston does not move.
Refer to the item of main cocking lever adjustment. |
| | 2-2 | Coming off piston spring
Hang it up and check the effect of spring. |
| 3 Inferior Release Lever Move | 3-1 | Bent release lever
After adjustment, check the gearing of release and main cocking lever.
Refer to the item of main cocking lever adjustment. |
| | 3-2 | Inferior release spring
Replace it and refer to the item of release, lever adjustment. |
| | 3-3 | Rusted release lever
Replace and the rest is same as the above. |

CHARGE IS HEAVY.

- | | | | |
|---|--|-----|---|
| 1 | Rough Surface of Main Cocking Lever with Release Lever | 1-1 | Lack of Lubrication
Lubricate MOG-3 to the touching surface. |
| | | 1-2 | Rough surface
Replace main cocking lever and release lever.
Refer to the item of main cocking lever and release lever adjustment. |
| 2 | Creaking Main Cocking Lever Shaft | 2-1 | Lack of Lubrication
Lubricate MOG-3 to the tension shaft.
Refer to the item of main cocking lever adjustment. |
| | | 2-2 | Rough tension shaft
Replacement
the same as the above |
| | | 2-3 | Rusted tension shaft
Replacement
the same as the above |
| 3 | Rear cocking lever touches to rear cover plate . | 3-1 | Bent rear cocking lever
Replacement
Refer to the item of main cocking lever adjustment. |
| 4 | Inferior M Governor | 4-1 | Cog-wheel has been detached and it touches to connection plate.
Adjustment
Refer to the item of M Governor adjustment. |
| | | 4-2 | Loosened segment gear screw
Adjustment
the same as the above |
| | | 4-3 | Lack of lubrication on cog-wheel
Lubrication |

DIAPHRAGM BLADES DO NOT RETURN.

- | | | |
|---|--------------|--|
| 1 | Oil | Cleaning |
| 2 | Stuck Blades | 2-1 |
| | | Inferior stopper position
After adjustment: 1 Stop down fully up to f 16 by manual lever. |

- 2 At this time check if the auto lever moves smoothly without any catching.

- 2-2 Warping
Replacement
Refer to the item of diaphragm blades adjustment.
- 2-3 Scratch
Replacement
the same as the above

- 3 Transformation by Shock Refer to the item of diaphragm blades adjustment.
- 4 Detached Spring Hang it up.

DIAPHRAGM BLADES DO NOT RETURN SMOOTHLY.

- 1 Oil
- 2 Inferior Operation of Auto Diaphragm Lever
 - 2-1 Loosened screw
abridged
 - 2-2 It touches to the case because of bending.
Replace the auto lever.
 - 2-3 Rusted
the same as the above
- 3 Inferior Operation of Manual Diaphragm Lever
 - 3-1 Lubricate and clean.
 - 3-2 Replace in case of inferior revetting.
 - 3-3 Replace in case of rusting.

B FULL OPEN

- 1 Inferior Governor Refer to slow skipping.
- 2 Connection of B Lever and Main Cocking Lever
 - 2-1 Stuck
Replace B lever.
 - 2-2 Rough surface
Replace B lever and main cocking lever.
Refer to the item of main cocking lever.
- 3 Creaking Sector Ring Most of this trouble being caused by shock.

	Replacement Refer to the item of shutter blades adjustment.
4 An obstacle has been stuck.	abridged
B SKIPS.	
1 Inferior Operation of B Lever	Replacement
2 Warped Cam Plate	Rectify.
ONE SECOND OPEN	
1 Inferior Governor	1-1 Loosened governor set screw abridged 1-2 Lack of lubrication on anchor Lubricate. 1-3 Aberrant adjustment for anchor Adjust. 1-4 Connection plate is too loose. Replace governor. 1-5 There is an obstacle in gear Rinse by benzine and then lubricate.
2 Creaking Sector Ring	Most of this trouble being caused by shock.
3 An obstacle has been stuck	abridged
SLOW SKIPS.	
1 Inferior Governor	1-1 Operation of anchor clutch lever Replace governor. 1-2 Put in anchor clutch lever pin. After being adjusted the bending of clutch lever, and then adjust the clutch space. 1-3 Anchor clutch lever pin is too high. the same as the item 1-2 1-4 Inferior operation of speed change lever Replace governor.

1-5 Loosened revetting of pinion gear
Replace governor.

1-6 Creaking of connection plate

IT CANNOT BE RELEASE
SELF-TIMER.

1 Inferior Operation of
Clutch Lever

1-1 Bent clutch lever
Rectify bending.

1-2 Detached clutch lever and sector ring's dowell
Adjustment

2 Bent Safety Lever

Hold the end of safety lever with pincers and rectify
the bent base by pushing in a screwdriver.

3 Self gear gets dirty.

Rinse by benzine and they lubricate.

4 An obstacle has been
stuck.

abridged

CANON SERVICE TOOL MANUAL

CANONET

(REFERENCE NO. C-30206)

CANON CAMERA COMPANY, INC.

TOKYO, JAPAN

CONTENTS

HOW TO USE-----

THE LENS PROJECTION TEST UNIT

THE 200mm T TYPE COLLIMATOR

THE LENS SHUTTER TESTER

THE INSPECTION DEVICE FOR CANON METER

THE LOCATING JIG FOR THE EE-DRIVING SHAFT

THE SPANNER-2 FOR C4041

LIST OF SPECIAL SCREWDRIVERS FOR CANONET

HOW TO USE THE LENS PROJECTION TEST UNIT

1. NAME OF THE TOOL

Lens Projection Test Unit

2. PURPOSE

When the Canonet is overhauled, for example, by disjoining the front panel with objective from the body or by disassembling the front panel with objective lens, it is necessary to adjust and reassemble them, while testing, in the following method of test:

(a) Correct adjustment shall be made of the focal plane of the camera in the same method as adopted for the 200mm T Type Collimator.

(b) Test and adjustment shall be conducted, through the use of the Lens Projection Test Unit, as to whether the lens is correctly fitted in the camera body.

This formula may be applied also to the checking of the customers' claims regarding the quality of the lens.

It is necessary, however, to prevent the participation in the test work by those customers who have little technical knowledge; otherwise it may cause an unnecessary conflict with them.

3. TO BE USED FOR

Canonet

4. COMPOSITION

- (1) The Lens Projection Test Unit 1

The Lens Projection Test Unit refers to the equipment for use in the test of the Canon Lens and Canon Cine Lens, which has already been supplied, with the exception of its attachment; so the Test Unit is not supplied with the recently-introduced Lens Projection Test Attachment-2.

- (2) The Lens Projection Test Attachment-2 1

- (3) Screen 1

This projection test screen is not supplied with the Lens Projection Test Attachment-2. White mat art paper pasted up on a wall, a white wall as such, or a suitable cine screen may be used as the projection test screen.

Its standard size shall be about 75cm by about 110cm, but it is desirable for its surface to be even.

This is because it is difficult to discern any image on a screen the surface of which is rough.

5. OUTWARD APPEARANCE

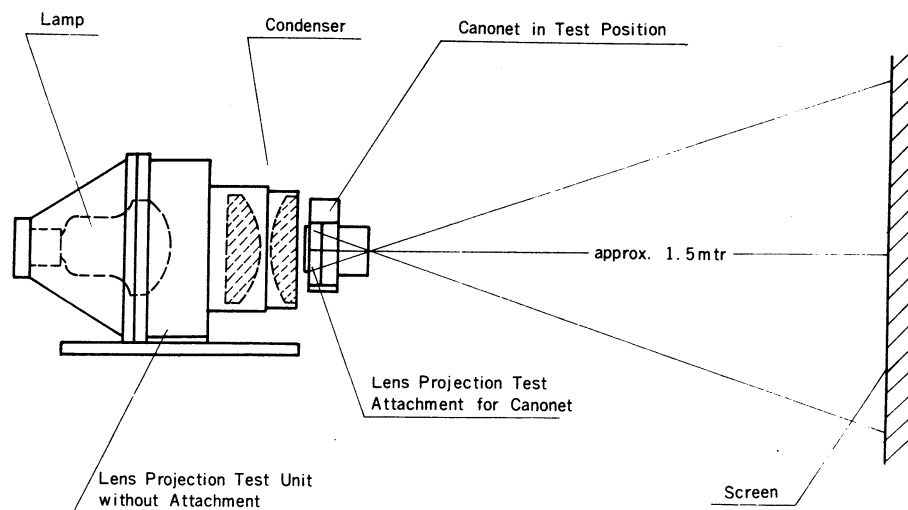


Fig. 1 The method of the Lens Projection Test for Canonet

6. HOW TO USE

- 6.1. The Lens Projection Test Unit without attachment shall be placed on a desk the surface of which is even, a screen being set right ahead of the desk. In this case, the Test Unit shall be made to face just toward the screen with a space of about 1.5 m left. The screen shall be about 75cm x about 110cm in size.
- 6.2. The lens shall be opened to F1.9 with the shutter kept to Time exposure.
- 6.3. The Lens Projection Test Attachment-2 shall be fixed in the back of the camera body by opening its back cover so as to be stuck close to the rail. In this case, the center of the Test Attachment shall be trained right on the optical center of the lens. In handling the Lens Projection Attachment, you must keep your fingers off the plateglass, especially the test chart.
- 6.4. The Lens Projection Test Unit shall be switched on.
- 6.5. The camera body shall be maintained so that the distribution of light intensity through the camera in the test position can be equivalent. In this case, a suitable holder may be used.
- 6.6. The helicoid of the lens shall be adjusted so that the test chart's image on the screen can be discerned most clearly.
- 6.7. If the test chart is imaged equally on the screen both vertically and horizontally, then it may safely be said that the lens is fixed properly to the camera body.

It is necessary, however, to note that tolerance, however slight it may be, is considered in proportion to the ratio of photographing. Even if at first sight the lens is fitted in the camera body in the wrong way, sometimes it need not be taken seriously if the ratio of photographing is taken into consideration in examining the image on the screen.

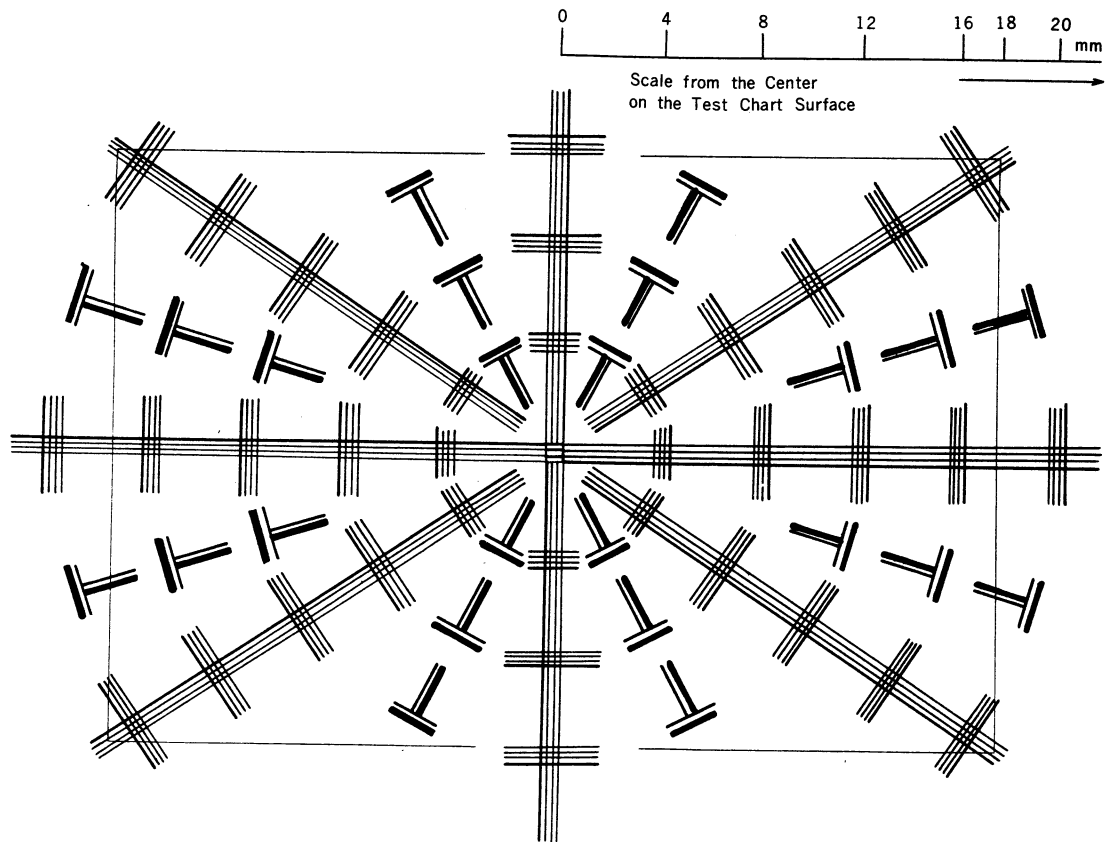


Fig. 2 The Diagram of the Test Chart

HOW TO USE THE 200mm T TYPE COLLIMATOR

1. NAME OF THE TOOL

200mm T Type Collimator

2. PURPOSE

In repairing the Canonet, when the front panel with objective lens has been removed from the body or when front panel with objective lens has been further dismantled, a 200mm T Type Collimator must be used to adjust the helicoid so that the focal plane will be accurately maintained.

3. TO BE USED FOR

Canonet

4. COMPOSITION

- (1) 200mm T Type Collimator (collimator, pole, stand)
- (2) Mirror

5. OUTWARD APPEARANCE

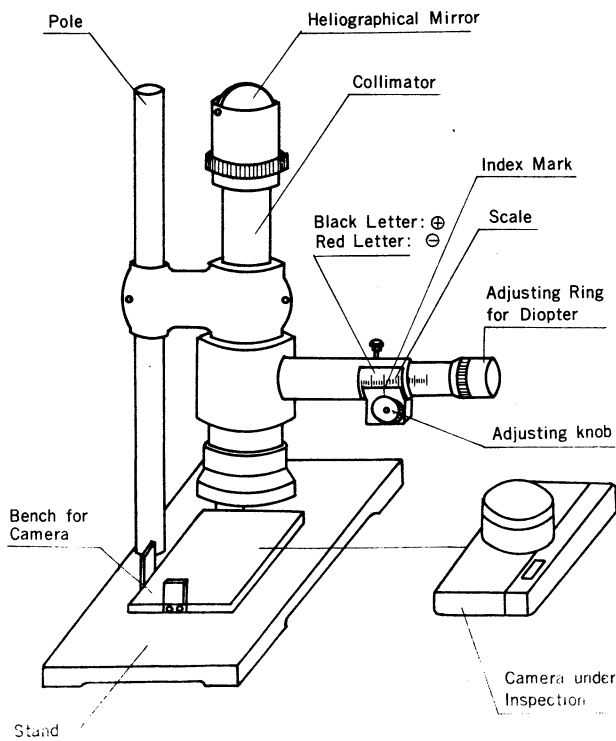


Fig. 1 The Appearance of the 200mm T Type Collimator

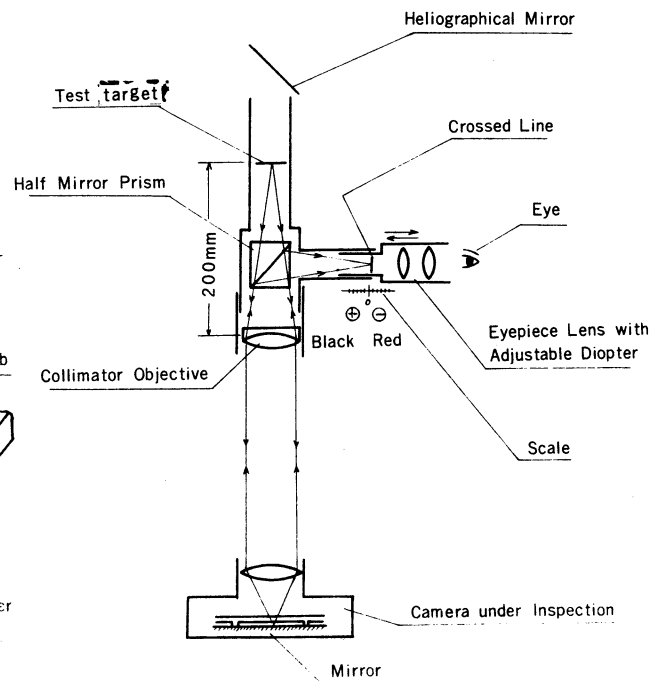


Fig. 2 The Illustration of the optical construction of the 200mm T Type Collimator

6. HOW TO USE

- 6.1. Place the stand of the 200mm T Type Collimator on a flat table, set up the pole and attach the collimator to the pole.
- 6.2. Place the mirror on the bench of the stand. Next, turn the heliographical mirror and adjust so that the field of vision is brightest. It is most desirable to use natural light.
- 6.3. Turn the adjusting ring for the diopter and adjust so that the crossed line within the field of vision is clearest.
- 6.4. Turn the adjusting knob directly underneath the scale and find the position in which the test target picture can be seen at its clearest.

The test target picture should be clearest when the scale is at the "0" position, but adjustment is not very easy until one gets used to it. Practice is necessary.

- 6.5. After the camera has been assembled, place the mirror against the camera's film plane position and close the back cover. Have the reflecting surface of the mirror facing toward the lens side.
- 6.6. Open the lens aperture to F1.9, set the distance scale to infinity set the shutter speed to T (time) and open the shutter.
- 6.7. Place the camera with the top cover toward you on the bench.
- 6.8. Turn the adjusting knob directly underneath the scale and find the position in which the test target picture can be seen at its clearest.

If this position is between 8 and 10 on the black letter side, you are guaranteed of correct focusing of your camera.

7. HOW TO ADJUST

- 7.1. If this position is not between 8 and 10 on the black letter side, take the following steps:
- 7.2. Adjust the scale of the 200mm T Type Collimator to 9 on the black letter side.
- 7.3. Loosen the lock screw S3787 of the camera's focusing ring C4256.

See Repair Manual p. 6.

- 7.4. Place the camera on the bench. While looking at the field of vision, place your fingers on the focusing knob and turn the helicoid slowly, either clockwise or counter clockwise.

Turn the helicoid until you find the position in which the test target picture is clearest.

- 7.5. Make the infinity mark ∞ of the focusing ring C4256 coincide with the distance scale index and then tighten the lock screw S 3787.

See Repair Manual p. 6.

- 7.6. Repeat the inspection outlined in 6. 8. .

HOW TO USE THE LENS SHUTTER TESTER

1. NAME OF THE TOOL

Lens Shutter Tester

2. PURPOSE

The Lens Shutter Tester is used to test the performance of the shutter of the camera with the lens shutter.


3. TO BE USED FOR

Canonet

4. COMPOSITION

- | | |
|-------------------------------|---|
| (1) The Lens Shutter Tester A | 1 |
| (2) The Lens Shutter Tester B | 1 |
| (3) Cable Cord | 1 |
| (4) Sync-Cord | 1 |
| (5) Lamp 24V 20W | 1 |
| (6) Fuse 1A | 1 |

5. OUTWARD APPEARANCE

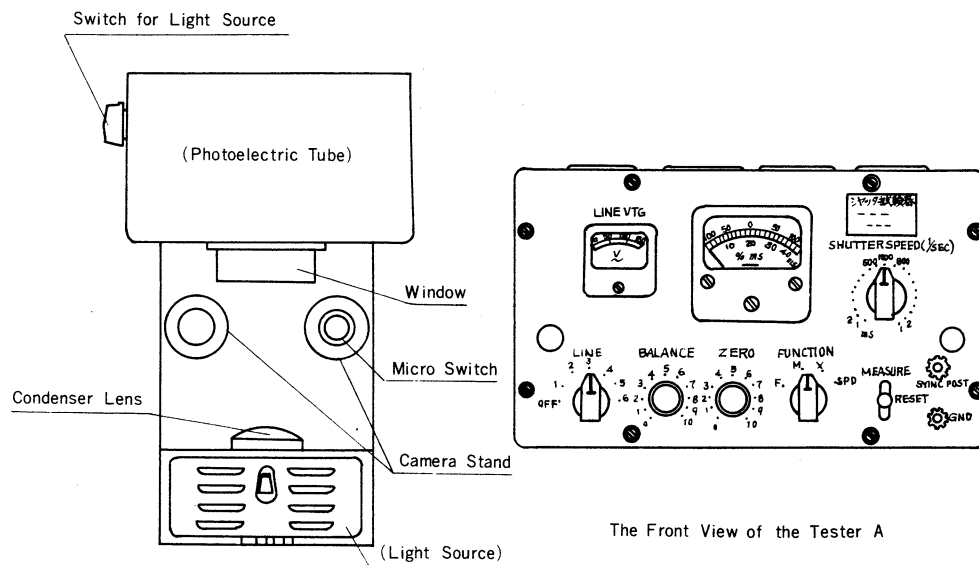

The Top of the Tester B

The Front View of the Tester A

The Appearance of the Lens Shutter Testers


6. HOW TO USE

- Place the Lens Shutter Testers A & B on a flat table. Be careful not to let the intense light rays fall on the photoelectric tube of the Tester B.
- Connect the Testers A and B with the Cable Cord.
- Connect the Tester A with source of electricity.
- Turn the LINE dial of the Tester A to the right and adjust the needle of the LINE VTG meter so that it gets into the red part.
- Wait for a few minutes until the Testers become settled.
- Put the MEASURE lever of the Tester A on RESET and adjust the needle of the meter so that it points to -100.

by turning the ZERO dial.

Then, put the lever on MEASURE and, if the needle gets out of -100 , adjust it by turning the BALANCE dial.

- 6.7. Adjust the height of the camera stand of the Tester B so that the center of the shutter of the camera and that of the window of the Tester B come on the same point.

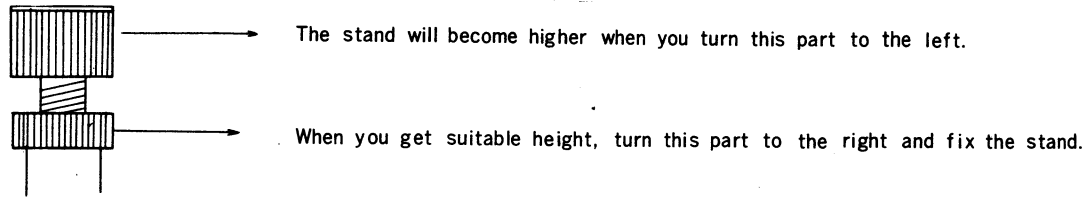

- 6.8. Set the LIGHT dial at 1.

- 6.9. How to Measure the Shutter Speed.

- 6.9.1. Set the FUNCTION dial at SPD.

- 6.9.2. Set the MEASURE lever at MEASURE.

- 6.9.3. Set the SHUTTER SPEED dial at 1.

- 6.9.4. Set the aperture ring of the camera at open (F1.9) and the shutter speed ring at 1.


(The SHUTTER SPEED of the Tester A and the shutter speed of the camera should be always the same.)

- 6.9.5. Open the hinged back of the camera.

- 6.9.6. Place the camera on the camera stand. (The lamp will be lighted.)

- 6.9.7. Press the shutter button.

- 6.9.8. The needle of the meter should indicate the value in the standard range ($-30 \sim +30(\%)$). (Read the value on the upper scale.)



- 6.9.9. The needle of the meter will return to -100 if you return the MEASURE lever to RESET after measuring.

- 6.9.10. Measure various shutter speeds in the same way.

- 6.9.11. If the shutter speed gets out of the standard range, parts must be exchanged as it is difficult to adjust the shutter speed itself.

- 6.10. How to Measure the Time Lag of the X Contact.

- 6.10.1. Set the FUNCTION dial at X.

- 6.10.2. Set the MEASURE lever at MEASURE.

- 6.10.3. Set the SHUTTER SPEED dial at m.s.

- 6.10.4. Connect the red cord of one end of the Sync-Cord with SYNC. POST, the black one with GND and another end with the flash socket of the camera.

- 6.10.5. Set the aperture ring of the camera at full open (F1.9) and the flash setting lever at X. (Any shutter speed will do.)

- 6.10.6. Open the hinged back of the camera.

- 6.10.7. Place the camera on the camera stand.

- 6.10.8. Press the shutter button.


- 6.10.9. The needle of the meter should swing in this condition. The swing of the needle, however, is very small.

(Usually the swing is not more than 0.5 m.s.)

6.10.10. When you want to read the quantity of the swing, measure it following the directions below.

Set the SHUTTER SPEED dial at 1000.

If the needle of the meter swings from -100 to 0 when you press the shutter button, the time lag in this case is 1 m. s.



When the SHUTTER SPEED is at 500, it will become 2 m. s.

6.10.11. If the needle does not swing, measure it following the direction below because the contact is not on the open position but on some stopped down one.

Turn the aperture ring a little from the open position. Turn the aperture ring to the position which is a quarter from 1.9 to 2.8.

The needle of the meter is expected to swing when you measure on this condition.

6.10.12. The needle of the meter will return to -100 if you return the MEASURE lever to RESET after measuring.

6.11. How to Measure the Time Lag of the M Contact.

6.11.1. Set the FUNCTION dial at M.

6.11.2. Set MEASURE lever at MEASURE.

6.11.3. Set the SHUTTER SPEED dial at m. s.

6.11.4. Connect the red cord of one end of the Sync-Cord with SYNC.POST, the black one with GND and another end with the flash socket of the camera.

6.11.5. Set the aperture ring of the camera at full open (1.9) and the flash setting lever at M. (Any shutter speed will do.)


6.11.6. Open the hinged back of the camera.

6.11.7. Place the camera on the camera stand. (The lamp will be lighted.)

6.11.8. Press the shutter button.

6.11.9. The needle of the meter should indicate the value in the standard range (14.5~19m. s.)

(Read the value by the numbers of m. s. of the lower scale of the meter.)



6.11.10. The needle of the meter will return to -100 if you return the MEASURE lever to RESET after measuring.

7. HOW TO TREAT AND PRESERVE

7.1. Give neither vibration nor shock to the Lens Shutter Testers.

7.2. Be careful not to let the intense direct rays fall on the photoelectric tube on the Tester B.

7.3. Usually, test with the aperture full open.

7.4. The LIGHT of the Tester B corresponds to the aperture of the camera approximately as follows.

LIGHT	Aperture
1	open~2.8
2	4~11
3	16

The quantity of the swing of the needle of the meter and the brightness of the light source are not related but the Testers cannot work correctly if the brightness of the light source is too much or if it is insufficient.

- 7.5. If the needle of the meter does not swing or if it does not return after it swings to another end when you measure X or M contact, examine the brightness of the light source and the condition of the contact of that point.
- 7.6. The lamp used as the light source in the Tester B is the one of 24V, 20W (for cars).
- 7.7. As the output of the photoelectric tube changes as time goes on, select the suitable LIGHT of the Tester B, regardless of the correspondence stated on 4.4. when you measure.

HOW TO USE THE INSPECTION DEVICE FOR CANON METER

1. NAME OF THE TOOL

Inspection Device for Canon Meter

2. PURPOSE

The Inspection Device is the apparatus to be used as light source when the performance of Canon Meter and the products which have Canon Meter (e.g. Canonet and Zoom 8) are inspected. It should be connected to power supply, either 100V~125V or 220V~240V, following each direction.

Model 1 100V~125V Projection Lamp 100V 500W

Model 2 220V~240V Projection Lamp 220V 500W


3. TO BE USED FOR

Canonet (besides, this Inspection Device can also inspect the Canon Meter of Canon Meter R, Canon Meter 2, Canon 7, Zoom 8 and so on.)

4. COMPOSITION

- | | |
|---|---|
| (1) The Inspection Device for Canon Meter, Model 1 or Model 2 | 1 |
| (2) Projection Lamp (100V 500W or 220V 500W) | 1 |
| (3) Fuse (Model 1 10A, Model 2 5A) | 1 |

5. OUTWARD APPEARANCE

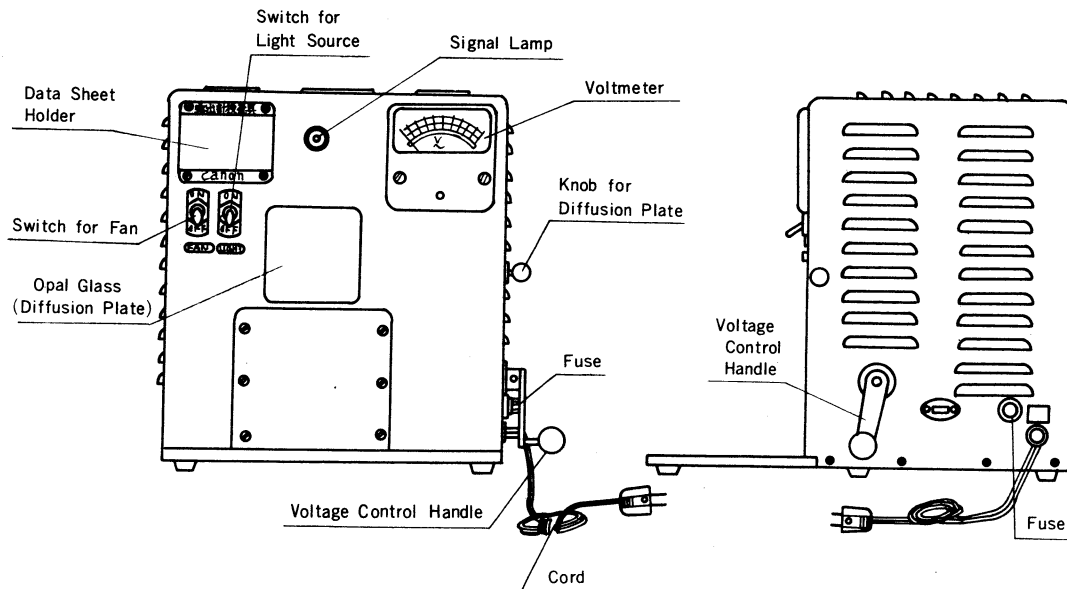

The Appearance of the Inspection Device for Canon Meter

6. HOW TO USE

- 6.1. Place the Inspection Device for Canon Meter on a flat table where no direct rays of the sun fall intensely.
- 6.2. Make sure that switches for the light source and for the fan are both OFF and the voltage control handle is turned full to the left.
- 6.3. Connect the cord to power supply.
- 6.4. When the switch for the fan is put to ON, the fan works and the signal lamp is lighted at the same time.
- 6.5. Put the switch for light source to ON.
- 6.6. If you turn the voltage control handle slowly from this side to the opposite (right way round), the light source gradually becomes brighter.

Making it properly bright, measure the accuracy of Canon Meter according to the directions below

6.7. Measure 1

Set the film speed at ASA 100, shutter speed $1/8$ and the aperture ring AUTO.

Turn the time ring to the letter T.

Place the meter window equally to the center of the Opal Glass of the Inspection Device.

Boost voltage to the value indicated on the Data Sheet, Term 1, by turning the handle.

(For Reference: The brightness in this case is approximately LV 8, using ASA 100 film.)

Press the shutter button.

Detach the camera from the Inspection Device, watch the diaphragm from the back of the camera opening the hinged back and examine how the aperture works, following the directions below:

Turn the aperture ring slowly and check the point where the diaphragm begins to work, consulting the calibrated scales on the aperture ring. The aperture should show the value between F4 and F8.

Be sure to return the aperture ring to AUTO after measuring.

6.8. Measure 2

Repeat the same measure with ASA 100 and $1/125$, on the condition indicated on the Data Sheet, Term 2.

(For Reference: The brightness in this case is approximately LV 12, using ASA 100 film.)

The aperture should show the value between F4 and F8.

Be sure to return the aperture ring to AUTO after measuring.

6.9. Measure 3

Repeat the same measure with ASA 100 and $1/500$, on the condition indicated on the Data Sheet, Term 3.

(For Reference: The brightness in this case is approximately LV 14, using ASA 100 film.)

The aperture should show the value between F4 and F8.

Be sure to return the aperture ring to AUTO after measuring.

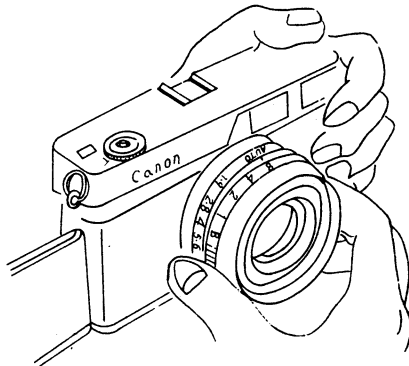


Fig. 1




Fig. 2

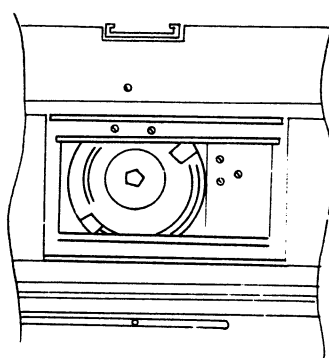


Fig. 3

Note: Fig. 1 Open the hinged back and turn the aperture ring from AUTO to the calibrated scales, watching the diaphragm from the back of the camera.

Fig. 2 The aperture at AUTO on this condition.

Fig. 3 Turning the aperture ring, you will find one point where the diaphragm begins to be stopped down furthermore.

BE SURE TO RETURN THE APERTURE RING TO AUTO AFTER MEASURING!

7. HOW TO INSPECT

7.1. Keep in mind that the brightness of the projection lamp, the light source of the Inspection Device, changes while being used. For the surface of the lamp becomes black and the quantity of light which falls on the Opal Glass is changed. When the filament of the projection lamp is burnt out, you should check the brightness on the Opal Glass with the new projection lamp you are going to use.

7.2. Use Canon Meter R which is correctly adjusted as the examining tool.

7.3. How to Examine

7.3.1. Choose one of the Canon meter as the standard and check it as soon as the Inspection Device is delivered to you.

7.3.2. Check the chosen Canon Meter R on the conditions according to the attached Data Sheet and record the indicated value.

7.3.3. Examine from time to time the Inspection Device by the chosen Canon Meter R and revise the voltage indication of each Term on the Data Sheet.

7.3.4. When you exchange the projection lamp with a new one, check it with the Canon Meter R above mentioned.

7.3.5. Be sure that the voltage indicated on the Data Sheet should be correct especially as for the low voltage(0-40V for 100V and 0-100V for 220V.)

7.4. The projection lamp used in the Inspection Device is that of JIS C 7511 Projection Lamp C 100V 500WS (Metallic Cap F27-22), which corresponds to ASA PH22.85-1953 Projection Lamp (Dimensions for T-10 Bulb)

8. HOW TO TREAT AND PRESERVE

8.1. Give neither vibration nor shock to the Inspection Device.

8.2. After use, let the voltage fall off to 0 by turning the handle left way round, put the switch for light source to OFF and, after it gets cool, put the switch for the fan to OFF.

8.3. Avoid as possible lighting continuously for long time.

8.4. Do not let the light from the outside (e.g. the sun, room lamp and so on) influence the Device while using.

(Above all, do not open the top cover and never allow direct rays to fall on the Opal Glass.)

HOW TO USE THE LOCATING JIG FOR THE EE-DRIVING SHAFT

1. NAME OF THE TOOL

Locating Jig for the EE-Driving Shaft.

2. PURPOSE

Set up and adjust the Lever C9281 of the EE-Driving Shaft of Canonet following the directions below. The Locating Jig is necessary for these cases: when the Screw S3787 which attaches the Lever C9281 to the Driving Shaft is loosened, when the Lever C9281 is to be exchanged and when the front panel with objective lens is to be disassembled, repaired and again assembled.


3. TO BE USED FOR

Canonet

4. COMPOSITION

(1) Locating Jig

5. OUTWARD APPEARANCE




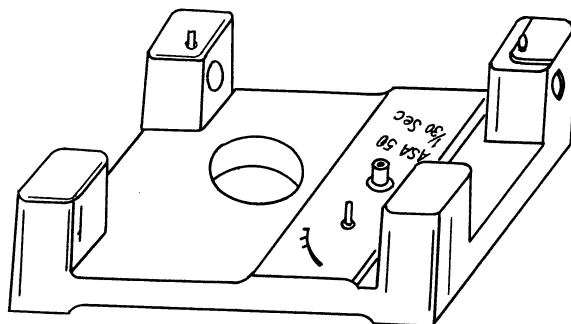



(Front)

6. HOW TO USE


- 6.1. Set the Locating Jig on a flat table in the position shown above.
- 6.2. Set the Film Speed to ASA 50, Shutter Speed 1/30 and Lens Aperture F5.6
- 6.3. Attach the front panel with objective lens or the body to the Jig so that pins of the Jig may get into two tapped holes which are under the Front Panel and that the point of the Driving Shaft may get into the guide of the Jig.
- 6.4. Adjust the height of the Lever C9281 so that its flange may touch that of the cradle when the calibration of the range viewfinder is set for the infinity mark ∞ .
- 6.5. Turn the Lever C9281 until it comes to the stopper position following the arrow of the Locating Jig and then fix the Lever on this point with Screw S3783 x 2.
- 6.6. Fix the Set Screw with special adhesive (Diabond No. 1640).

LIST OF SPECIAL SCREWDRIVERS FOR CANONET


		For tightening Pin Face Nut C4021 <i>See Repair Manual p. 5.</i>
T06A-C4021		
		For tightening Nut C4036 <i>See Repair Manual p. 5.</i>
T06A-C4036		
		For tightening Pin Face Screw C4104 <i>See Repair Manual p. 1.</i>
T06A-C4104		
		For tightening Bearing C4180 <i>See Repair Manual p. 3.</i>
T06A-C4180		
		For tightening Bearing C4181-02 <i>See Repair Manual p. 3.</i>
T06A-C4181		
		For tightening Shaft Screw C4205 <i>See Repair Manual p. 2.</i>
T06A-C4205		
		For tightening Nut C4238 <i>See Repair Manual p. 7.</i>
T06A-C4238		
		For tightening Nut C4248 <i>See Repair Manual p. 6.</i>
T06A-C4248		
		For tightening Assemble Collar C4261 <i>See Repair Manual p. 6.</i>
T06A-C4261		




T06A-C4263




T06A-C4264



T06A-C4265




T06A-C4266



T06A-C4267



T06A-C4331



For tightening Front Lens CU086

Inner side pin face slot is used.

See Repair Manual p. 6.

For tightening Front Lens CU086

Outer side pin face slot is used.

See Repair Manual p. 6.

For tightening Rear Lens CU087

Outer side pin face slot is used.

See Repair Manual p. 6.

For tightening Rear Lens CU087

Inner side pin face slot is used.

See Repair Manual p. 6.

For tightening Collar C4267

See Repair Manual p. 6.

For tightening Screw C4331

See Repair Manual p. 3.

CANON SERVICE MATERIALS MANUAL

CANONET

(REFERENCE NO. C-30206)

CANON CAMERA COMPANY, INC.

TOKYO, JAPAN

Following service materials are provided for Canonet. Expressly for the use of the lubricating oil, charts which show the part for each oil to be used are attached.

Lubricant

Grease

Perma-Lube C-3-3 75 %

Perma-Lube 3005 25 %

Perma-Lube IH-1

Mil-G 3278A

Liquid-Molybdenum

Mixture of
Mil-G3278A 96 %
MoS2 4 %

Oil

Squalol L-2

Launa

Adhesive

Diabond No. 1620

Diabond No. 1640

Pliobond

Epoxy resin


White adhesive

Paint

BL-I (Lustrous...for repair painting of the outside.)

BL-I (Lusterless...for defending the internal reflection.)

ATTACHED CHART (I)

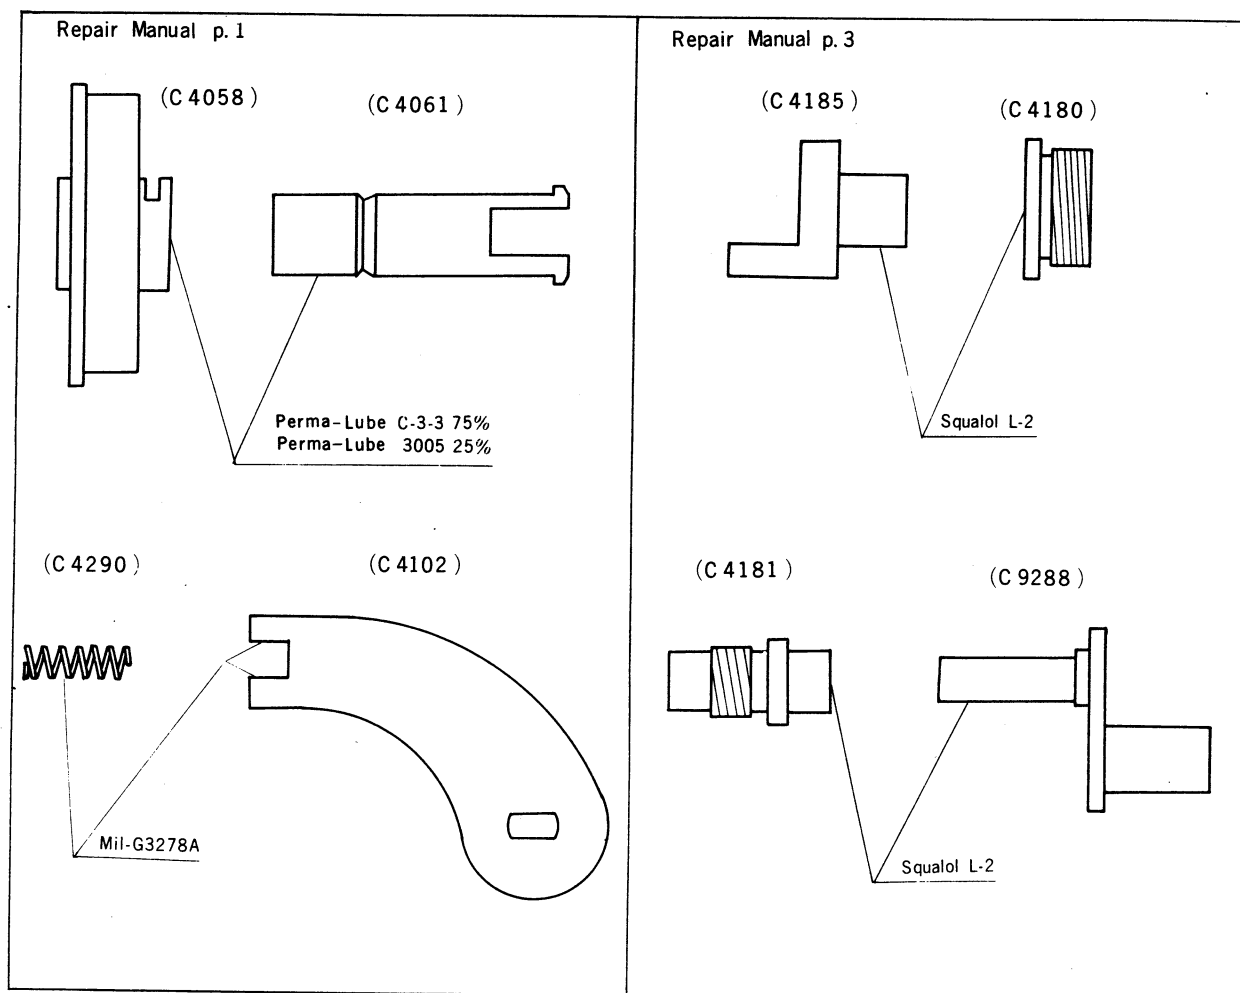


ATTACHED CHART (II)


Repair Manual p. 4

(C 4091)


(C 4328)

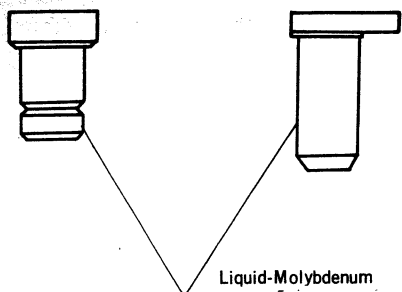

Repair Manual p. 5


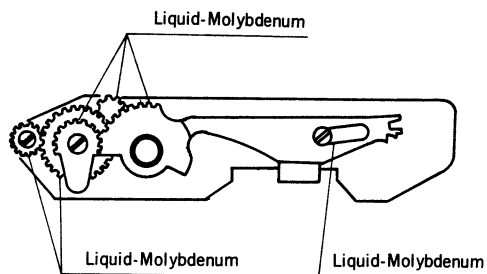


(C 9266)

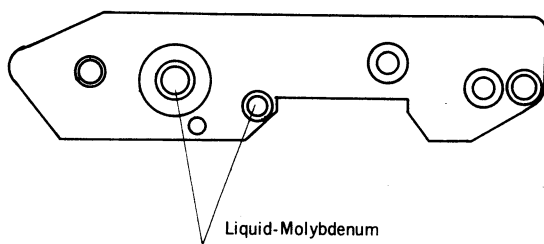

(C 4057)


(C 9263)



Repair Manual p. 6

(CU 086)


(CU 087)

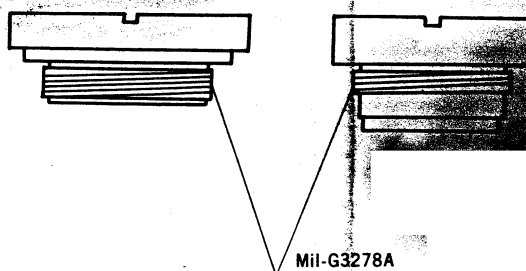

(CU 068)


(C 4178)

(C 4311)



Repair Manual p. 8

(CU 066)

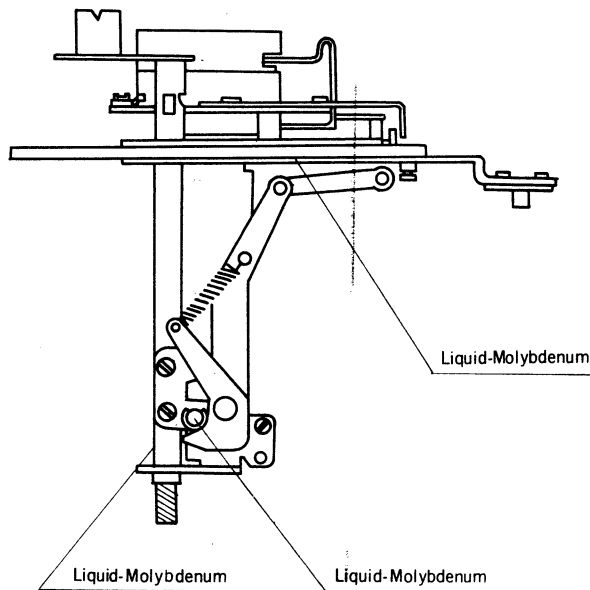

CANON REPAIR MANUAL


CANON CANONET QL 17
(REF. NO. 1-30761)

CANON INC. JAPAN

CONTENTS

	PAGE
TOP COVER 上部カバー	1
BASE COVER 下部カバー	1
REWIND CRANK 巻き戻レクランク	1
FRONT PANEL 前板ユニット	2, 2A
LENS UNIT レンズユニット	2, 2A
BACK COVER 裏 ぶ た	3
METER UNIT メーターユニット	3
RANGE-VIEW FINDER ファインダーユニット	4
WINDING MECHANISM 巻き上げ機構	4
BATTERY BOX 水銀電池室	5
FILM COUNTER 枚 数 盤	6
WINDING SHAFT 巻き上げ軸	6
TAKE UP SPOOL 巻き取りスプール	7
BODY 本 体	7
INDEX OF PARTS NUMBER 索 引	

EXPLODED VIEW
of
CANON CANONET QL 17

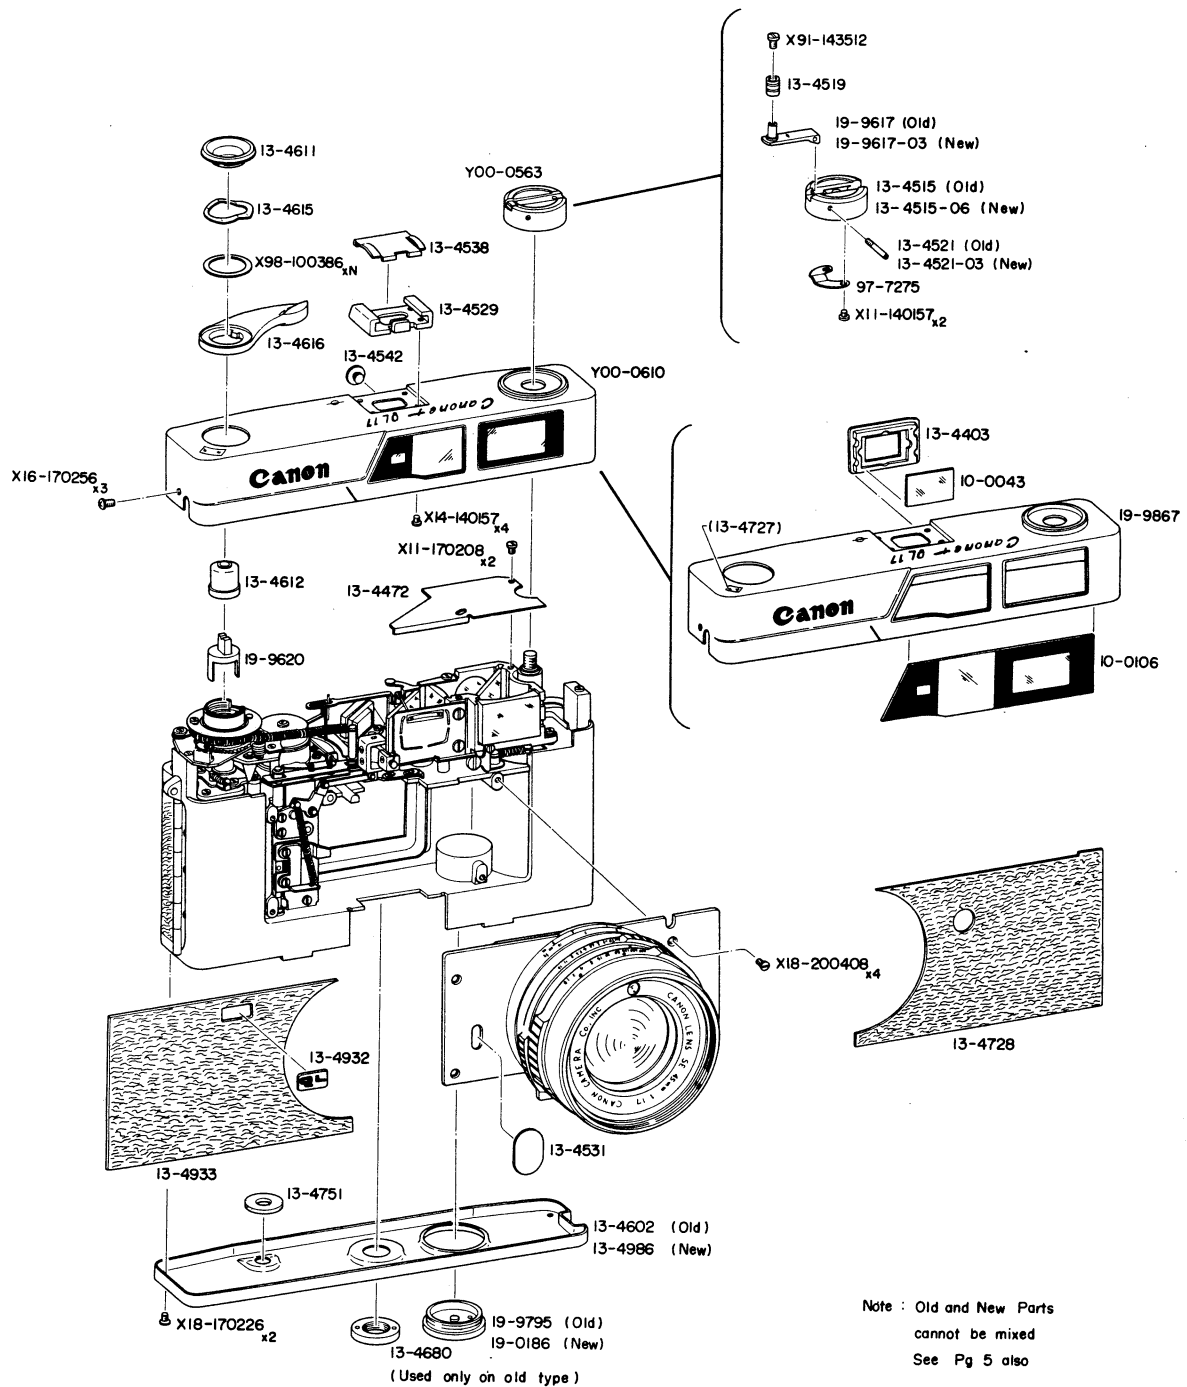


PARTS LIST

TOP COVER, BASE COVER & REWIND CRANK

上部 カバー 下部 カバー 巻き戻しクランク

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
巻き戻しクランク	C	Y00-0563	1	Rewind Crank
上 部 カ バ ー	C	Y00-0610	1	Top Cover
接 眼 レ ン ズ	B	10-0043	1	Eyepiece
前 面 ガ ラ ス	C	10-0106	1	Front Glass
接 眼 枠	C	13-4403	1	Eyepiece Holder
フ ァ イ ン ダ ー カ バ ー	E	13-4472	1	Finder Cover
巻き戻しつまみ	E	13-4515	1	Rewind Knob
巻き戻しつまみ	E	13-4515-06	1	Rewind Knob
つ ま み	D	13-4519	1	Rewind Crank Head
ク ラ ン ク 軸	E	13-4521	1	Pivot
ク ラ ン ク 軸	E	13-4521-03	1	Pivot
ア ク セ サ リ ー シ ュ ー	B	13-4529	1	Accessory Shoe
カ バ ー	C	13-4531	1	Cover
ア ク シ ュ ー カ バ ー	C	13-4538	1	Accessory Shoe Cover
キ ャ ッ プ	D	13-4542	1	Cap
下 部 カ バ ー	D	13-4602	1	Base Cover
シ ャ ッ タ ー 釦 リ ン グ	D	13-4611	1	Shutter Button Guard
シ ャ ッ タ ー 釦	D	13-4612	1	Shutter Button
ス プ リ ン グ ワ ッ シ ャ ー	D	13-4615	1	Spring Washer
巻 き 上 げ レ バ ー	D	13-4616	1	Winding Lever
ナ ッ ト	D	13-4680	1	Nut
枚 数 盤 窓	D	13-4727	1	Counter Window
レ ザ ー	B	13-4728	1	Leather
遮 光 枚	D	13-4751	1	Light Shield
Q L マ ー ク	D	13-4932	1	QL Mark
レ ザ ー	B	13-4933	1	Leather
下 部 カ バ ー	E	13-4986	1	Base Cover
水 銀 電 池 室 ふ た	C	19-0186	1	Battery Cover
巻き戻しクランク	E	19-9617	1	Rewind Crank
巻き戻しクランク	E	19-9617-03	1	Rewind Crank
シ ャ ッ タ ー 釦 座	D	19-9620	1	Shutter Button Base
水 銀 電 池 室 ふ た	C	19-9795	1	Battery Cover
上 部 カ バ ー	C	19-9867	1	Top Cover
ク リ ッ ク ス プ リ ン グ	E	97-7275	1	Click Spring
平 ビ ス		X11-140157	2	Screw
平 ビ ス		X11-170208	2	Screw
皿 ビ ス		X14-140157	4	Screw
十 字 ナ ベ ビ ス		X16-170256	2	Screw
十 字 皿 ビ ス		X18-170226	2	Screw
十 字 皿 ビ ス		X18-200408	4	Screw
平 ビ ス		X91-143512	1	Screw
ワ ッ シ ャ ー		X98-100386	N	Washer

EXPLODED VIEW
of
CANON CANONET QL 17

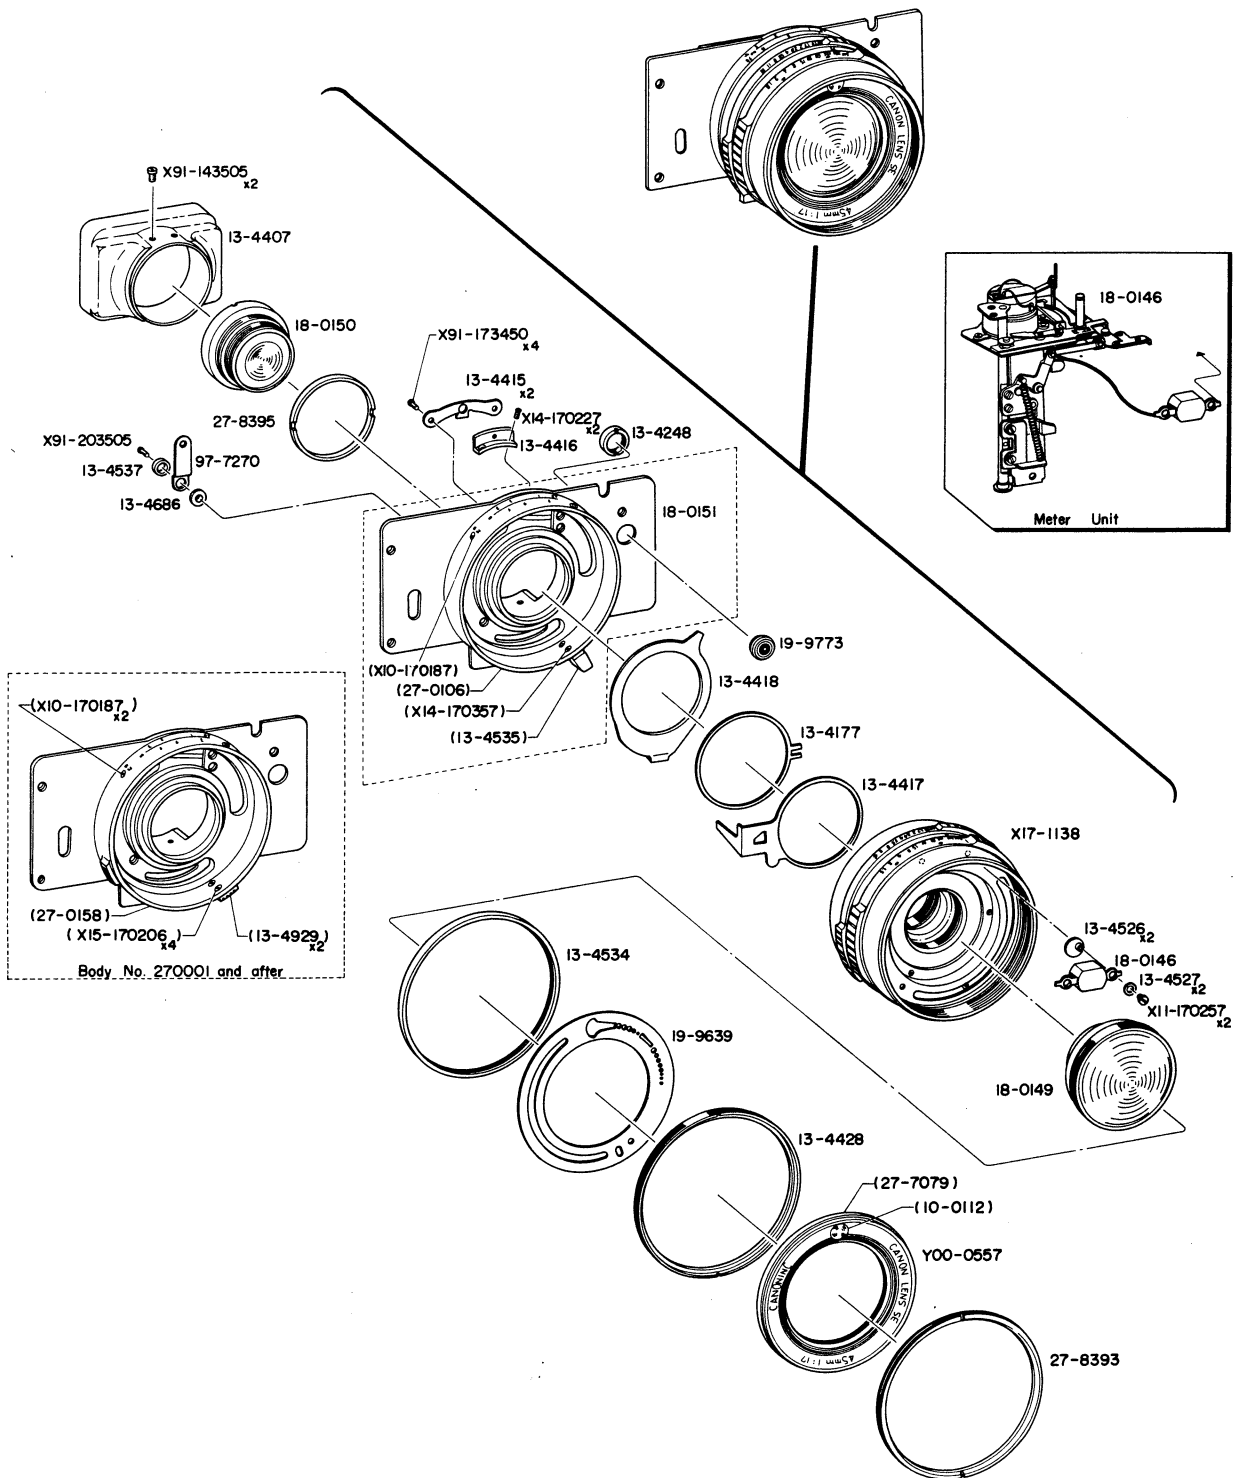

PARTS LIST

FRONT PANEL & LENS UNIT

前板ユニット レンズユニット


部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
前 枠	D	Y00-0557	1	Name Ring
フ レ ネ ル レ ン ズ	E	10-0112	1	Fresnel Lens
中 間 リ ン グ	D	13-4177	1	Intermediate Ring
ナ ッ ト	E	13-4248	1	Nut
遮 光 筒	D	13-4407	1	Light Shield
ヘ リ コ イ ド キ ー	D	13-4415	2	Helicoid Key
連 動 た て	E	13-4416	1	Rengifinder Coupler
レ リ ー ズ リ ン グ	E	13-4417	1	Shutter Release Ring
チャ ー ジ リ ン グ	D	13-4418	1	Shutter Charge Ring
押 え 環	D	13-4428	1	Assembly Collar
絶 縁 板	D	13-4526	2	Insulator
絶 縁 板	D	13-4527	2	Insulator
ス ペ ー サ ー	E	13-4534	1	Spacer
距 離 リ ン グ つ ま み	E	13-4535	1	Focusing Knob
絶 縁 板	D	13-4537	1	Insulator
絶 縁 板	D	13-4686	1	Insulator
距 離 リ ン グ つ ま み	D	13-4929	2	Focusing Knob
メ ー タ ー ユ ニ ッ ト	C	18-0146	1	Meter Unit
前 玉 ユ ニ ッ ト	C	18-0149	1	Front Lens Unit
後 玉 ユ ニ ッ ト	C	18-0150	1	Rear Lens Unit
前 板 ユ ニ ッ ト	D	18-0151	1	Front Panel
前 板 ユ ニ ッ ト	D	18-0290	1	Front Panel
絞 り 板	D	19-9639	1	Diaphragm Plate
フ ラ ッ シ ュ タ ー ミ ナ ル	C	19-9773	1	Flash Terminal
距 離 環	D	27-0106	1	Focusing Ring
距 離 環	E	27-0158	1	Focusing Ring
前 枠	E	27-7079	1	Name Ring
押 え 環	E	27-8393	1	Assembly Collar
押 え 環	D	27-8395	1	Assembly Collar
メ ー タ ー 接 片	E	97-7270	1	Meter Contact
止 め ビ ス		X10-170187	4	Screw
平 ビ ス		X11-170257	2	Screw
皿 ビ ス		X14-170227	2	Screw
皿 ビ ス		X14-170357	2	Screw
丸 皿 ビ ス		X15-170206	1	Screw
シ ャ ッ タ ー		X71-1138	1	Shutter
平 ビ ス		X91-143505	2	Screw
平 ビ ス		X91-173450	4	Screw
平 ビ ス		X91-203505	1	Screw

FRONT PANEL & LENS UNIT

前板ユニット レンズユニット

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
前 枠	D	Y00-0557	1	Name Ring
フ レ ネ ル レ ン ズ	E	10-0112	1	Fresnel Lens
中 間 リ ン グ	D	13-4177	1	Intermediate Ring
ナ ッ ト	E	13-4248	1	Nut
ヘ リ コ イ ド キ ー	D	13-4415	2	Helicoid Key
連 動 た て	E	13-4416	1	Rengifinder Coupler
レ リ ー ズ リ ン グ	E	13-4417	1	Shutter Release Ring
押 え 環	D	13-4428	1	Assembly Collar
絶 縁 板	D	13-4526	2	Insulator
絶 縁 板	D	13-4527	2	Insulator
ス ペ ー サ ー	E	13-4534	1	Spacer
絶 縁 板	D	13-4537	1	Insulator
絶 縁 板	D	13-4686	1	Insulator
遮 光 筒	E	13-4902	1	Light Shield
チ ャ ー ジ リ ン グ	E	13-4903	1	Shutter Charge Ring
距 離 環 つ ま み	E	13-4908	1	Focusing Ring Knob
メ ー タ ー ユ ニ ッ ト	C	18-0146	1	Meter Unit
前 玉 ユ ニ ッ ト	C	18-0332	1	Front Lens Unit
後 玉 ユ ニ ッ ト	C	18-0333	1	Rear Lens Unit
前 板 ユ ニ ッ ト	D	18-0339	1	Front Panel
絞 り 板	D	19-9639	1	Diaphragm Plate
フ ラ ッ シ ュ タ ー ミ ナ ル	C	19-9773	1	Flash Terminal
距 離 環	E	27-0158-02	1	Focusing Ring
前 枠	E	27-7079	1	Name Ring
押 え 環	E	27-8393	1	Assembly Collar
押 え 環	D	27-8395	1	Assembly Collar
メ ー タ ー 接 片	E	97-7270	1	Meter Contact
止 め ビ ス		X10-170187	3	Screw
平 ビ ス		X11-170257	2	Screw
皿 ビ ス		X14-170227	2	Screw
皿 ビ ス		X14-170357	2	Screw
シ ャ ッ タ ー		X71-1153	1	Shutter
平 ビ ス		X91-143505	2	Screw
平 ビ ス		X91-173450	4	Screw
平 ビ ス		X91-203505	1	Screw

EXPLODED VIEW
of
CANON CANONET QL 17

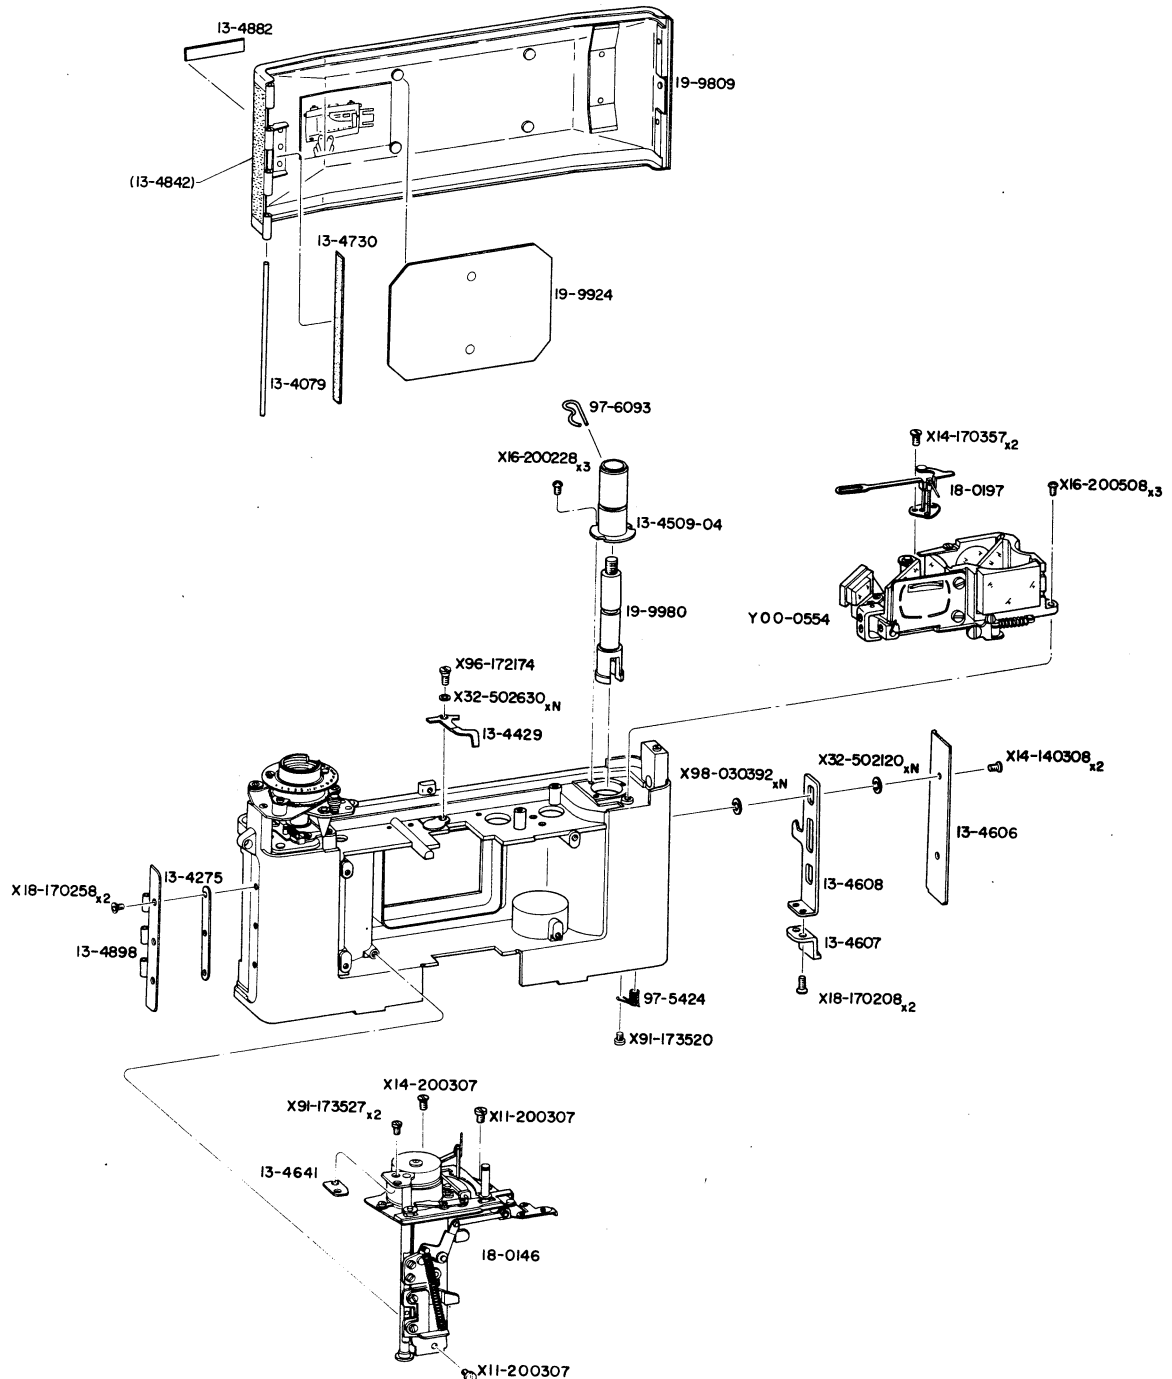


PARTS LIST

BACK COVER & METTER UNIT

裏 ぶ た メーターユニット

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
フ ァ イ ン ダ ー ユ ニ ッ ト	D	Y00-0554	1	Range Viewfinder
蝶 番 軸	D	13-4079	1	Shaft of Hinge
ワ ッ シ ャ ー	E	13-4275	N	Shim
E E レ バ ー	E	13-4429	1	EE Lever
巻 き 戻 し 軸 受 け	E	13-4509-04	1	Rewind Shaft Holder
開 閉 爪 カ バ ー	E	13-4606	1	Hook Cover
開 閉 爪 つ ま み	E	13-4607	1	Cover Opening Lever
開 閉 爪	E	13-4608	1	Hook
ワ ッ シ ャ ー	D	(13-4641(0.1mm) 13-4641(0.2mm))	1	Washer
遮 光 板	E	13-4730	1	Light Shield
レ ザ ー	E	13-4842	1	Leather
N o . プ レ ー ト	D	13-4882	1	Number Plate
蝶 番	D	13-4898	1	Hinge
メ ー タ ー ユ ニ ッ ト	C	18-0146	1	Meter Unit
ヘ リ コ プ タ ー	D	18-0197	1	Meter Needle
裏 ぶ た	D	19-9809	1	Back Cover
圧 着 板	D	19-9924	1	Pressure Plate
巻 き 戻 し 軸	D	19-9980	1	Rewind Shaft
コ イ ル ス プ リ ン グ	E	97-5424	1	Coil Spring
ス プ リ ン グ	D	97-6093	1	Spring
平 ビ ス		X11-200307	2	Screw
皿 ビ ス		X14-140308	2	Screw
皿 ビ ス		X14-170308	2	Screw
皿 ビ ス		X14-170357	2	Screw
皿 ビ ス		X14-200307	1	Screw
十 字 ナ ベ ビ ス		X16-200228	3	Screw
十 字 ナ ベ ビ ス		X16-200508	3	Screw
十 字 皿 ビ ス		X18-170208	2	Screw
十 字 皿 ビ ス		X18-170258	3	Screw
ワ ッ シ ャ ー		X32-502120	N	Washer
ワ ッ シ ャ ー		X32-502630	N	Washer
平 ビ ス		X91-172174	1	Screw
平 ビ ス		X91-173520	1	Screw
平 ビ ス		X91-173527	2	Screw
段 ビ ス		X96-172174	1	Screw
ワ ッ シ ャ ー		(X98-030392 X98-030393)	N	Washer

EXPLODED VIEW
of
CANON CANONET QL 17

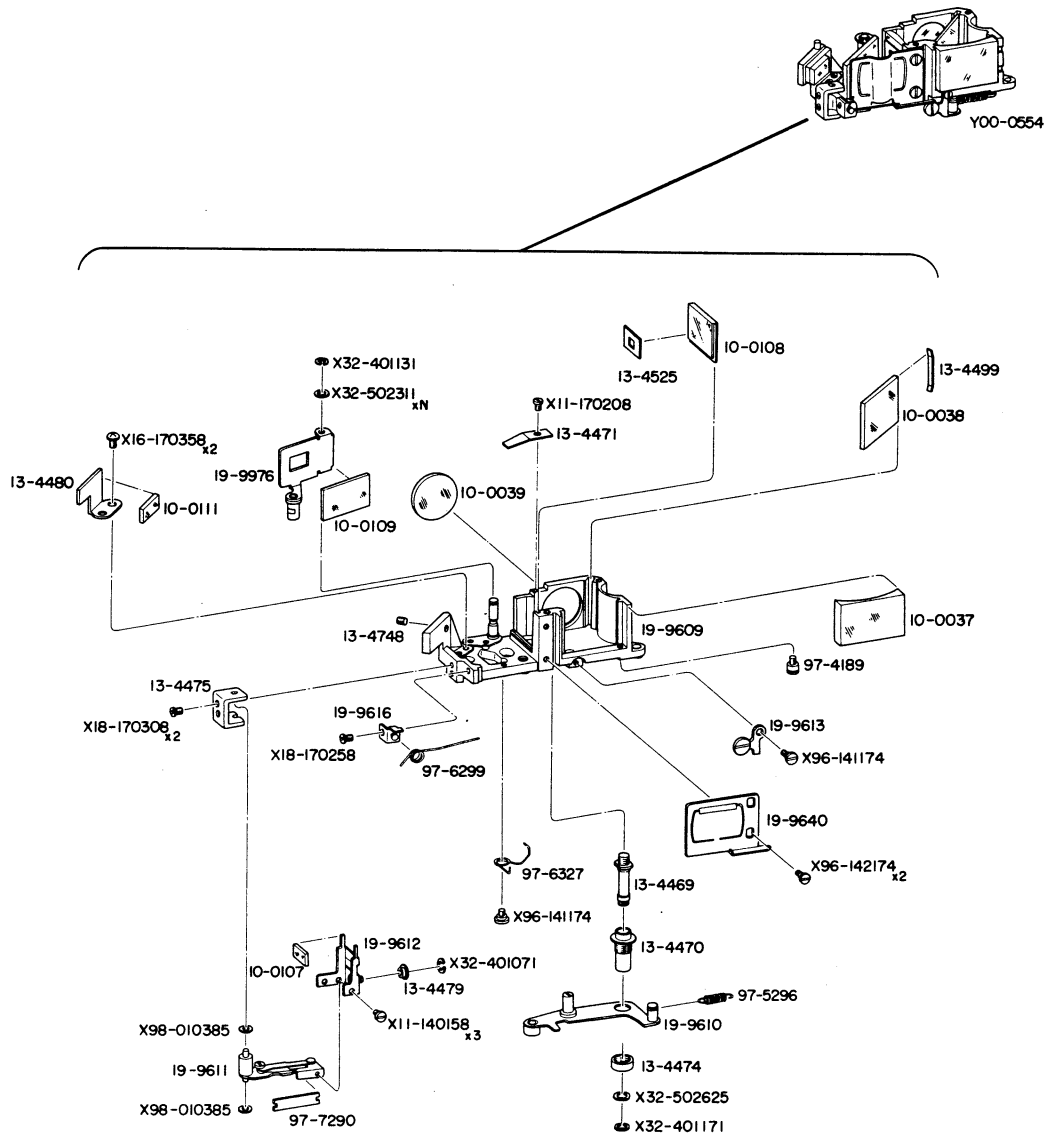


PARTS LIST

RANGE-VIEWFINDER

ファインダー ユニット

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ファインダーユニット	D	Y00-0554	1	Range Viewfinder
対 物 レ ン ズ	D	10-0037	1	Lens Element
ハ ー フ ミ ラ ー	D	10-0038	1	Half Mirror
接 眼 レ ン ズ	D	10-0039	1	Lens Element
レ ン ズ	E	10-0107	1	Lens Element
レ ン ズ	E	10-0108	1	Lens Element
ミ ラ ー	D	10-0109	1	Mirror
ミ ラ ー	D	10-0111	1	Mirror
連 動 レ バ ー 軸	E	13-4469	1	Stud
ス リ ー ブ	E	13-4470	1	Sleeve
レ ン ズ 押 え	E	13-4471	1	Lens Holder
ナ ッ ト	E	13-4474	1	Nut
バ ネ 板 軸 受	D	13-4475	1	Spring Lever Support
ロ ー ラ ー	E	13-4479	1	Roller
ミ ラ ー ホ ル ダ ー	E	13-4480	1	Mirror Holder
板 バ ネ	E	13-4499	1	Plate Spring
マ ス ク	E	13-4525	1	Mask
セ ッ ト ビ ス	E	13-4748	1	Screw
フ ァ イ ン ダ ー 地 板	E	19-9609	1	Finder Base
連 動 レ バ ー	E	19-9610	1	Coupling Lever
バ ネ 板	E	19-9611	1	Spring Lever
移 動 板	E	19-9612	1	Shift Lever
フ レ ー ム 上 下 レ バ ー	E	19-9613	1	Mask Tilting Lever
マ ス ク ホ ル ダ ー	E	19-9616	1	Mask Holder
フ ァ イ ン ダ ー マ ス ク	D	19-9640	1	Finder Mask
ミ ラ ー 金 具	E	19-9976	1	Mirror Support
バ ネ 掛 け ビ ス	E	97-4189	1	Screw
コ イ ル ス プ リ ン グ	E	97-5296	1	Coil Spring
ス プ リ ン グ	E	97-6299	1	Spring
ス プ リ ン グ	D	97-6327	1	Spring
板 ス プ リ ン グ	E	97-7290	1	Plate Spring
平 ビ ス		X11-140158	3	Screw
平 ビ ス		X11-170208	1	Screw
十 字 ナ ベ ビ ス		X16-170358	2	Screw
十 字 皿 ビ ス		X18-170258	1	Screw
十 字 皿 ビ ス		X18-170308	1	Screw
緊 定 ワ ッ シ ャ ー		X32-401071	1	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401131	1	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401171	1	Retaining Washer
ワ ッ シ ャ ー		X32-502311	N	Washer
ワ ッ シ ャ ー		X32-502625	1	Washer
段 ビ ス		X96-141174	2	Screw
段 ビ ス		X96-142174	2	Screw
ワ ッ シ ャ ー		X98-010385	2	Washer

EXPLODED VIEW
of
CANON CANONET QL 17

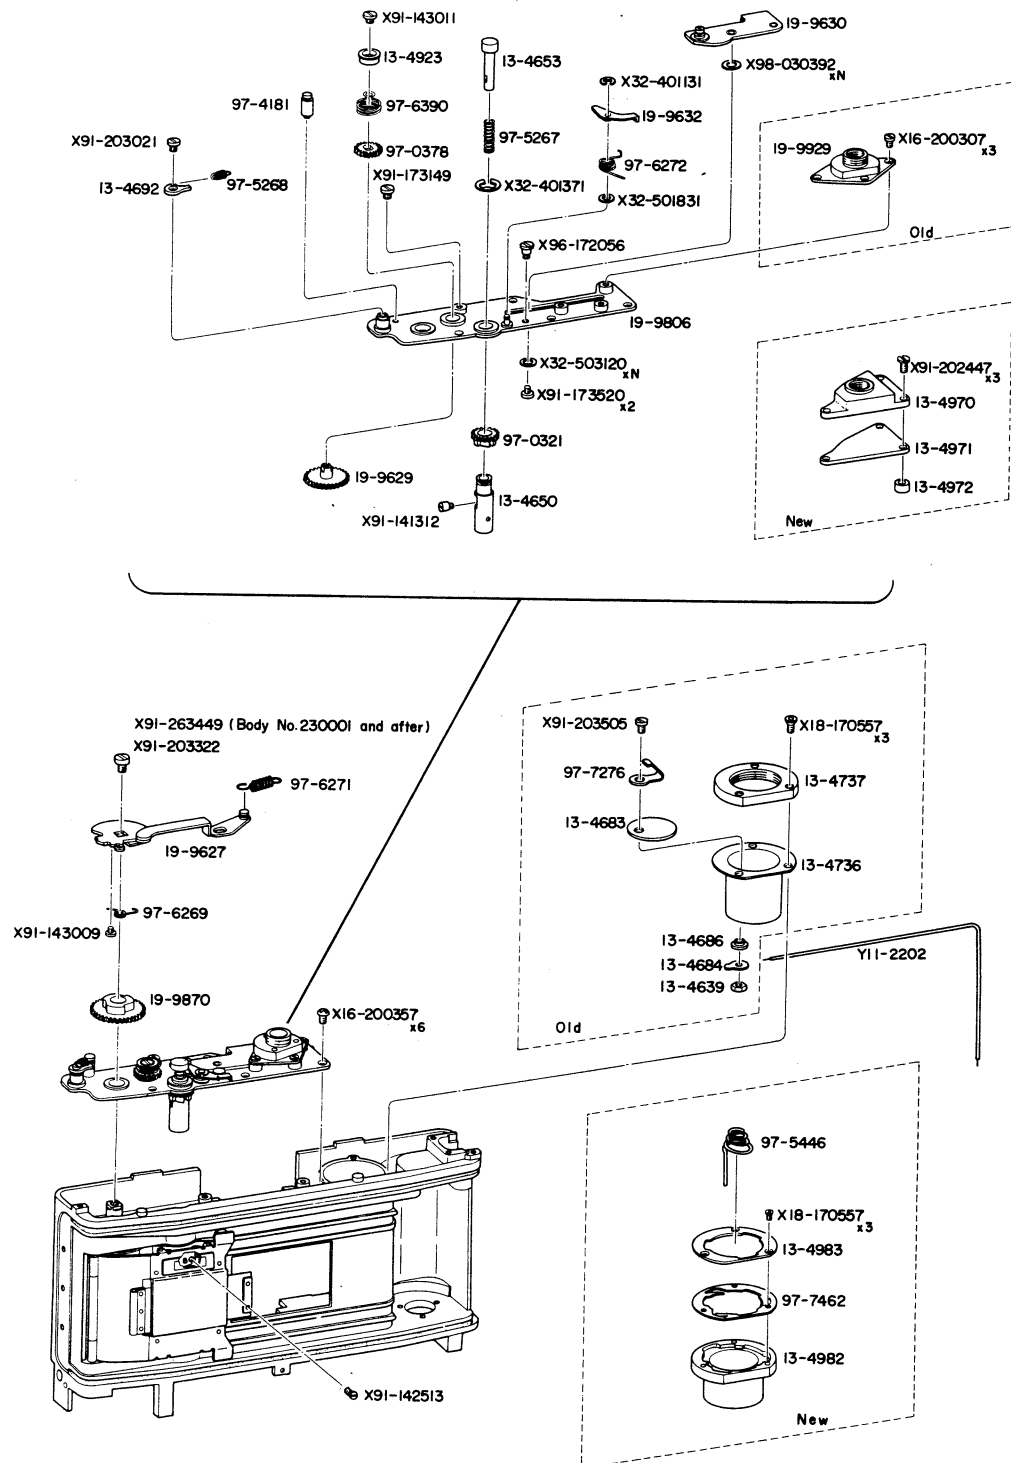

PARTS LIST


WINDING MECHANISM & BATTERY BOX

巻き上げ機構

水銀電池室

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ナ ッ ト	D	13-4639	1	Nut
ス ブ ロ ケ ッ ト 軸	E	13-4650	1	Sprocket Shaft
巻 き 戻 し 釦	D	13-4653	1	Rewind Button
絶 縁 板	E	13-4683	1	Insulator
ラ グ 板	D	13-4684	1	Lug
絶 縁 板	D	13-4686	1	Insulator
三 角 爪	D	13-4692 (5.8) 13-4692 (6.0) 13-4692 (6.2)	1	Triangle Claw
水 銀 電 池 室	E	13-4736	1	Battery Box
水 銀 電 池 室 押 え	D	13-4737	1	Battery Box Frame
カ ラ ー	E	13-4923	1	Collar
三 脚 取 り 付 け ネ ジ	E	13-4970	1	Tripod Socket
ス ベ ー サ ー	E	13-4971	1	Tripod Socket Base
カ ラ ー	E	13-4972	3	Collar
水 銀 電 池 室	E	13-4982	1	Battery Box
水 銀 電 池 室 押 え	E	13-4983	1	Battery Box Holder
巻 き 上 げ ア ー ム	D	19-9627	1	Winding Pawl
ア イ ド ル ギ ャ ー	D	19-9629	1	Idle Gear
チ ャ ー ジ 板	D	19-9630	1	Shutter Charge Plate
ラ チ ェ ッ ト レ バ ー	E	19-9632	1	Rewind Clamp Lever
巻 き 上 げ 地 板	E	19-9806	1	Winding Base Plate
巻 き 上 げ ギ ャ ー	D	10-0970	1	Winding Gear
三 脚 取 り 付 け ネ ジ	D	19-9929	1	Tripod Socket
ス ブ ロ ケ ッ ト ギ ャ ー	D	97-0321	1	Sprocket Gear
逆 転 防 止 ギ ャ ー	E	97-0378	1	Anti-Reversing Gear
バ ネ 掛 け ビ ス	D	97-4181	1	Screw
コ イ ル ス プ リ ン グ	B	97-5267	1	Coil Spring
コ イ ル ス プ リ ン グ	D	97-5268	1	Coil Spring
コ イ ル ス プ リ ン グ	E	97-5446	1	Coil Spring
ス プ リ ン グ	D	97-6269	1	Spring
ス プ リ ン グ	D	97-6271	1	Spring
ス プ リ ン グ	D	97-6272	1	Spring
ス プ リ ン グ	E	97-6390	1	Spring
接 片	D	97-7276	1	Contact
ス プ リ ン グ	E	97-7462	1	Spring
十 字 ナ ベ ビ ス		X16-200307	3	Screw
十 字 ナ ベ ビ ス		X16-200357	6	Screw
十 字 皿 ビ ス		X18-170557	6	Screw
緊 定 ワ ッ シ ャ ー		X32-401131	1	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401371	1	Retaining Washer
ワ ッ シ ャ ー		X32-501831	1	Washer
ワ ッ シ ャ ー		X32-503120	N	Washer
平 ビ ス		X91-141312	1	Screw
平 ビ ス		X91-142513	1	Screw
平 ビ ス		X91-143009	1	Screw
平 ビ ス		X91-143011	1	Screw
平 ビ ス		X91-173149	1	Screw
平 ビ ス		X91-173520	2	Screw
平 ビ ス		X91-202447	3	Screw
平 ビ ス		X91-203322	1	Screw
平 ビ ス		X91-263449	1	Screw
段 ビ ス		X96-172056	1	Screw
ワ ッ シ ャ ー		X98-030392 X98-030393	N	Washer
リ ー ド 線 (黒)		Y11-2202	1	Lead (Black)

EXPLODED VIEW
of
CANON CANONET QL 17

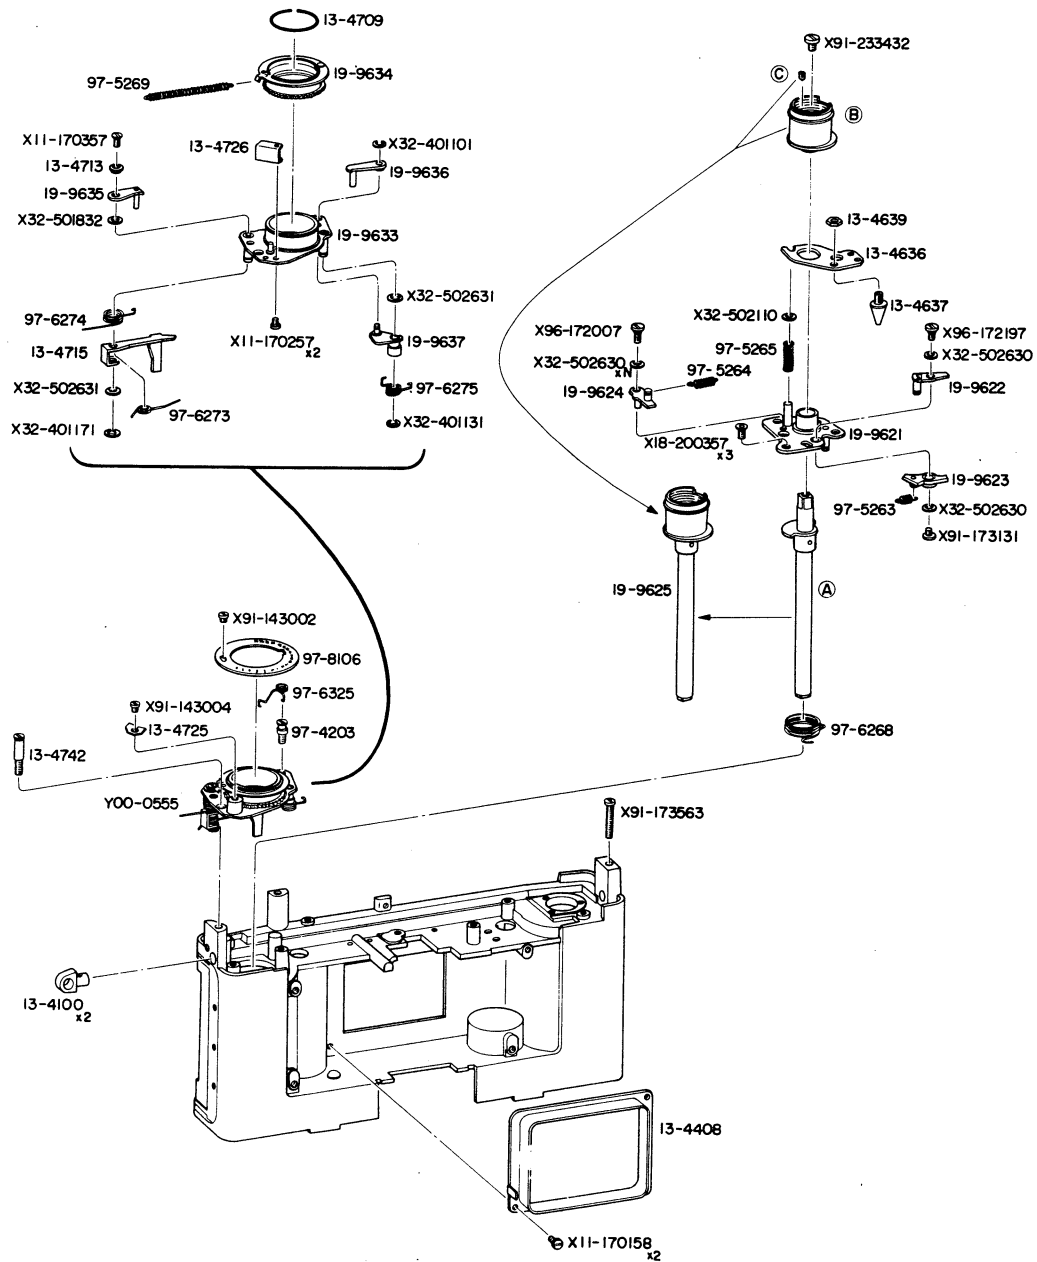

PARTS LIST


FILM COUNTER & WINDING SHAFT

枚数盤

巻き上げ軸

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
枚 数 盤 ユ ニ ッ ト	D	Y00-0555	1	Film Counter Unit
吊 環	D	13-4100	2	Neck Strap Catch
遮 光 板	D	13-4408	1	Light Shield
円 錐 板	D	13-4636	1	Shutter Release Plate
円 錐	D	13-4637	1	Cone
ナ ッ ト	D	13-4639	1	Nut
リ テ イ ナ ー	E	13-4709	1	Retainer
偏 芯 カ ラ ー	E	13-4713	1	Eccentric Collar
リ セ ッ ト レ バ ー	E	13-4715	1	Resetting Lever
指 標	E	13-4725	1	Counter Index
指 標 座	E	13-4726	1	Counter Index Base
ビ ス	D	13-4742	1	Screw
巻 き 上 げ 地 板	D	19-9621	1	Winding Base
安 全 爪 1	D	19-9622	1	Safety Pawl - 1
安 全 爪 2	D	19-9623	1	Safety Pawl - 2
安 全 爪 3	D	19-9624	1	Safety Pawl - 3
巻 き 上 げ 軸	D	19-9625	1	Winding Shaft
枚 数 盤 地 板	E	19-9633	1	Counter Base
枚 数 盤 ギ ヤ ー	E	19-9634	1	Counter Gear
ス ト ッ プ 爪	E	19-9635	1	Stopper Claw
送 リ 爪	E	19-9636	1	Feeding Claw
送 リ 爪 カ ム	E	19-9637	1	Feeding Cam
バ ネ 掛 け ビ ス	D	97-4203	1	Screw
コ イ ル ス プ リ ン グ	D	97-5263	1	Coil Spring
コ イ ル ス プ リ ン グ	D	97-5264	1	Coil Spring
コ イ ル ス プ リ ン グ	D	97-5265	1	Coil Spring
コ イ ル ス プ リ ン グ	D	97-5269	1	Coil Spring
ス プ リ ン グ	D	97-6268	1	Spring
ス プ リ ン グ	E	97-6273	1	Spring
ス プ リ ン グ	E	97-6274	1	Spring
ス プ リ ン グ	E	97-6275	1	Spring
ス プ リ ン グ	D	97-6325	1	Spring
枚 数 盤	D	97-8106	1	Film Counter
平 ビ ス		X11-170158	2	Screw
平 ビ ス		X11-170257	2	Screw
平 ビ ス		X11-170357	1	Screw
十 字 皿 ビ ス		X18-200357	3	Screw
緊 定 ワ ッ シ ャ ー		X32-401101	1	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401131	1	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401171	1	Retaining Washer
ワ ッ シ ャ ー		X32-501832	1	Washer
ワ ッ シ ャ ー		X32-502110	1	Washer
ワ ッ シ ャ ー		X32-502630	N	Washer
ワ ッ シ ャ ー		X32-502631	N	Washer
平 ビ ス		X91-143002	1	Screw
平 ビ ス		X91-143004	1	Screw
平 ビ ス		X91-173131	1	Screw
平 ビ ス		X91-173563	1	Screw
平 ビ ス		X91-233432	1	Screw
段 ビ ス		X96-172007	1	Screw
段 ビ ス		X96-172197	1	Screw

EXPLODED VIEW
of
CANON CANONET QL 17

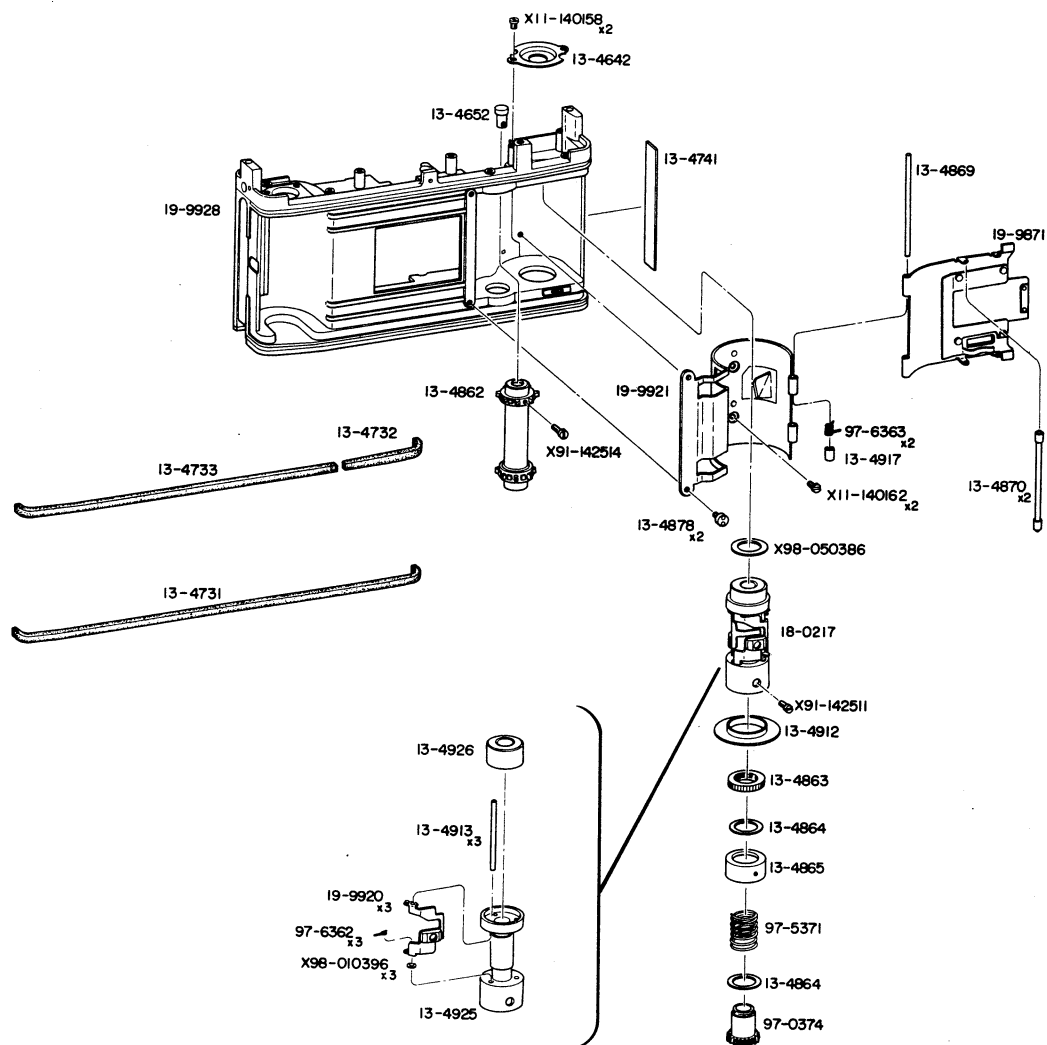

PARTS LIST

TAKE UP SPOOL & BODY

巻き取り スプール 本体

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
遮 光 板	E	13-4642	1	Light Shield
ス プ ロ ケ ッ ト 頭	D	13-4652	1	Sprocket Head
遮 光 板	D	13-4731	1	Light Shield
遮 光 板	E	13-4732	1	Light Shield
遮 光 板	D	13-4733	1	Light Shield
遮 光 板	D	13-4741	1	Light Shield
ス プ ロ ケ ッ ト	D	13-4862	1	Sprocket
ナ ッ ト	E	13-4863	1	Nut
フ ァ イ バ ー	E	13-4864	2	Fiber
ス プ リ ン グ カ バ ー	E	13-4865	1	Spring Cover
蝶 番 軸	D	13-4869	1	Shaft of Hinge
ロ ー ラ ー	D	13-4870	2	Anti-Curl Roller
カ ニ 目 ビ ス	D	13-4878	2	Pin Face Screw
ス プ ー ル フ ラ ン ジ	E	13-4912	1	Spool Flange
水 か き 軸	E	13-4913	3	Shaft
カ ラ ー	E	13-4917	1	Collar
巻 き 取 り 軸	E	13-4925	1	Take Up Spool
キ ャ ッ プ	E	13-4926	1	Spool Cap
ス プ ー ル ユ ニ ッ ト	D	18-0217	1	Take Up Spool
中 ぶ た	D	19-9871	1	Inner Cover
水 か き	E	19-9920	3	Friction Rubber
ス プ ロ ケ ッ ト カ バ ー	E	19-9921	1	Sprocket Cover
本 体	E	19-9928	1	Body
ス プ ー ル ギ ヤ	E	97-0374	1	Spool Gear
コ イ ル ス プ リ ン グ	E	97-5371	1	Coil Spring
ス プ リ ン グ	E	97-6362	3	Spring
ス プ リ ン グ	E	97-6363	2	Sspring
平 ビ ス		X11-140158	2	Screw
平 ビ ス		X11-140162	2	Screw
平 ビ ス		X91-142511	1	Screw
平 ビ ス		X91-142514	1	Screw
ワ ッ シ ャ ー		X98-010396	3	Washer
ワ ッ シ ャ ー		X98-050386	N	Washer

INDEX OF PARTS NUMBERS

PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE
Y00-0554	3, 4	13-4534	2, 2A	13-4878	7	19-9630	5
Y00-0555	6	13-4535	2	13-4882	3	19-9632	5
Y00-0557	2, 2A	13-4537	2, 2A	13-4898	3	19-9633	6
Y00-0563	1	13-4538	1	13-4902	2A	19-9634	6
Y00-0610	1	13-4542	1	13-4903	2A	19-9635	6
		13-4602	1	13-4908	2A	19-9636	6
10-0037	4	13-4606	3	13-4912	7	19-9637	6
10-0038	4	13-4607	3	13-4913	7	19-9639	2, 2A
10-0039	4	13-4608	3	13-4917	7	19-9640	4
10-0043	1	13-4611	1	13-4923	5	19-9773	2, 2A
10-0106	1	13-4612	1	13-4925	7	19-9795	1
10-0107	4	13-4615	1	13-4926	7	19-9806	5
10-0108	4	13-4616	1	13-4929	2	19-9809	3
10-0109	4	13-4636	6	13-4932	1	19-9870	5
10-0111	4	13-4637	6	13-4933	1	19-9871	7
10-0112	2, 2A	13-4639	5, 6	13-4970	5	19-9920	7
		13-4641	3	13-4971	5	19-9921	7
13-4079	3	13-4642	7	13-4972	5	19-9924	3
13-4100	6	13-4650	5	13-4982	5	19-9928	7
13-4177	2, 2A	13-4652	7	13-4983	5	19-9929	5
13-4248	2, 2A	13-4653	5	13-4986	1	19-9976	4
13-4275	3	13-4680	1			19-9980	3
13-4403	1	13-4683	5	18-0146	2, 2A, 3		
13-4407	2	13-4684	5	18-0149	2	27-0106	2
13-4408	6	13-4686	2, 2A, 5	18-0150	2	27-0158	2
13-4415	2, 2A	13-4692	5	18-0151	2	27-0158-02	2A
13-4416	2, 2A	13-4709	6	18-0197	3	27-7079	2, 2A
13-4417	2, 2A	13-4713	6	18-0217	7	27-8393	2, 2A
13-4418	2	13-4715	6	18-0290	2	27-8395	2, 2A
13-4428	2, 2A	13-4725	6	18-0332	2A		
13-4429	3	13-4726	6	18-0333	2A	97-0321	5
13-4469	4	13-4726	1	18-0339	2A	97-0374	7
13-4470	4	13-4728	1			97-0378	5
13-4471	4	13-4730	3	19-0186	1	97-4181	5
13-4472	1	13-4731	7	19-9609	4	97-4189	4
13-4474	4	13-4732	7	19-9610	4	97-4203	6
13-4475	4	13-4733	7	19-9611	4	97-5263	6
13-4479	4	13-4736	5	19-9612	4	97-5264	6
13-4480	4	13-4737	5	19-9613	4	97-5267	5
13-4499	4	13-4741	7	19-9616	4	97-5268	5
13-4599-04	3	13-4742	6	19-9617	1	97-5269	6
13-4515	1	13-4748	4	19-9617-03	1	97-5296	4
13-4515-06	1	13-4751	1	19-9620	1	97-5371	7
13-4519	1	13-4842	3	19-9621	6	97-5424	3
13-4521	1	13-4862	7	19-9622	6	97-5446	5
13-4521-03	1	13-4863	7	19-9623	6	97-6093	3
13-4526	2, 2A	13-4864	7	19-9624	6	97-6268	6
13-4527	2, 2A	13-4865	7	19-9625	6	97-6269	5
13-4529	1	13-4869	7	19-9627	5	97-6271	5
13-4531	1	13-4870	7	19-9629	5	97-6272	5

PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE
97-6273	6	X32-401071	4	X98-030392	3,5
97-6274	6	X32-401101	6	X98-050386	7
97-6275	6	X32-401131	4,5,6	X98-100386	1
97-6299	4	X32-401171	4,6	.	
97-6325	6	X32-401371	5	Y11-2202	5
97-6327	4	X32-501831	5		
97-6362	7	X32-501832	6		
97-6363	6	X32-502110	6		
96-6390	5	X32-502120	3		
97-7270	2, 2A	X32-502311	4		
97-7275	1	X32-502625	4		
97-7276	5	X32-502630	3,6		
97-7290	4	X32-502631	6		
97-7462	5	X32-503120	5		
97-8106	6				
		X71-1138	2		
X10-170187	2, 2A	X71-1153	2A		
X11-140157	1,3	X91-141312	5		
X11-140158	4,7	X91-142511	7		
X11-140162	7	X91-142513	5		
X11-170158	6	X91-142514	7		
X11-170208	1,4	X91-143002	6		
X11-170257	2, 2A, 6	X91-143004	6		
X11-170357	6	X91-143009	5		
X11-200307	3,5	X91-143011	5		
X14-140157	1	X91-143505	2, 2A		
X14-140308	3	X91-143512	1		
X14-170227	2, 2A, 3	X91-172174	3		
X14-170308	3,4	X91-173131	6		
X14-170357	2, 2A, 3	X91-173149	5		
X14-200307	3,5	X91-173450	2, 2A		
		X91-173520	3,5		
X15-170206	2	X91-173527	3		
		X91-173563	6		
X16-170256	1	X91-202447	5		
X16-170358	4	X91-203322	5		
X16-200228	3	X91-203505	2, 2A, 5		
X16-200307	5	X91-233432	6		
X16-200357	5	X91-263449	5		
X16-200358	4				
		X96-141174	4		
X18-170208	3	X96-142174	4		
X18-170226	1	X96-172007	6		
X18-170258	3,4	X96-172056	5		
X18-170308	4	X96-172174	3		
X18-170357	5	X96-172197	6		
X18-200357	6				
X18-200408	1	X98-010385	4		
		X98-010396	7		

CANON REPAIR MANUAL

SHUTTER for CANONET QL 17
(Start on the body number 360000 and after)
(REF. NO. 1-30761)


CANON CAMERA CO., INC.
TOKYO, JAPAN

EXPLODED VIEW

of

SHUTTER for CANONET QL 17

(Start on the body number 360000 and after)

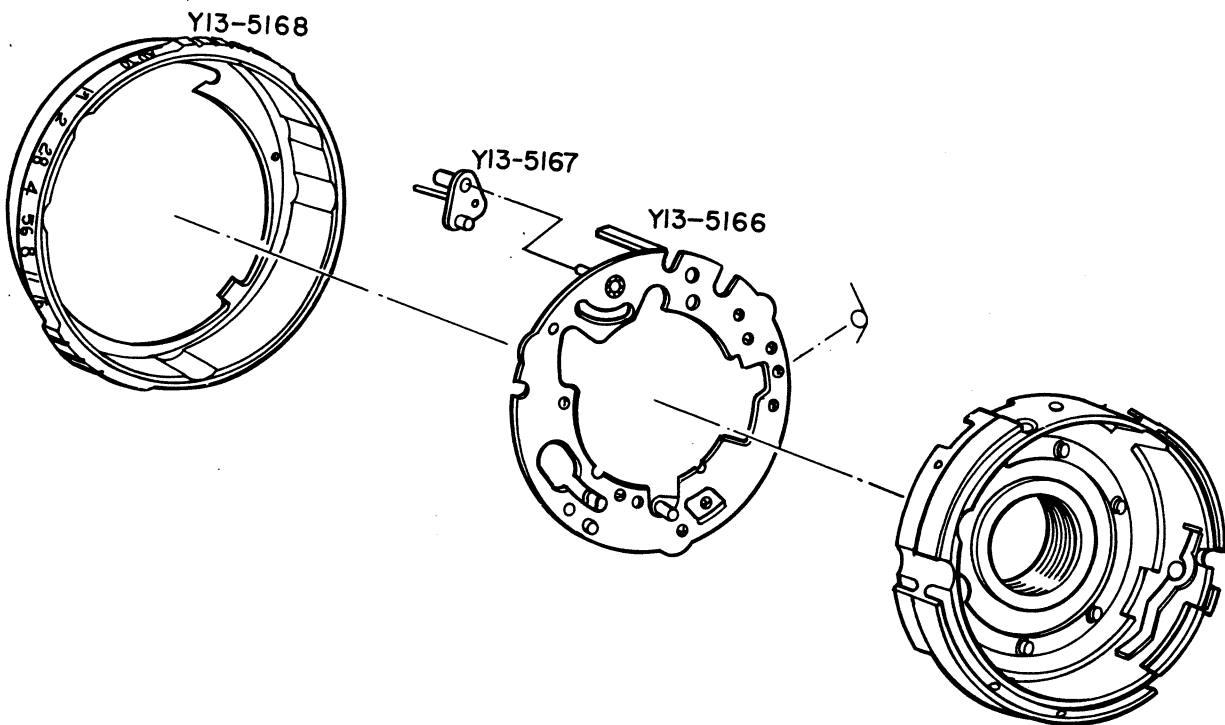

PARTS LIST

Y13-5166	Rear Cover Plate
Y13-5167	Automatic Diaphragm Lever
Y13-5168	Aperture Scale Ring

CANON REPAIR MANUAL

EXPOSURE METER & SHUTTER

for

CANONET QL 1.7

(REFERENCE NO. 1-30761)

CANONET QL 1.9

(REFERENCE NO. 1-30771)

CANONET QL 2.5

(REFERENCE NO. 1-30781)

CANON CAMERA COMPANY INC.


TOKYO, JAPAN

EXPLODED VIEW
of
EXPOSURE METER for CANONET QL 1.7, 1.9, 2.5

REF. NO. 1-30761

REF. NO. 1-30771

REF. NO. 1-30781

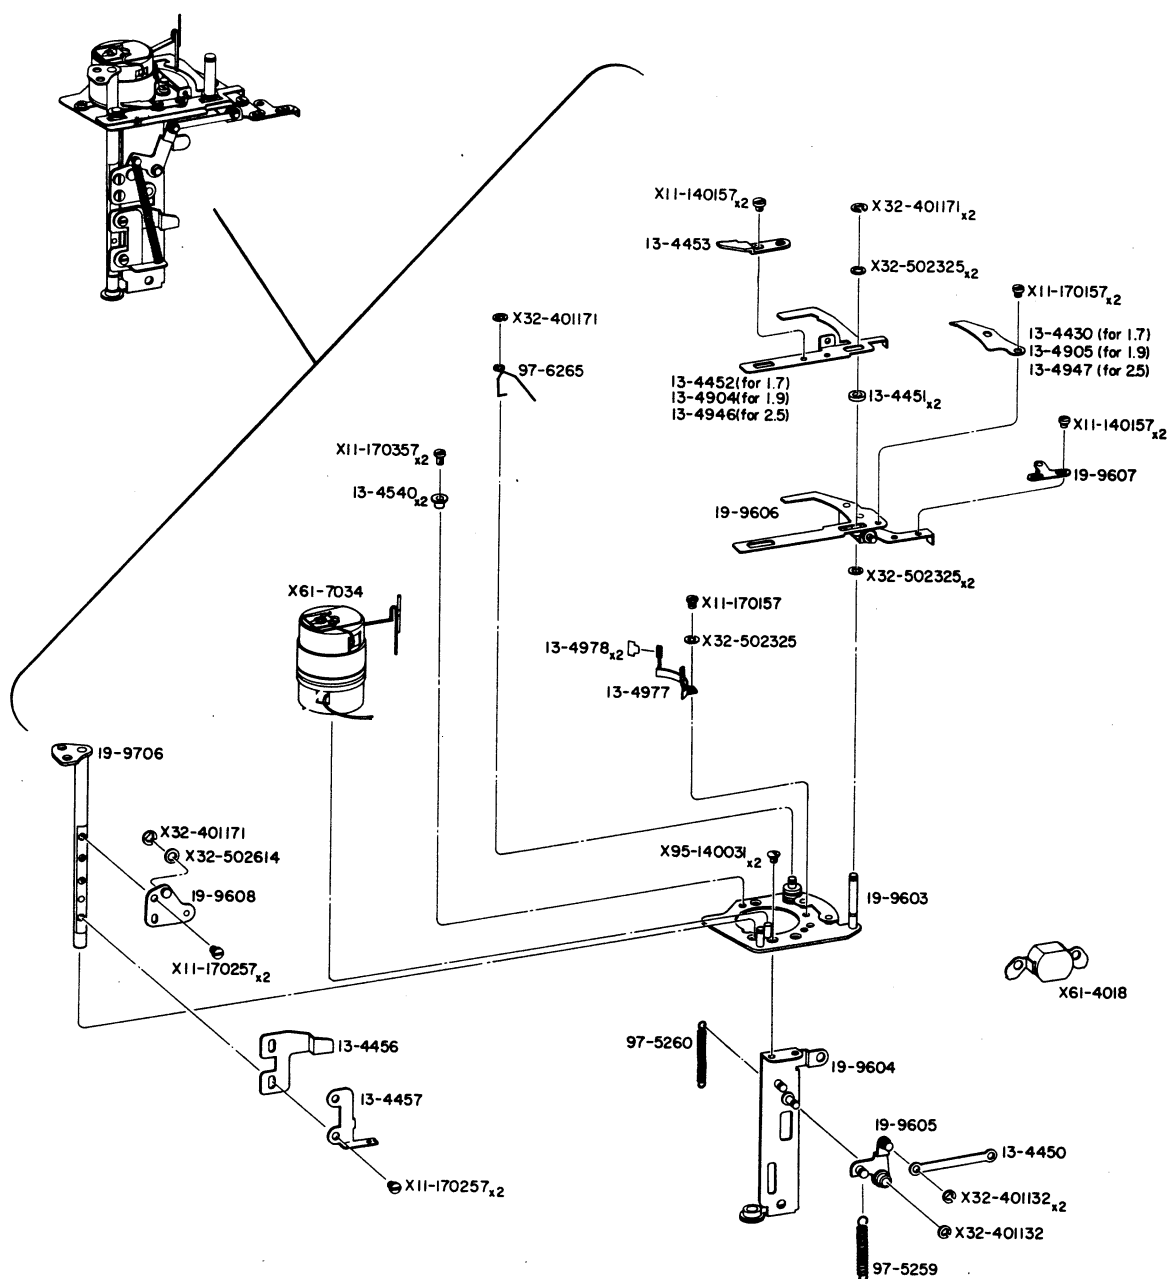

REF. NO. 1-30761

REF. NO. 1-30771


REF. NO. 1-30781

1

PARTS LIST

13-4430	Meter Cam (for 1.7)
13-4450	Connecting Rod
13-4451	Collar x 2
13-4452	Clamp (for 1.7)
13-4453	Shutter Stopper
13-4456	Release Plate
13-4457	Spring Hanger
13-4540	Meter Holder
13-4904	Clamp (for 1.9)
13-4905	Meter Cam (for 1.9)
13-4946	Clamp (for 2.5)
13-4947	Meter Cam (for 2.5)
13-4977	Needle Stopper Holder
13-4978	Needle Stopper x 2
19-9603	Meter Base (B.P.)
19-9604	Meter Front Panel (B.P.)
19-9605	Diaphragm Lever (B.P.)
19-9606	Slide Lever (B.P.)
19-9607	Diaphragm Pin (B.P.)
19-9608	Shutter Shaft Guide (B.P.)
19-9706	Shutter Shaft (B.P.)
97-5259	Coil Spring
97-5260	Coil Spring
97-6265	Spring
X11-140157	Screw x 4
X11-170157	Screw x 3
X11-170257	Screw x 4
X11-170357	Screw x 2
X32-401132	Retaining Washer x 3
X32-401171	Retaining Washer x 4
X32-502325	Washer x 5
X32-502614	Washer
X61-4018	CdS
X61-7034	Galvanometer
X95-140031	Screw x 2


of
SHUTTER for CANONET QL 1.7

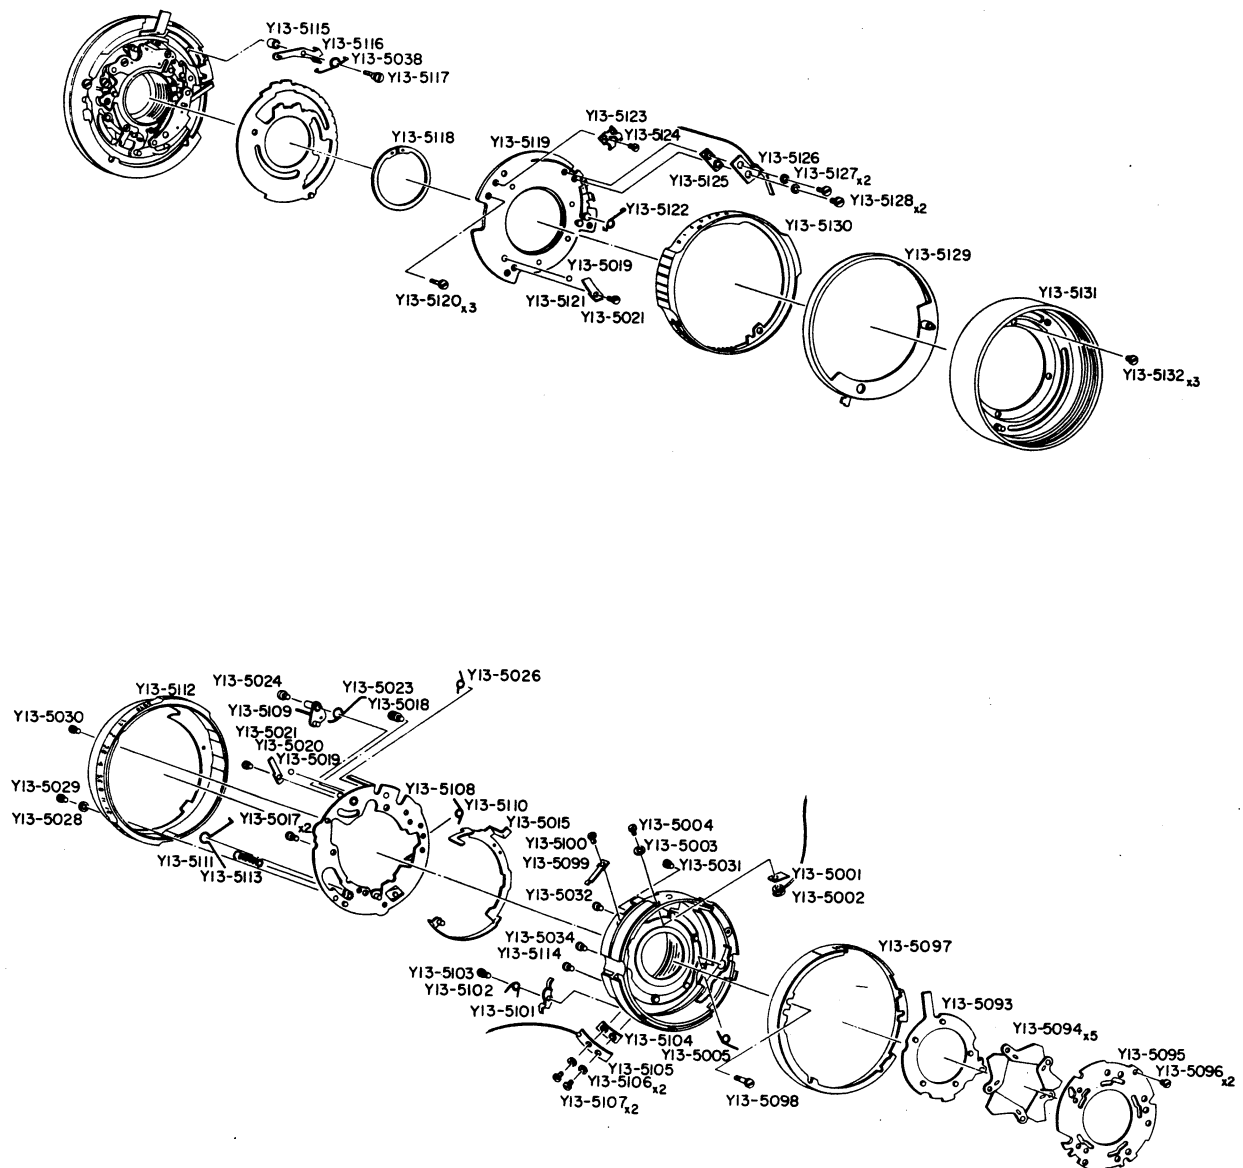

PARTS LIST

Y13-5001	Insulator Sheet	Y13-5115	Spacer
Y13-5002	Flash Lead Wire	Y13-5116	Lock Lever
Y13-5003	Insulator Bush	Y13-5117	Screw
Y13-5004	Screw	Y13-5118	Snap Ring
Y13-5005	Spring	Y13-5119	Front Panel
Y13-5015	Contact Change Ring	Y13-5120	Screw x 3
Y13-5017	Screw x 2	Y13-5121	Click Plate
Y13-5018	Screw	Y13-5122	Spring
Y13-5019	Steel Ball x 2	Y13-5123	Lead Wire Holder
Y13-5020	Click Spring x 2	Y13-5124	Screw
Y13-5021	Screw	Y13-5125	Insulator
Y13-5023	Spring	Y13-5126	Contact
Y13-5024	Screw	Y13-5127	Insulator x 2
Y13-5026	Spring	Y13-5128	Screw x 2
Y13-5028	Washer	Y13-5129	ASA Cam Ring
Y13-5029	Screw	Y13-5130	Shutter Speed Ring
Y13-5030(1.8)	Adjusting Screw	Y13-5131	Hood Ring
Y13-5030(1.9)	Such number(1.8), (1.9) and(2.6)indicate diame- ter of Adjusting Screw. There are some 9 kind of screw begins with diame- ter 1.8 ϕ increase 0.1 ϕ	Y13-5132	Screw x 3
Y13-5030(2.5)	each ends 2.6 ϕ (Unit: ϕ)		
Y13-5030(2.6)			
Y13-5031	Screw		
Y13-5032	Screw		
Y13-5034	Screw		
Y13-5038	Spring		
Y13-5093	Diaphragm Control Ring		
Y13-5094	Diaphragm Blade x 5		
Y13-5095	Shutter Blade Retaining Plate		
Y13-5096	Screw		
Y13-5097	Marking Ring		
Y13-5098	Screw		
Y13-5099	Click Plate		
Y13-5100	Screw		
Y13-5101	Contact		
Y13-5102	Spring		
Y13-5103	Screw		
Y13-5104	Insulator		
Y13-5105	Contact		
Y13-5106	Insulator x 2		
Y13-5107	Screw x 2		
Y13-5108	Rear Cover Plate		
Y13-5109	Automatic Diaphragm Lever		
Y13-5110	Spring		
Y13-5111	Spring		
Y13-5112	Aperture Scale Ring		
Y13-5113	Spring		
Y13-5114	Screw		

of
SHUTTER for CANONET QL 1.9

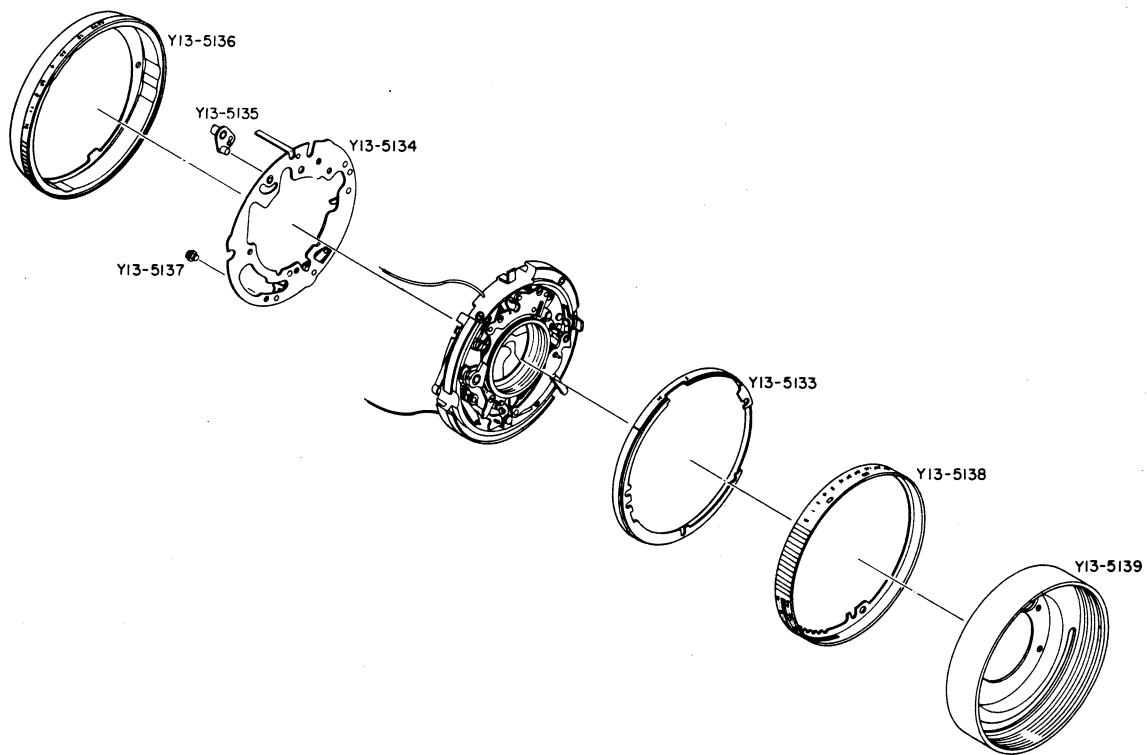

PARTS LIST

Y13-5133	Marking Ring
Y13-5134	Rear Cover Plate
Y13-5135	Automatic Diaphragm Lever
Y13-5136	Aperture Scale Ring
Y13-5137	Screw
Y13-5138	Shutter Speed Ring
Y13-5139	Hood Ring

REF. NO. 1-30761

REF. NO. 1-30771

REF. NO. 1-30781

INDEX OF PARTS NUMBER


PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
13-4430	1	Y13-5019	2	Y13-5130	2
13-4450	1	Y13-5020	2	Y13-5131	2
13-4451	1	Y13-5021	2	Y13-5132	2
13-4452	1	Y13-5023	2	Y13-5133	3
13-4453	1	Y13-5024	2	Y13-5134	3
13-4456	1	Y13-5026	2	Y13-5135	3
13-4457	1	Y13-5028	2	Y13-5136	3
13-4540	1	Y13-5029	2	Y13-5137	3
13-4904	1	Y13-5030	2	Y13-5138	3
13-4905	1	Y13-5031	2	Y13-5139	3
13-4946	1	Y13-5032	2		
13-4947	1	Y13-5034	2		
13-4977	1	Y13-5038	2		
13-4978	1	Y13-5093	2		
		Y13-5094	2		
19-9603	1	Y13-5095	2		
19-9604	1	Y13-5096	2		
19-9605	1	Y13-5097	2		
19-9606	1	Y13-5098	2		
19-9607	1	Y13-5099	2		
19-9608	1	Y13-5100	2		
19-9706	1	Y13-5101	2		
		Y13-5102	2		
97-5259	1	Y13-5103	2		
97-5260	1	Y13-5104	2		
97-6265	1	Y13-5105	2		
		Y13-5106	2		
X11-140157	1	Y13-5107	2		
X11-170157	1	Y13-5108			
X11-170257	1	Y13-5109	2		
X11-170357	1	Y13-5110	2		
		Y13-5111	2		
X32-401132	1	Y13-5112	2		
X32-401171	1	Y13-5113	2		
X32-502325	1	Y13-5114	2		
X32-502614	1	Y13-5115	2		
		Y13-5116	2		
X61-4018	1	Y13-5117	2		
X61-7034	1	Y13-5118	2		
		Y13-5119	2		
X95-140031	1	Y13-5120	2		
		Y13-5121	2		
Y13-5001	2	Y13-5122	2		
Y13-5002	2	Y13-5123	2		
Y13-5003	2	Y13-5124	2		
Y13-5004	2	Y13-5125	2		
Y13-5005	2	Y13-5126	2		
Y13-5015	2	Y13-5127	2		
Y13-5017	2	Y13-5128	2		
Y13-5018	2	Y13-5129	2		

CANON REPAIR MANUAL

CANON CANONET QL 19
(REF. NO. 1-30771)

CANON INC. JAPAN

EXPLODED VIEW
of
CANON CANONET QL 19

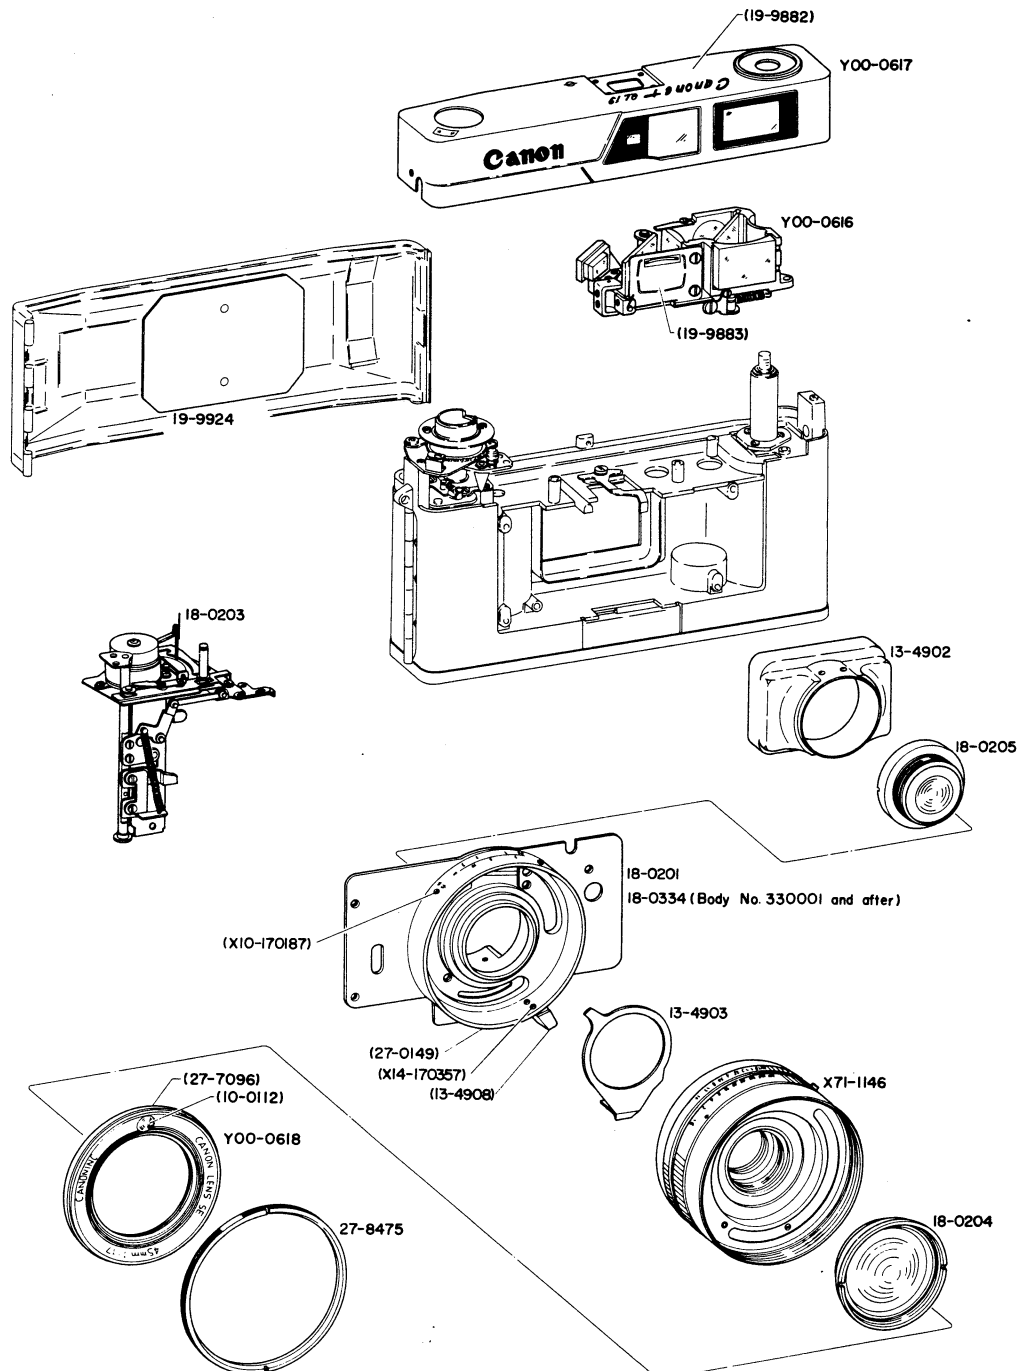

Canonet QL 19 is absolutely the same product in mechanism as Canonet QL17 is, we therefore picked up only parts which are used in the Canonet QL19 for this repair manual. The rest of the parts as Canonet QL19's, incase if necessary, refer to the repair manual of Canonet QL 17.

PARTS LIST

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ファインダーユニット	D	Y00-0616	1	Range Viewfinder
上 部 カ バ ー	C	Y00-0617	1	Top Cover Unit
前 枠	D	Y00-0618	1	Name Ring
フ レ ネ ル レ ン ズ	E	10-0112	1	Fresnel Lens
遮 光 筒	E	13-4902	1	Light Shield
チ ャ ー ジ リ ン グ	E	13-4903	1	Shutter Charge Ring
距 離 環 つ ま み	E	13-4908	1	Focusing Knob
前 板 ユ ニ ッ ト	D	18-0201	1	Front Panel
メ ー タ ー ユ ニ ッ ト	C	18-0203	1	Meter Unit
前 玉 ユ ニ ッ ト	C	18-0204	1	Front Lens Unit
後 玉 ユ ニ ッ ト	C	18-0205	1	Rear Lens Unit
前 板 ユ ニ ッ ト	D	18-0334	1	Front Panel
上 部 カ バ ー	C	19-9882	1	Top Cover
マ ス ク	D	19-9883	1	Finder Mask
圧 着 板	D	19-9924	1	Pressure Plate
距 離 環	E	27-0149	1	Focusing Ring
前 枠	E	27-7096	1	Name Ring
押 え 環	D	27-8475	1	Assembly Collar
止 め ビ ス		X10-170187	3	Screw
皿 ビ ス		X14-170357	2	Screw
シ ャ ッ タ ー		X71-1146	1	Shutter

First Printing, April 1965

Revised Printing, May 1971


CANON REPAIR MANUAL

CANON CANONET QL 25

(REFERENCE NO. 1-30781)

**CANON CAMERA COMPANY, INC,
TOKYO, JAPAN**

EXPLODED VIEW
of
CANON CANONET QL 25

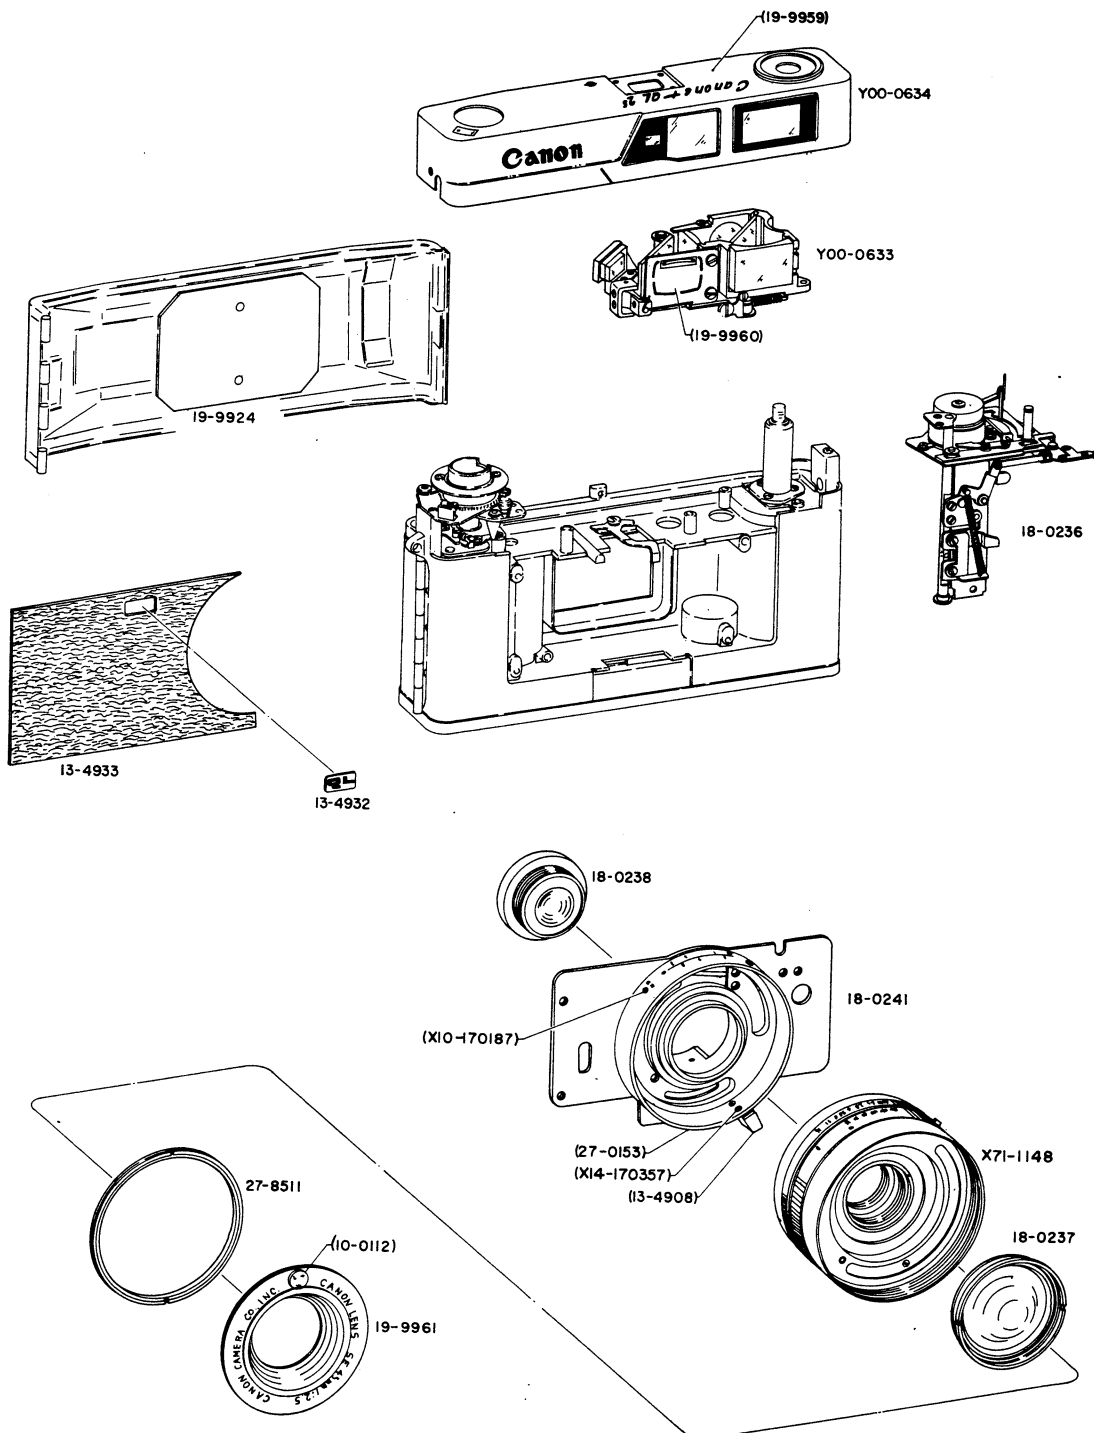

Canonet QL 25 is absolutely the same product in mechanism as Canonet QL 17 is, we therefor picked up only parts which are used in the Canonet QL 25 for this repair manual. The rest of the parts as Canonet QL 25's, in case if necessary, refer to the repair manual of Canonet QL 17 (1-30761).

PARTS LIST

Y00-0633 Range-Viewfinder(Unit)
 19-9960 Finder Mask(B.P.)
Y00-0634 Top Cover(B.P.)
n. b. The parts number for Bell & Howell Co. is Y00-0636
 19-9959 Top Cover(B.P.)
 n. b. The parts number for Bell & Howell Co. is 19-9962
13-4932 Name Plate
13-4933 Leather
18-0236 Exposure Meter(Unit)
18-0237 Front Lens(Unit)
18-0238 Rear Lens(Unit)
18-0241 Front Panel(Unit)
 13-4908 Focusing Knob
 27-0153 Focusing Ring
19-9924 Pressure Plate(B.P.)
19-9961 Name Ring(B.P.)
X71-1148 Shutter Unit


n. b. Reference number of Canonet QL 25 for Bell & Howell Co. is 1-30783.

CANON REPAIR MANUAL

SHUTTER for CANONET QL 25 **(REF. NO. 1-30781)**

CANON CAMERA CO., INC.
TOKYO, JAPAN

EXPLODED VIEW
of
SHUTTER for CANONET QL 25

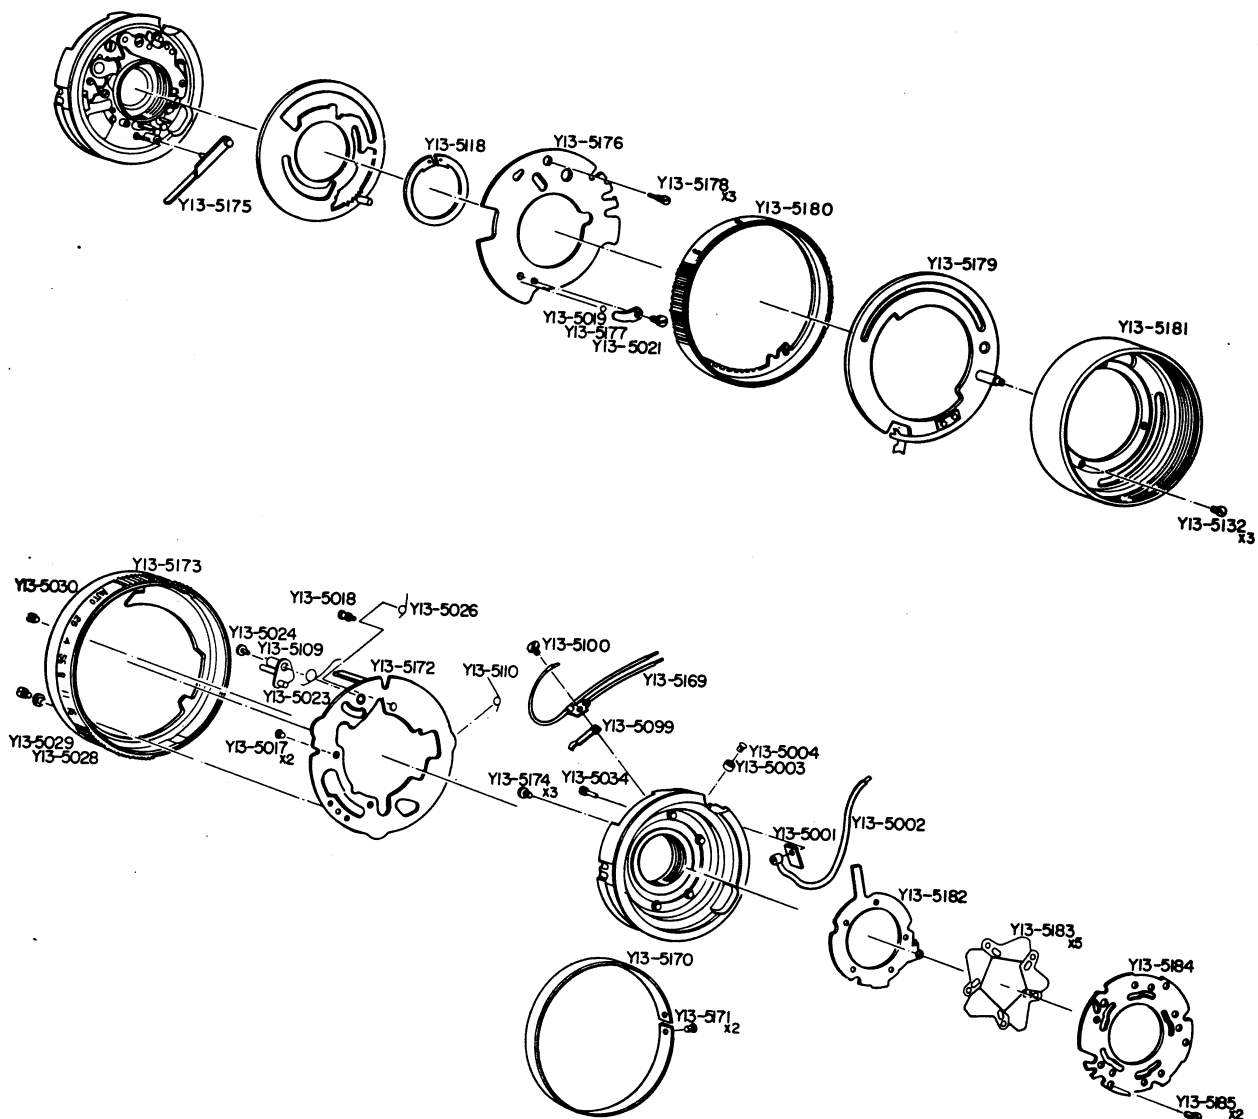

PARTS LIST

Y13-5001	Insulator Sheet
Y13-5002	Flash Lead Wire
Y13-5003	Insulator Bush
Y13-5004	Screw
Y13-5017	Screw x 2
Y13-5018	Screw
Y13-5019	Steel Ball x 2
Y13-5021	Screw
Y13-5023	Spring
Y13-5024	Screw
Y13-5026	Spring
Y13-5028	Washer
Y13-5029	Screw
Y13-5030(1.8)	Adjusting Screw
Y13-5030(1.9)	Such number (1.8), (1.9) and (2.6) indicate diameter of Adjusting Screw.
	There are some 9 kind of screw begins with diameter 1.8φ increase 0.1φ each ends 2.6φ (Unit : φ)
Y13-5030(2.5)	
Y13-5030(2.6)	
Y13-5034	Screw
Y13-5099	Click Plate
Y13-5100	Screw
Y13-5109	Automatic Diaphragm Lever
Y13-5110	Spring
Y13-5118	Snap Ring
Y13-5132	Screw x 3
Y13-5169	Contact
Y13-5170	Marking Plate
Y13-5171	Screw x 2
Y13-5172	Rear Cover Plate
Y13-5173	Aperture Scale Ring
Y13-5174	Screw x 3
Y13-5175	Click Spring
Y13-5176	Front Panel
Y13-5177	Click Spring
Y13-5178	Screw x 3
Y13-5179	Film Speed Cam Ring
Y13-5180	Shutter Speed Ring
Y13-5181	Hood Ring
Y13-5182	Diaphragm Control Ring
Y13-5183	Diaphragm Blade x 5
Y13-5184	Shutter Blade Retaining Plate
Y13-5185	Screw x 2

CANON REPAIR MANUAL


CANON NEW CANONET QL 17
(REF. NO. 1-30801)

CANON INC. JAPAN

CONTENTS

	Page
TOP COVER 上部カバー	1
BASE COVER 下部カバー	1
BACK COVER 裏 ぶ た	1
FRONT PANER 前 板	2
LENS レンズ	2
SHUTTER シャッター	2
WINDING BASE 巻上げ地板	3, 4
VIEW FINDER 距 離 計	4
FILM COUNTER フィルムカウンター	5
TAKE UP SPOOL 巻取リスプール	5
WINDING SHAFT 巻 上 げ 軸	5
CIRCUIT DIAGRAM 配 線 図	6
INDEX OF PARTS NUMBERS 索 引	

EXPLODED VIEW
of
CANON NEW CANONET QL 17

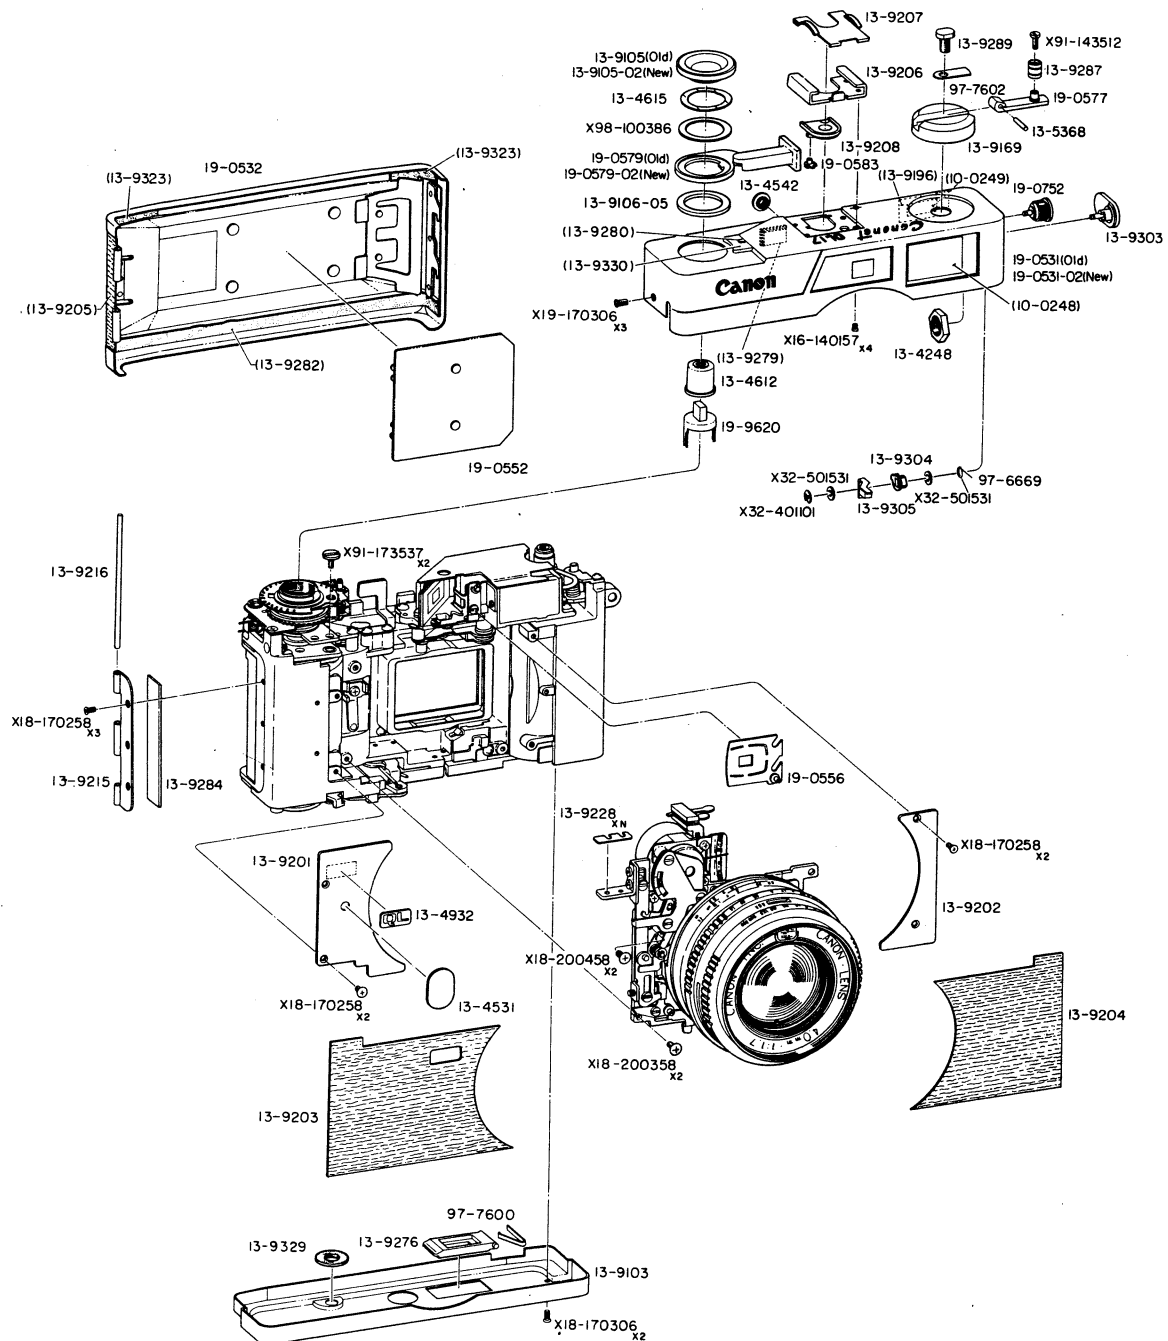


PARTS LIST

TOP COVER & BASE COVER & BACK COVER

上部カバー	下部カバー	裏ぶた				
部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION		
前 面 ガ ラ ス	B	10-0248	1	Front Glass		
接 眼 レ ン ズ	B	10-0249	1	Eyepiece Lens		
ナ ッ ト	E	13-4248	1	Nut		
キ ャ ッ プ	C	13-4531	1	Cap		
キ ャ ッ プ	D	13-4542	1	Cap		
シ ャ ッ タ ー ボ タ ン	D	13-4612	1	Shutter Button		
ワ ッ シ ャ ー	D	13-4615	1	Washer		
Q L マ ー ク	D	13-4932	1	QL Mark		
ピ ン	C	13-5368	1	Pin		
下 部 カ バ ー	C	13-9103	1	Base Cover		
ボ タ ン リ ン グ	C	13-9105	1	Shutter Button Guard		
ワ ッ シ ャ ー	D	13-9106	1	Washer		
巻 戻 し ノ ブ	C	13-9169	1	Rewind Knob		
接 眼 レ ン ズ 枠	C	13-9196	1	Eyepiece Lens Frame		
前 カ バ ー	C	13-9201	1	Front Cover		
前 カ バ ー	C	13-9202	1	Front Cover		
レ ザ ー	A	13-9203	1	Leather		
レ ザ ー	A	13-9204	1	Leather		
レ ザ ー	B	13-9205	1	Leather		
ア ク セ サ リ ー シ ュ ー	B	13-9206	1	Accessory Shoe		
ア ク セ サ リ ー シ ュ カ バ ー	B	13-9207	1	Accessory Shoe Cover		
直 結 シ ン ク ロ タ ー ミ ナ ル	C	13-9208	1	Connect Flash Terminal		
蝶 番	D	13-9215	1	Hinge		
蝶 番 軸	D	13-9216	1	Shaft of Hinge		
調 整 ワ ッ シ ャ ー	A	13-9228 (0.2) 13-9228 (0.3)	N	Adjusting Washer		
() 内の数字は厚さを示す。 (単位: mm)				Parenthesized numbers indicate thickness (Unit: mm)		
水 銀 電 池 ぶ た	C	13-9276	1	Battery Cover		
フ ィ ル ム 送 り 指 標 窓	C	13-9279	1	Film Feed Index Window		
カ ウ ン タ ー 窓	C	13-9280	1	Counter Window		
モ ル ト ブ レ ー ン	C	13-9282	1	Light Shield		
テ レ ン プ	D	13-9284	1	Light Shield		
ク ラ ン ク 座	C	13-9287	1	Rewind Crank Head		
ビ ス	C	13-9289	1	Screw		
シ ン ク ロ タ ー ミ ナ ル カ バ ー	C	13-9303	1	Flash Terminal Cover		
カ ム	C	13-9304	1	Cam		
接 片	C	13-9305	1	Contact		
モ ル ト ブ レ ー ン	E	13-9323	2	Light Shield		
モ ル ト ブ レ ー ン	C	13-9329	1	Light Shield		
カ ウ ン タ ー 窓 枠	D	13-9330	1	Counter Window Frame		
上 部 カ バ ー	C	19-0531	1	Top Cover		
裏 ぶ た	D	19-0532	1	Back Cover		
圧 板	C	19-0552	1	Pressure Plate		
フ ァ イ ン ダ ー マ ス ク	C	19-0556	1	Finder Mask		
巻 戻 し ク ラ ン ク	D	19-0577	1	Rewind Crank		
巻 上 げ レ バ ー	C	19-0579	1	Winding Lever		
接 片	D	19-0583	1	Contact		
シ ン ク ロ タ ー ミ ナ ル	D	19-0752	1	Flash Terminal		
シ ャ ッ タ ー ボ タ ン 座	D	19-9620	1	Shutter Button Base		
ス プ リ ン グ	D	97-6669	1	Spring		

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION	
板 ス プ リ ン グ	D	97-7600	1	Plate Spring	
板 ス プ リ ン グ	D	97-7602	1	Plate Spring	
十 字 ナ ベ ビ ス		X16-140157	4	Screw	
十 字 皿 ビ ス		X18-170258	7	Screw	
十 字 皿 ビ ス		X18-170306	2	Screw	
十 字 皿 ビ ス		X18-200358	2	Screw	
十 字 皿 ビ ス		X18-200458	2	Screw	
十 字 丸 皿 ビ ス		X19-170306	3	Screw	
緊 定 ワ ッ シ ャ ー		X32-401101	1	Retaining Washer	
ワ ッ シ ャ ー		X32-501531	2	Washer	
平 ビ ス		X91-143512	1	Screw	
平 ビ ス		X91-173537	2	Screw	
ワ ッ シ ャ ー		X98-100386	1	Washer	

EXPLODED VIEW
of
CANON NEW CANONET QL 17

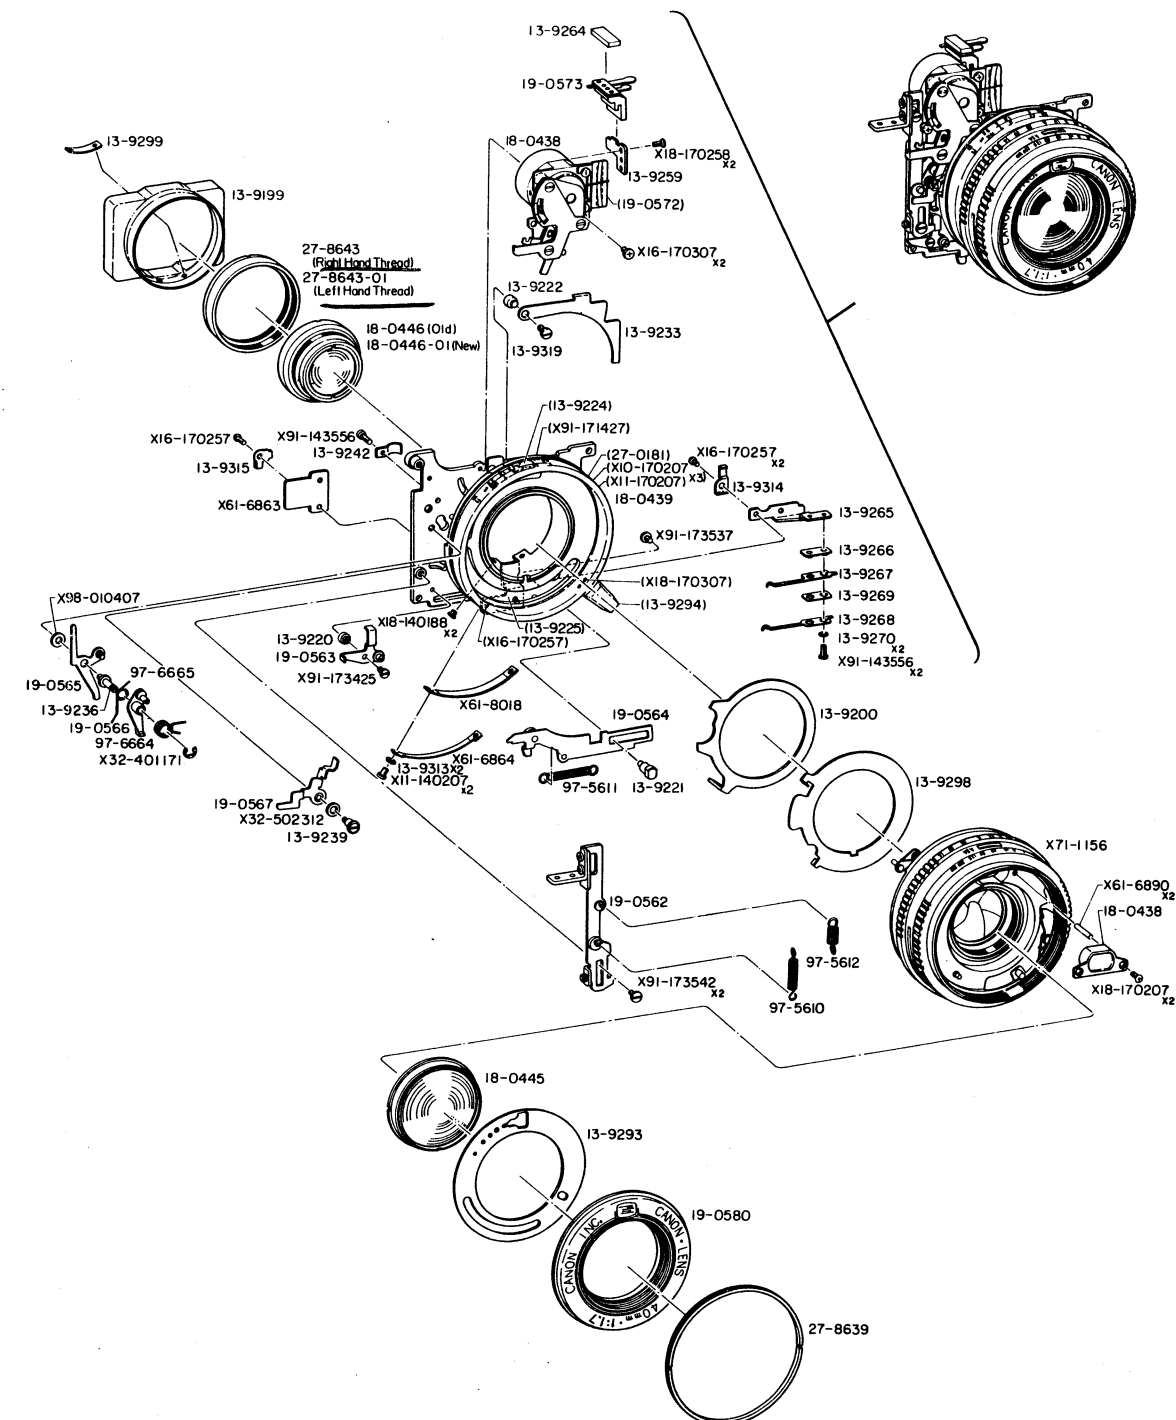


PARTS LIST

FRONT PANEL & LENS UNIT & SHUTTER

前 板			レンズユニット		シャッター	
部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION		
遮 光 筒	D	13-9199	1	Light Shield		
チャージリング	C	13-9200	1	Charge Ring		
カラ	D	13-9220	1	Collar		
ナ ッ ト	D	13-9221	1	Nut		
カラ	D	13-9222	1	Collar		
直 進 キ	C	13-9224	1	Key		
直 進 キ	E	13-9225	1	Key		
バラックス調整レバー	E	13-9233	1	Parallax Adjusting Cover		
ロックレバー軸	D	13-9236	1	Shaft		
リリースレバー軸	D	13-9239	1	Shaft		
コード押え	D	13-9242	1	Cord Holder		
接片支持板	D	13-9259	1	Contact Supporter		
モルトブレーン	C	13-9264	1	Contact Holder		
接片ホルダー	E	13-9265	1	Contact Holder		
接片地板	D	13-9266	1	Contact Base		
接片	D	13-9267	1	Contact		
接片	D	13-9268	1	Contact		
絶縁板	D	13-9269	1	Insulator		
絶縁板	D	13-9270	2	Insulator		
紋リ板	D	13-9293	1	Diaphragm Plate		
距離つまみ	E	13-9294	1	Facusing Knob		
チャージリング座	E	13-9298	1	Intermediate Ring		
ナ ッ ト	C	13-9299	1	Nut		
ワッシャー	C	13-9313	2	Washer		
コード押え	D	13-9314	1	Cord Holder		
コード押え	D	13-9315	1	Cord Holder		
ビス	C	13-9319	1	Screw		
メーターユニット	C	18-0438	1	Exposure Meter Unit		
前板ユニット	D	18-0439	1	Front Panel Unit		
前玉ユニット	C	18-0445	1	Front Lens Unit		
後玉ユニット	C	18-0446	1	Rear Lens Unit		
シャッターリリースレバー	D	19-0562	1	Shutter Release Lever		
巻止め外し	D	19-0563	1	Stopper Remove Lever		
シャッターチャージレバー	D	19-0564	1	Shutter Charge Lever		
巻止め外し	D	19-0565	1	Stopper Remove Lever		
シャッターロックレバー	D	19-0566	1	Shutter Lock Lever		
シャッターチャージレバー	D	19-0567	1	Shutter Release Lever		
紋リ目盛板	D	19-0572	1	Aperture Scale Plate		
接片	D	19-0573	1	Contact		
ネーム環	C	19-0580	1	Name Ring		
距離環	E	27-0181	1	Focusing Ring		
押え環	D	27-8639	1	Assembly Collar		
押え環	D	27-8643	1	Assembly Collar		
コイルスプリング	D	97-5610	1	Coil Spring		
コイルスプリング	D	97-5611	1	Coil Spring		
コイルスプリング	D	97-5612	1	Coil Spring		
スプリング	D	97-6664	1	Spring		
スプリング	D	97-6665	1	Spring		
止めビス		X10-170207	3	Screw		
平ビス		X11-140207	2	Screw		

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION	
平ビス		X11-170207	1	Screw	
十字ナベビス		X16-170257	4	Screw	
十字ナベビス		X16-170307	2	Screw	
十字皿ビス		X18-140188	2	Screw	
十字皿ビス		X18-170207	2	Screw	
十字皿ビス		X18-170258	2	Screw	
十字皿ビス		X18-170307	1	Screw	
緊定ワッシャー		X32-401171	1	Retaining Washer	
ワッシャー		X32-502312	1	Washer	
プリント板	E	X61-6863	1	Print Circuit Plate	
プリント板	E	X61-6864	1	Print Circuit Plate	
ビニールチューブ	E	X61-6890	2	Vynil Tube	
カーボン抵抗	E	X61-8018	1	Resistor	
シャッター	C	X71-1156	1	Shutter	
平ビス		X91-143556	3	Screw	
平ビス		X91-171427	1	Screw	
平ビス		X91-173425	1	Screw	
平ビス		X91-173537	1	Screw	
平ビス		X91-173542	2	Screw	
ワッシャー		X98-010407	1	Washer	

EXPLODED VIEW
of
CANON NEW CANONET QL 17

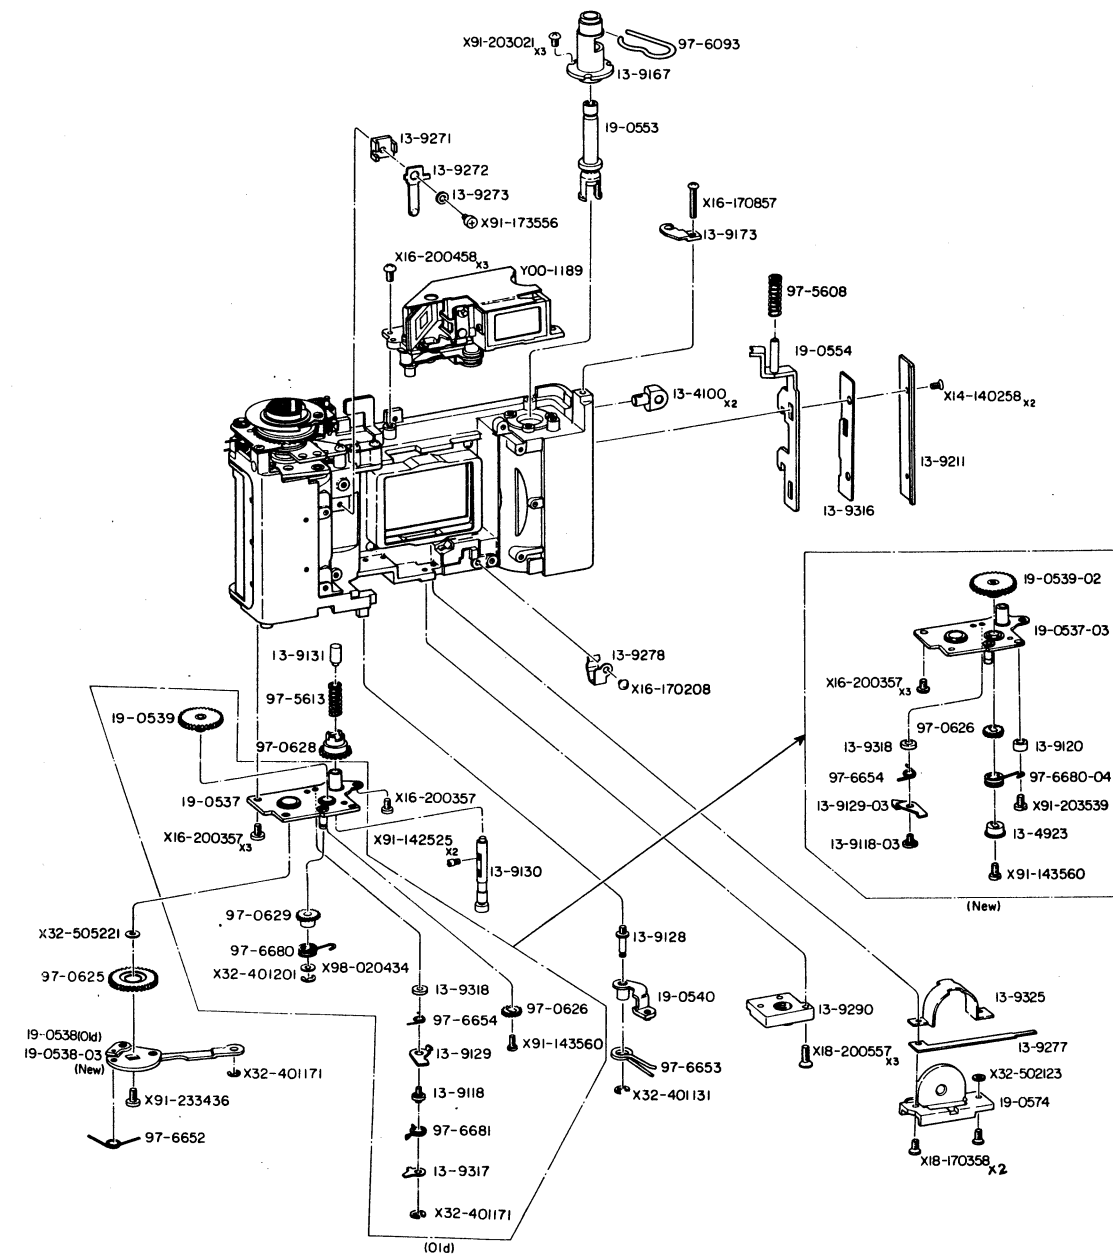

PARTS LIST


WINDING BASE & VIEWFINDER UNIT

巻上げ地板 距離計

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ファインダーユニット	D	Y00-1189	1	View Finder Unit
吊 環	D	13-4100	2	Neck Strap Catch
カ ラ ー	D	13-4923	1	Collar
ス タ ッ ド	D	13-9118	1	Stud
カ ラ ー	C	13-9120	1	Collar
チャージスプリング軸	D	13-9128	1	Charge Spring Shaft
ラチェットレバー	D	13-9129	1	Ratchet Lever
R ボ タ ン	D	13-9130	1	Rewind Button
バ ネ 受 け	E	13-9131	1	Spring Catcher
巻 戻 し メ タ ル	C	13-9167	1	Rewind Metal
軸 受 け	D	13-9173	1	Shaft Holder
ロックレバーカバー	C	13-9211	1	Lock Lever Cover
接 片 地 板	E	13-9271	1	Contact Base
接 片	D	13-9272	1	Contact
絶 縁 板	D	13-9273	1	Insulator
水 銀 電 池 外 し	C	13-9277	1	Battery Take Out Plate
水 銀 電 池 接 片	D	13-9278	1	Battery Contact
三 却 取 付 け ネ ジ	D	13-9290	1	Tripod Socket
ス ペ ー サ ー	D	13-9316	1	Spacer
ラチェットレバー	D	13-9317	1	Ratchet Lever
ワ ッ シ ャ ー	C	13-9318	1	Washer
遮 光 板	D	13-9325	1	Light Shield
巻 上 げ 地 板	E	19-0537	1	Winding Base
巻 上 げ 爪	D	19-0538	1	Winding Pawl
中 間 ギ ヤ ー	D	19-0539	1	Inner Gear
シャッターチャージレバー	D	19-0540	1	Shutter Charge Lever
巻 戻 し フ ォ ーク	B	19-0553	1	Rewind Fork
ロ ッ ク レ バ ー	D	19-0554	1	Lock Lever
水 銀 電 池 室	D	19-0574	1	Battery Box
巻 上 げ ギ ヤ ー	D	97-0625	1	Winding Gear
アイドルギヤー	D	97-0626	1	Idle Gear
スプロケットギヤー	D	97-0628	1	Sprocket Gear
フリクションギヤー	D	97-0629	1	Friction Gear
コイルスプリング	C	97-5608	1	Coil Spring
コイルスプリング	D	97-5613	1	Coil Spring
ス プ リ ン グ	D	97-6093	1	Spring
ス プ リ ン グ	D	97-6652	1	Spring
ス プ リ ン グ	D	97-6653	1	Spring
ス プ リ ン グ	D	97-6654	1	Spring
ス プ リ ン グ	D	97-6680	1	Spring
ス プ リ ン グ	D	97-6681	1	Spring
皿 ビ ス		X14-140258	2	Screw
十 字 ナ ベ ビ ス		X16-170208	1	Screw
十 字 ナ ベ ビ ス		X16-170857	1	Screw
十 字 ナ ベ ビ ス		X16-200357	4	Screw
十 字 ナ ベ ビ ス		X16-200458	3	Screw
十 字 皿 ビ ス		X18-170358	2	Screw
十 字 皿 ビ ス		X18-200557	3	Screw
緊 定 ワ ッ シ ャ ー		X32-401131	1	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401171	2	Retaining Washer

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
緊 定 ワ ッ シ ャ ー		X32-401201	1	Retaining Washer
ワ ッ シ ャ ー		X32-502123	2	Washer
ワ ッ シ ャ ー		X32-505221	1	Washer
平 ビ ス		X91-142525	2	Screw
平 ビ ス		X91-143560	1	Screw
平 ビ ス		X91-173556	1	Screw
平 ビ ス		X91-203021	3	Screw
平 ビ ス		X91-203539	1	Screw
平 ビ ス		X91-233436	1	Screw
ワ ッ シ ャ ー		X98-020434	1	Washer

EXPLODED VIEW
of
CANON NEW CANONET QL 17

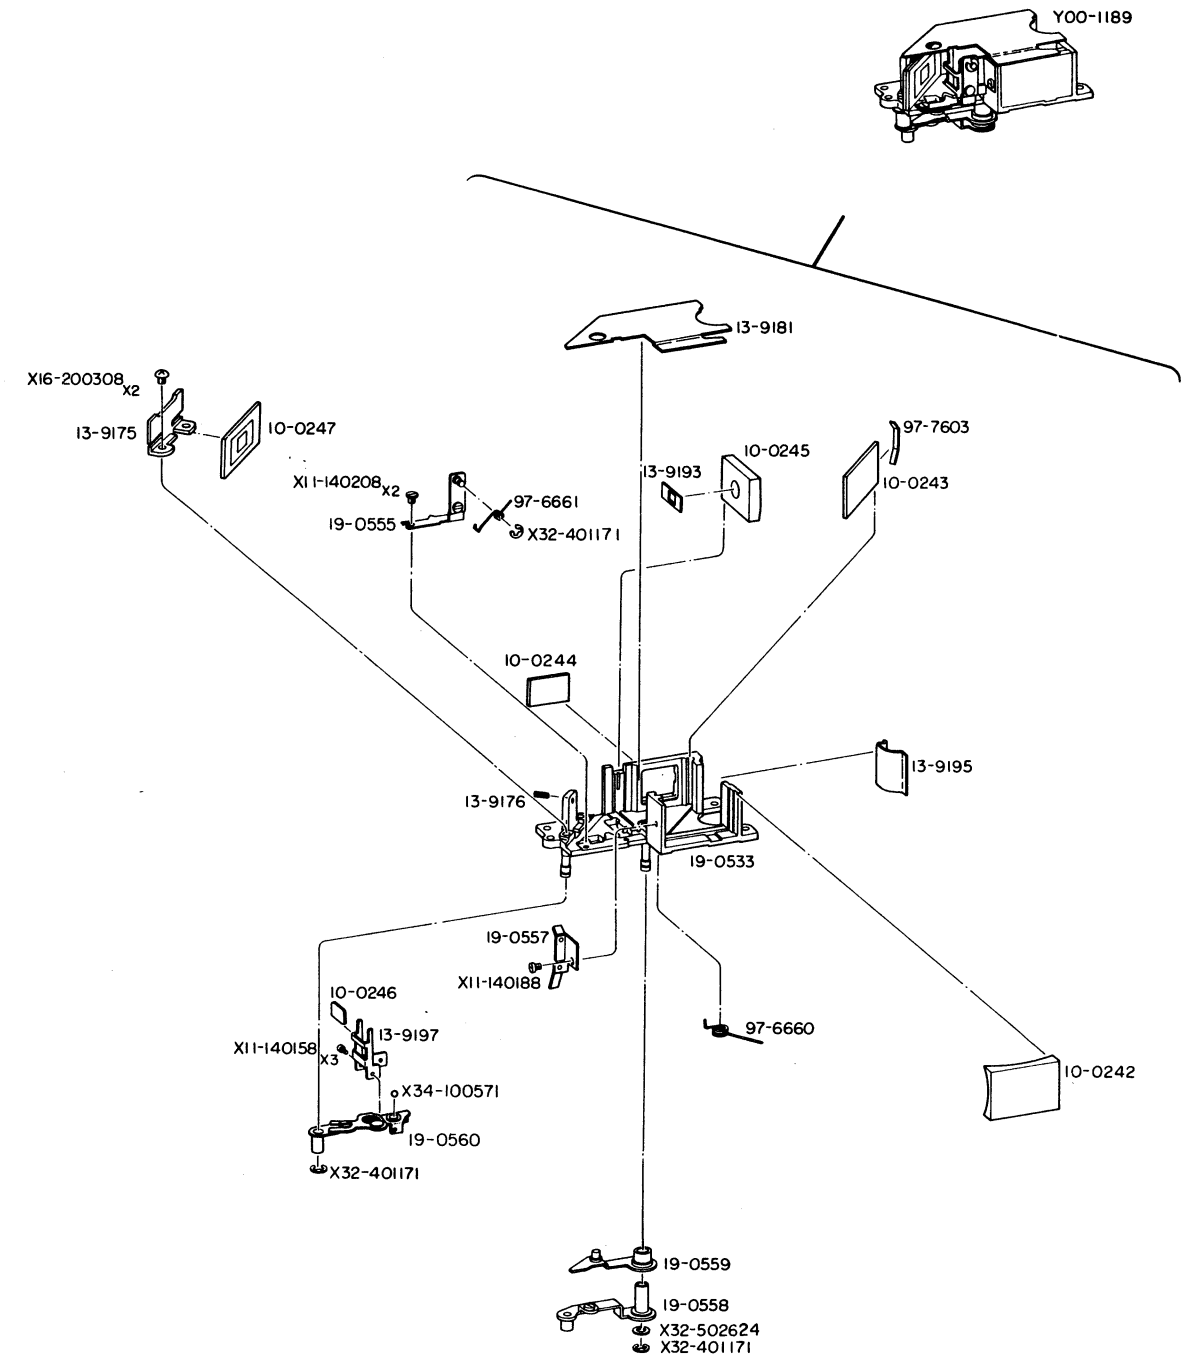


VIEW FINDER

距離計

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ファインダーユニット	D	Y00-1189	1	View Finder Unit
レ ズ	D	10-0242	1	Lens Element
レ ズ	D	10-0243	1	Lens Element
レ ズ	D	10-0244	1	Lens Element
レ ズ	D	10-0245	1	Lens Element
レ ズ	D	10-0246	1	Lens Element
ミ ラ ー	D	10-0247	1	Mirror
ミ ラ ー 地 板	E	13-9175	1	Mirror Base
ビ ス	C	13-9176	1	Screw
ファインダー上カバー	E	13-9181	1	Finder Top Cover
マ ス ク	E	13-9193	1	Mask
ファインダー横カバー	E	13-9195	1	Finder Side Cover
移 動 レ ン ズ 台	E	13-9197	1	Movement Lens Base
ファインダー地板	E	19-0533	1	Finder Box
ファインダーマスクホルダー	D	19-0555	1	Finder Mask Holder
レ ン ズ 押 え	E	19-0557	1	Lens Pressure
連 動 レ バ ー	E	19-0558	1	Connecting Lever
連 動 レ バ ー	E	19-0559	1	Connecting Lever
バ ネ 板	E	19-0560	1	Spring Lever
ス プ リ ン グ	D	97-6660	1	Spring
ス プ リ ン グ	D	97-6661	1	Spring
板 ス プ リ ン グ	D	97-7603	1	Plate Spring
平 ビ ス		X11-140158	3	Screw
平 ビ ス		X11-140188	1	Screw
平 ビ ス		X11-140208	2	Screw
十 字 ナ ベ ビ ス		X16-200308	2	Screw
緊 定 ワ ッ シ ャ ー		X32-401171	3	Retaining Washer
ワ ッ シ ャ ー		X32-502624	1	Washer
ス チ ール ボ ール		X34-100571	1	Steel Ball

EXPLODED VIEW
of
CANON NEW CANONET QL 17

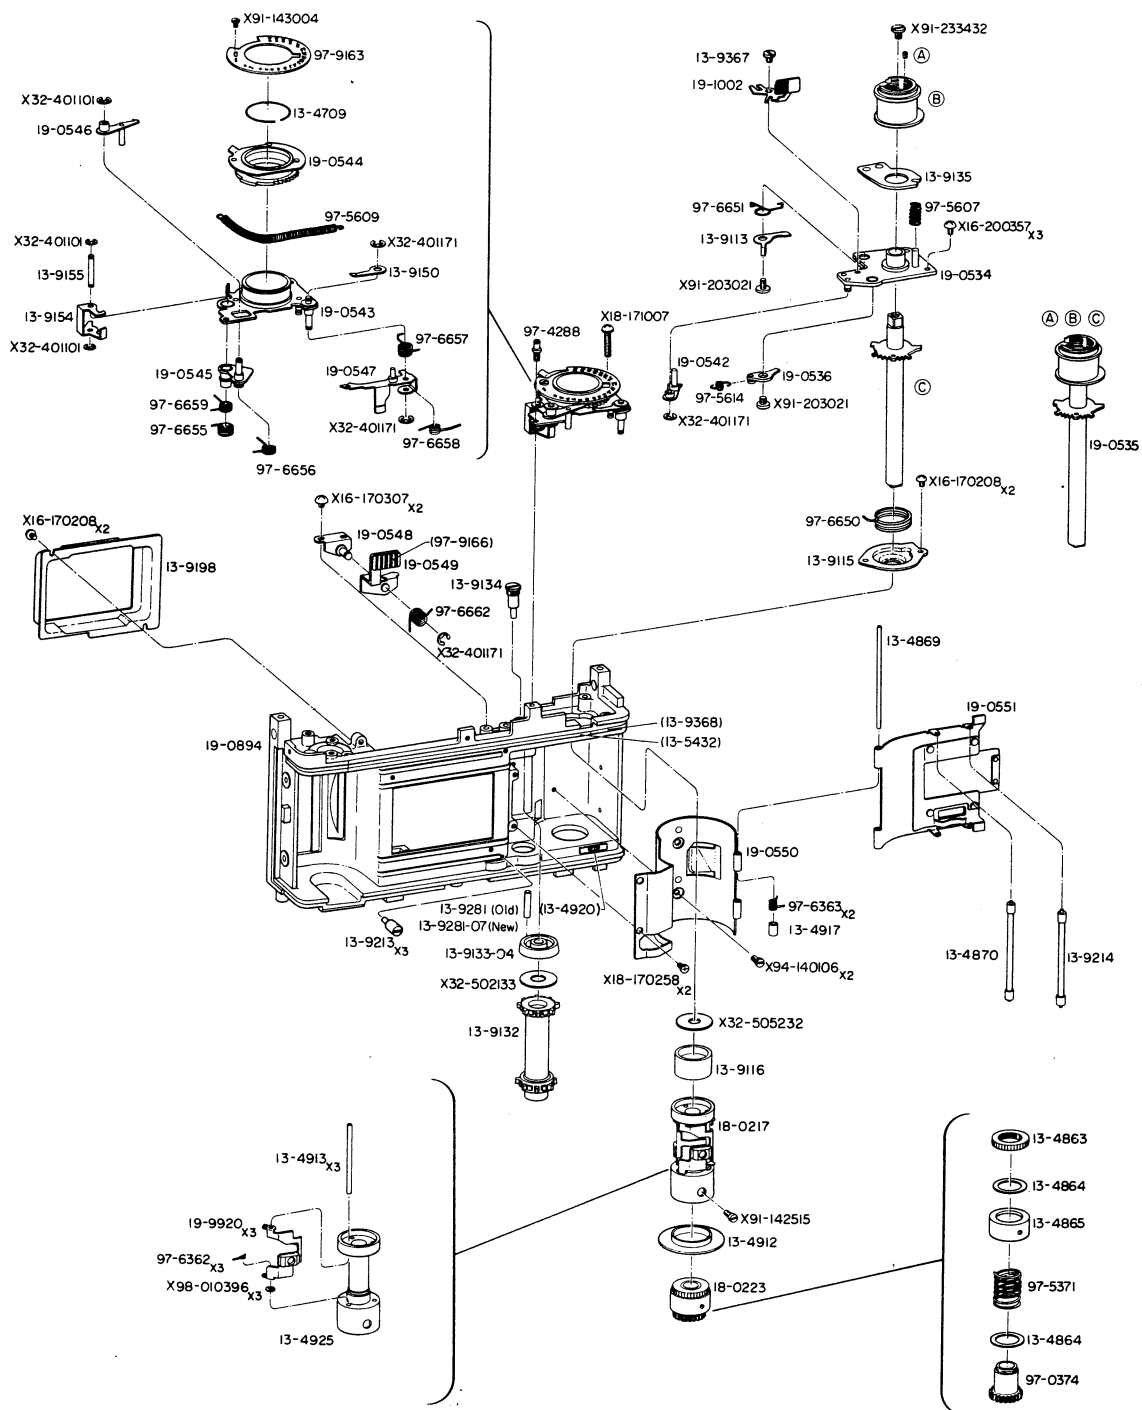


PARTS LIST

FILM COUNTER & TAKE UP SPOOL & WINDING SHAFT

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
リ テ イ ナ ー	E	13-4709	1	Retainer
ナ ッ ト	E	13-4863	1	Nut
フリクションワッシャー	E	13-4864	2	Fiber
スプリングカバー	E	13-4865	1	Spring Cover
蝶 番 軸	D	13-4869	1	Shaft of Hinge
ロ ー ラ ー	D	13-4870	1	Roller
スプ ール フランジ	E	13-4912	1	Spool Flange
水 か き 軸	E	13-4913	3	Shaft
カ ラ ー	E	13-4917	1	Collar
オレンジマーク	D	13-4920	1	Orange Mark
ス プ ー ル	E	13-4925	1	Spool
モルトブレーン	C	13-5432	1	Light Shield
巻 上 げ ス ト ッ パ ー	E	13-9113	1	Winding Stopper
遮 光 皿	E	13-9115	1	Light Shield
カ ラ ー	D	13-9116	1	Collar
スプロケット	D	13-9132	1	Sprocket
カムリング	D	13-9133	1	Cam Ring
スプロケット軸	D	13-9134	1	Sprocket Shaft
シャッターリリース板	C	13-9135	1	Shutter Release Plate
枚数盤ストッパー	D	13-9150	1	Stopper
空 送 り レ バ ー	D	13-9154	1	Film Feed Lever
空 送 り レ バ ー 軸	D	13-9155	1	Lever Shaft
遮 光 枠	E	13-9198	1	Light Shield
ビ ス	D	13-9213	3	Screw
ロ ー ラ ー	D	13-9214	1	Roller
ビ ン	D	13-9281	1	Pin
ビ ス	C	13-9367	1	Screw
モルトブレーン	C	13-9368	2	Light Shield
ス プ ー ル	D	18-0217	1	Take Up Spool Unit
スプ ール フリクション	E	18-0223	1	Spool Friction
巻 上 げ 上 板	E	19-0534	1	Winding Upper Plate
巻 上 げ 軸	C	19-0535	1	Winding Shaft
ラ チ ャ ッ ト 爪	E	19-0536	1	Ratchet Claw
巻 止 め 外 し	D	19-0542	1	Stopper Remove Lever
カ ウ ン タ ー 地 板	E	19-0543	1	Film Counter Base
カ ウ ン タ ー ギ ャ ー	D	19-0544	1	Counter Gear
送 り 爪 地 板	E	19-0545	1	Feeding Claw Base
送 り 爪	D	19-0546	1	Feeding Claw
複 帰 レ バ ー	C	19-0547	1	Reset Lever
指 標 ホ ル ダ ー	E	19-0548	1	Index Holder
フィルム送り指標	C	19-0549	1	Film Feed Index
スプロケットカバー	D	19-0550	1	Sprocket Cover
中 ぶ た	D	19-0551	1	Inner Cover
本 体	E	19-0894	1	Body
シャッターチャージ指標	D	19-1002	1	Shutter Charge Index
水 か き	E	19-9920	3	Friction Rubber
スプ ール ギ ャ ー	E	97-0374	1	Spool Gear
ビ ス	E	97-4288	1	Screw
コイルスプリング	D	97-5371	1	Coil Spring
コイルスプリング	D	97-5607	1	Coil Spring

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
コイルスプリング	D	97-5609	1	Coil Spring
コイルスプリング	D	97-5614	1	Coil Spring
コイルスプリング	E	97-6362	3	Coil Spring
ス プ リ ン グ	E	97-6363	2	Spring
ス プ リ ン グ	D	97-6650	1	Spring
ス プ リ ン グ	D	97-6651	1	Spring
ス プ リ ン グ	D	97-6655	1	Spring
ス プ リ ン グ	D	97-6656	1	Spring
ス プ リ ン グ	D	97-6657	1	Spring
ス プ リ ン グ	D	97-6658	1	Spring
ス プ リ ン グ	D	97-6659	1	Spring
ス プ リ ン グ	D	97-6662	1	Spring
フィルムカウンター	D	97-9163	1	Film Counter
フィルム送り指標	E	97-9166	1	Film Feed Index
十 字 ナ ベ ビ ス		X16-170208	4	Screw
十 字 ナ ベ ビ ス		X16-170307	2	Screw
十 字 ナ ベ ビ ス		X16-200357	3	Screw
十 字 皿 ビ ス		X18-170258	2	Screw
十 字 皿 ビ ス		X18-171007	1	Screw
緊 定 ワ ッ シ ャ ー		X32-401101	3	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401171	4	Retaining Washer
ワ ッ シ ャ ー		X32-502133	1	Washer
ワ ッ シ ャ ー		X32-505232	1	Washer
平 ビ ス		X91-142515	1	Screw
平 ビ ス		X91-143004	1	Screw
平 ビ ス		X91-203021	2	Screw
平 ビ ス		X91-233432	1	Screw
皿 ビ ス		X94-140106	2	Screw
ワ ッ シ ャ ー		X98-010396	3	Washer

CIRCUIT DIAGRAM
of
CANON NEW CANONET QL 17

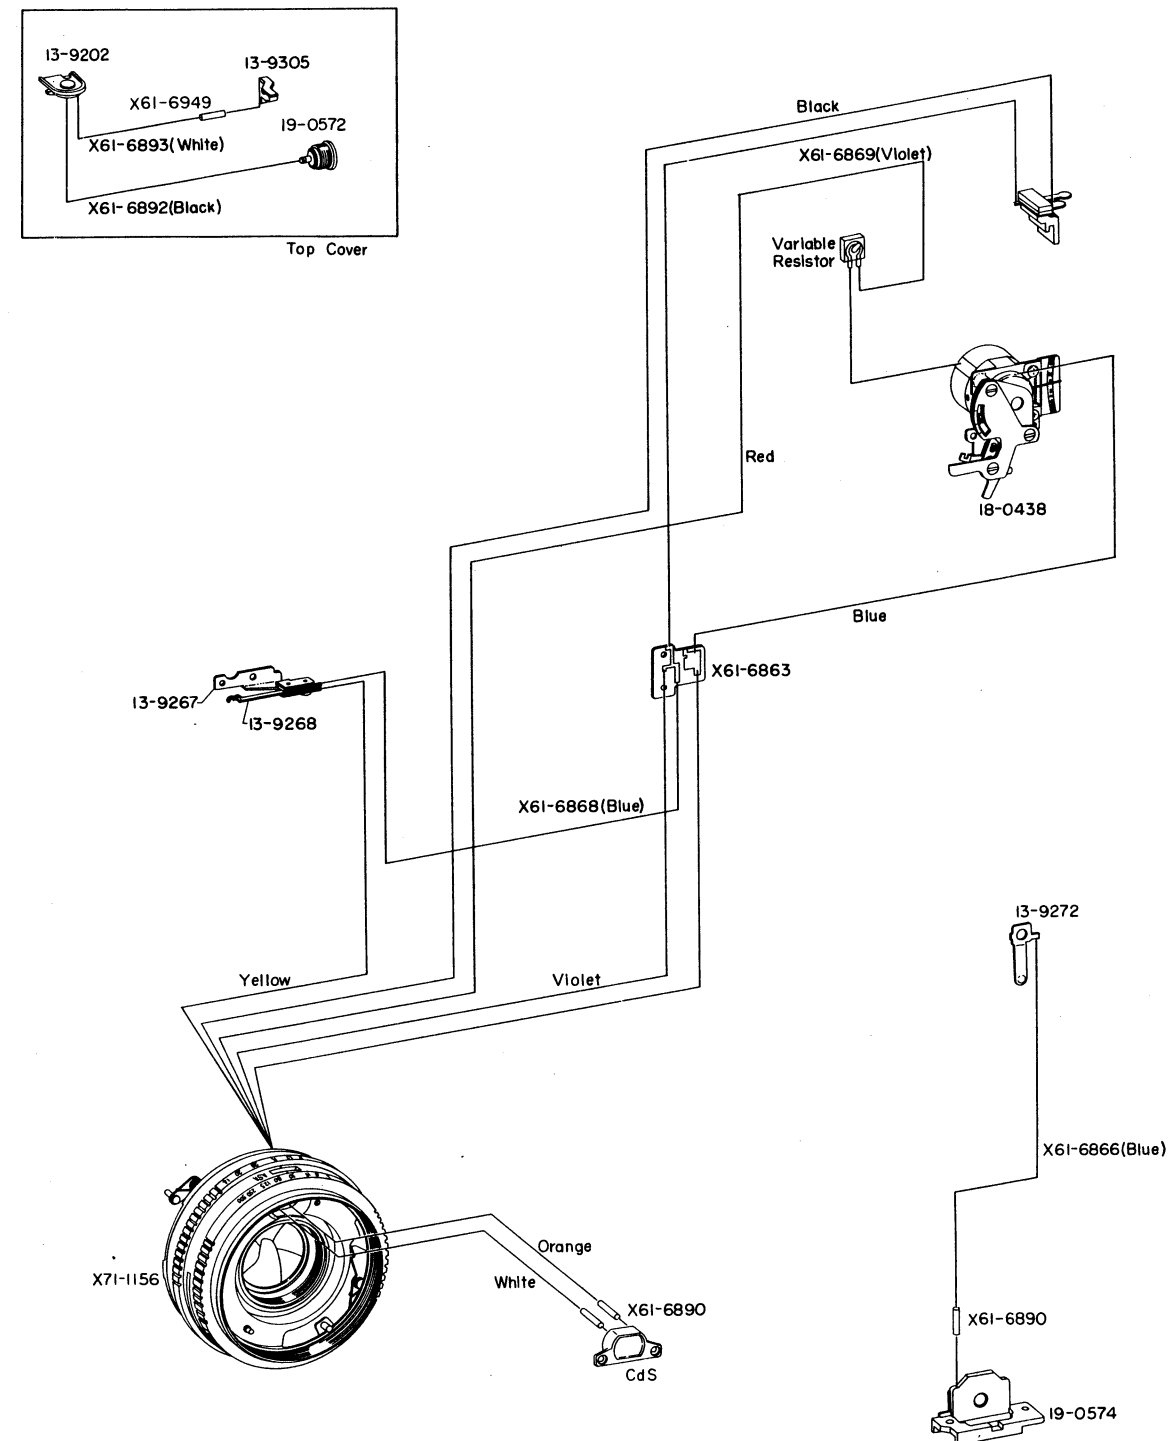

INDEX OF PARTS NUMBERS

PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE
Y00-1189	3, 4	13-9155	5	13-9277	3	19-0544	5
		13-9167	3	13-9278	3	19-0545	5
10-0242	4	13-9169	1	13-9279	1	19-0546	5
10-0243	4	13-9173	3	13-9280	1	19-0547	5
10-1244	4	13-9175	4	13-9281	5	19-0548	5
10-1245	4	13-9176	4	13-9382	1	19-0549	5
10-0246	4	13-9181	4	13-9284	1	19-0550	5
10-0247	4	13-9193	4	13-9287	1	19-0551	5
10-0248	1	13-9195	4	13-9289	1	19-0552	1
10-0249	1	13-9196	1	13-9290	3	19-0553	3
		13-9197	4	13-9393	2	19-0554	3
13-4100	3	13-9198	5	13-9294	2	19-0555	4
13-4248	1	13-9199	2	13-9298	2	19-0556	1
13-4531	1	13-9200	2	13-9299	2	19-0557	4
13-4542	1	13-9201	1	13-9303	1	19-0558	4
13-4612	1	13-9202	1, 6	13-9304	1	19-0559	4
13-4615	1	13-9203	1	13-9305	1, 6	19-0560	4
13-4709	5	13-9204	1	13-9313	2	19-0562	2
13-4863	5	13-9205	1	13-9314	2	19-0563	2
13-4864	5	13-9206	1	13-9315	2	19-0564	2
13-4865	5	13-9207	1	13-9316	3	19-0565	2
13-4869	5	13-9208	1	13-9317	3	19-0566	2
13-4870	5	13-9211	3	13-9318	3	19-0567	2
13-4912	5, 6	13-9213	5	13-9319	2	19-2572	2, 6
13-4913	5	13-9214	5	13-9323	1	19-0573	2
13-4917	5	13-9215	1	13-9325	3	19-0574	3, 6
13-4920	5	13-9216	1	13-9329	1	19-0577	1
13-4923	3	13-9220	2	13-9330	1	19-0579	1
13-4925	5	13-9221	2	13-9367	5	19-0580	2
13-4932	1	13-9222	2	13-9368	5	19-0583	1
13-5368	1	13-9224	2			19-0752	1
13-5432	5	13-9225	2	18-0217	5	19-0894	5
13-9103	1	13-9228	1	18-0223	5	19-1002	5
13-9105	1	13-9231	3	18-0438	2, 6	19-9620	1
13-9106	1	13-9233	2	18-0439	2	19-9920	5
13-9113	5	13-9236	2	18-0445	2		
13-9115	5	13-9239	2	18-0446	2	27-0181	2
13-9116	5	13-9242	2			27-8639	2
13-9118	3	13-9259	2	19-0531	1	27-8643	2
13-9120	3	13-9264	2	19-0532	1		
13-9128	3	13-9265	2	19-0533	4	97-0374	5
13-9129	3	13-9266	2	19-0534	5	97-0625	3
13-9130	3	13-9267	2, 6	19-0535	5	97-0626	3
13-9131	3	13-9268	2, 6	19-0536	5	97-0628	3
13-9132	5	13-9269	2	19-0537	3	97-0629	3
13-9133	5	13-9270	2	19-0538	3	97-4288	5
13-9134	5	13-9271	3	19-0539	3	97-5371	5
13-9135	5	13-9272	3, 6	19-0540	3	97-5607	5
13-9150	5	13-9273	3	19-0542	5	97-5608	3
13-9154	5	13-9276	1	19-0543	5	97-5609	5

PARTS NO. PAGE PARTS NO. PAGE PARTS NO. PAGE


97-5610	2	X18-140188	2	X91-173556	3
97-5611	2	X18-170207	2	X91-203021	3,5
97-5612	2	X18-170258	1,2,5	X91-203539	3
97-5613	3	X18-170306	1	X91-233436	3
97-5614	5	X18-170307	2		
97-6093	3	X18-170358	3	X94-140106	5
97-6362	5	X17-171007	5		
97-6363	5	X18-200358	1	X98-010396	5
97-6650	5	X18-200458	1	X98-010407	2
97-6651	5	X18-200557	3	X98-020434	3
97-6652	3			X98-100386	1
97-6653	3	X19-170306	1		
97-6654	3				
97-6655	5	X32-401101	1,5		
97-6656	5	X32-401131	3		
97-6657	5	X32-401171	2,3,4,5		
97-6658	5	X32-401201	3		
97-6659	5	X32-501531	1		
97-6660	4	X32-502123	3		
97-6661	4	X32-502133	5		
97-6662	5	X32-502312	2		
97-6664	2	X32-502624	4		
97-6665	2	X32-505221	3		
97-6669	1	X32-505232	5		
97-6680	3				
97-6681	3	X34-100571	4		
97-7600	1				
97-7602	1	X61-6863	2,6		
97-7603	4	X61-6864	2		
97-9163	5	X61-6866	6		
97-9166	5	X61-6868	6		
		X61-6869	6		
X10-170207	2	X61-6890	2,6		
		X61-6892	6		
X11-140158	4	X61-6893	6		
X11-140188	4	X61-6949	6		
X11-140207	2	X61-8018	2		
X11-140208	4				
X11-170207	2	X71-1156	2,6		
X14-140258	3	X91-142515	5		
		X91-142525	3		
X16-140157	1	X91-143004	5		
X16-170208	3,5	X91-143512	1		
X16-170257	2	X91-143556	2		
X16-170307	2,5	X91-143560	3		
X16-170857	3	X91-171427	2		
X16-200308	4	X91-173425	2		
X16-200357	3,5	X91-173537	1,2		
X16-200458	3	X91-173542	2		

CANON REPAIR MANUAL

CANON BLACK CANONET QL 17
(REF. NO. 1-30802)

CANON INC. JAPAN

EXPLODED VIEW
of
CANON BLACK CANONET QL 17

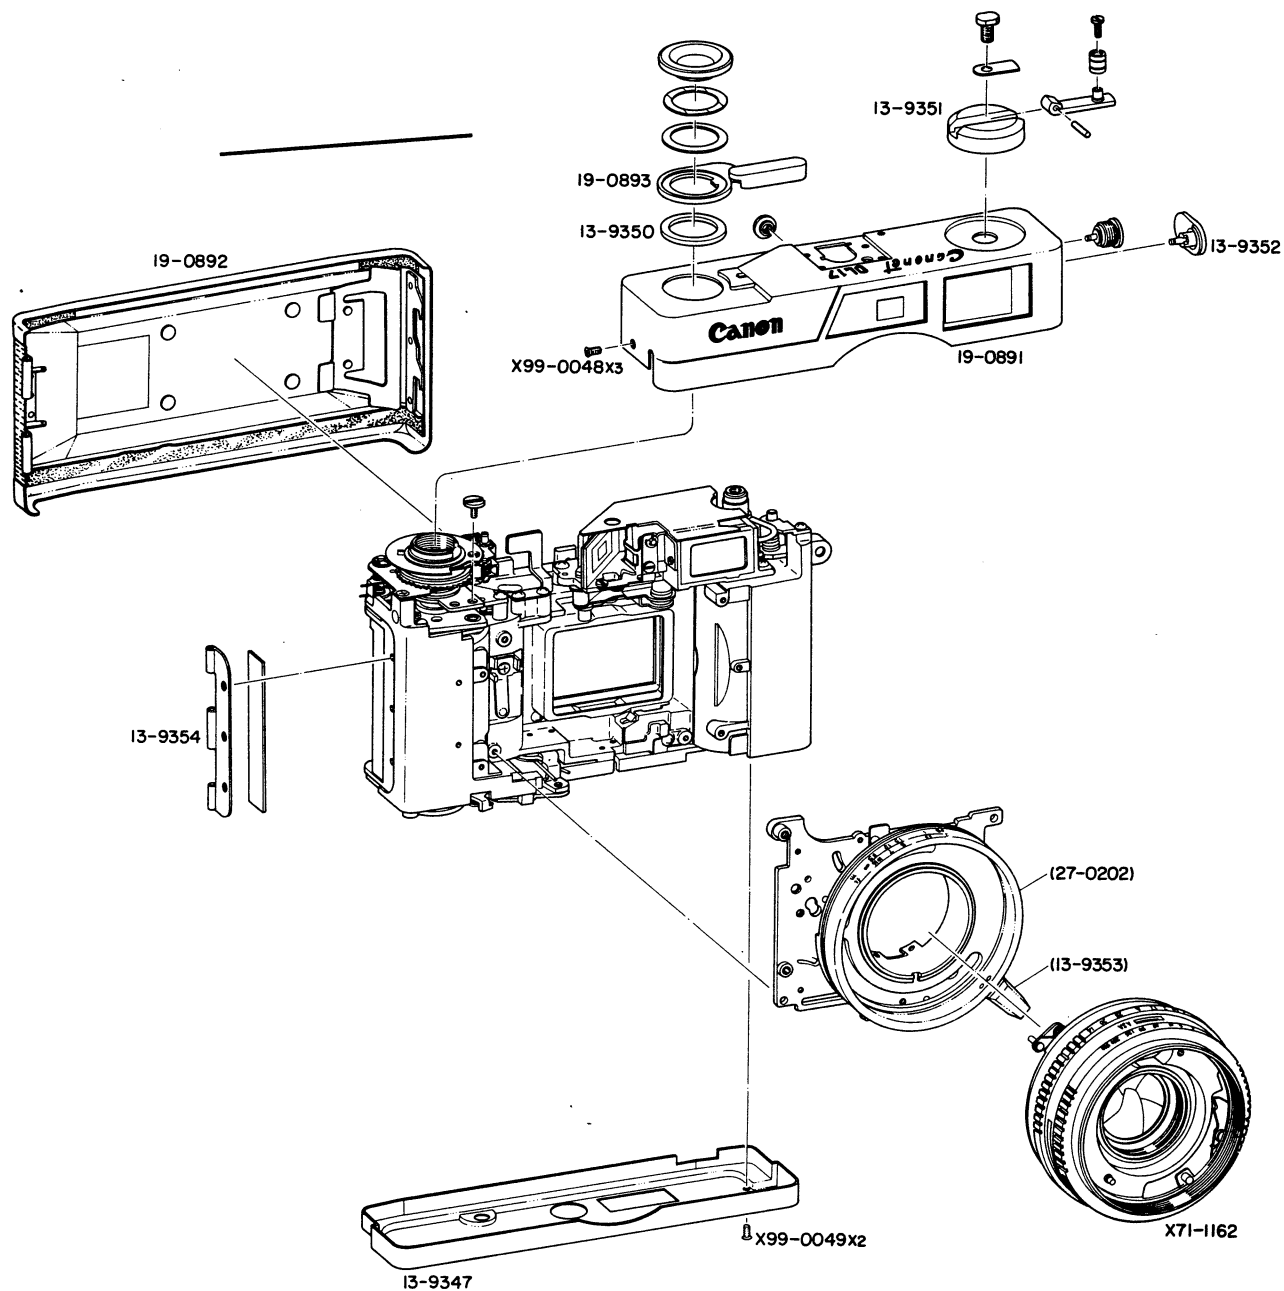

Canon Black Canonet QL17 is absolutely the product in mechanism as Canon Canonet QL17 is, we therefore picked up only parts which are used in the Canon Black Canonet QL17 for this repair manual. The rest of the parts as Canon Black Canonet QL17, in case if necessary, refer to the repair manual of Canon Canonet QL17 (1-30801).

PARTS LIST

PARTS NO.	QTY.	DESCRIPTION		
13-9347	1	下 部 カ バ ー	Base Cover	
13-9350	1	ワ ッ シ ャ ー	Washer	
13-9351	1	巻 き 戻 し つ ま み	Rewind Knob	
13-9352	1	フラッシュターミナルカバー	Flash Terminal Cover	
13-9353	1	距 離 つ ま み	Focusing Knob	
13-9354	1	蝶 番	Hinge	
19-0891	1	上 部 カ バ ー	Top Cover	
19-0892	1	裏 ぶ た	Back Cover	
19-0893	1	巻 き 上 げ レ バ ー	Winding Lever	
27-0202	1	距 離 環	Focusing Ring	
X71-1162	1	シ ャ ッ タ ー	Shutter	
X99-0048	3	丸 平 ビ ス	Screw	
X99-0049	2	平 ビ ス	Screw	

CANON REPAIR MANUAL

CANON CANONET QL 17


(REF. NO. 1-30805)

CANON BLACK CANONET QL 17

(REF. NO. 1-30806)

CANON INC. JAPAN

EXPLODED VIEW
of
CANON CANONET QL 17
CANON BLACK CANONET QL 17

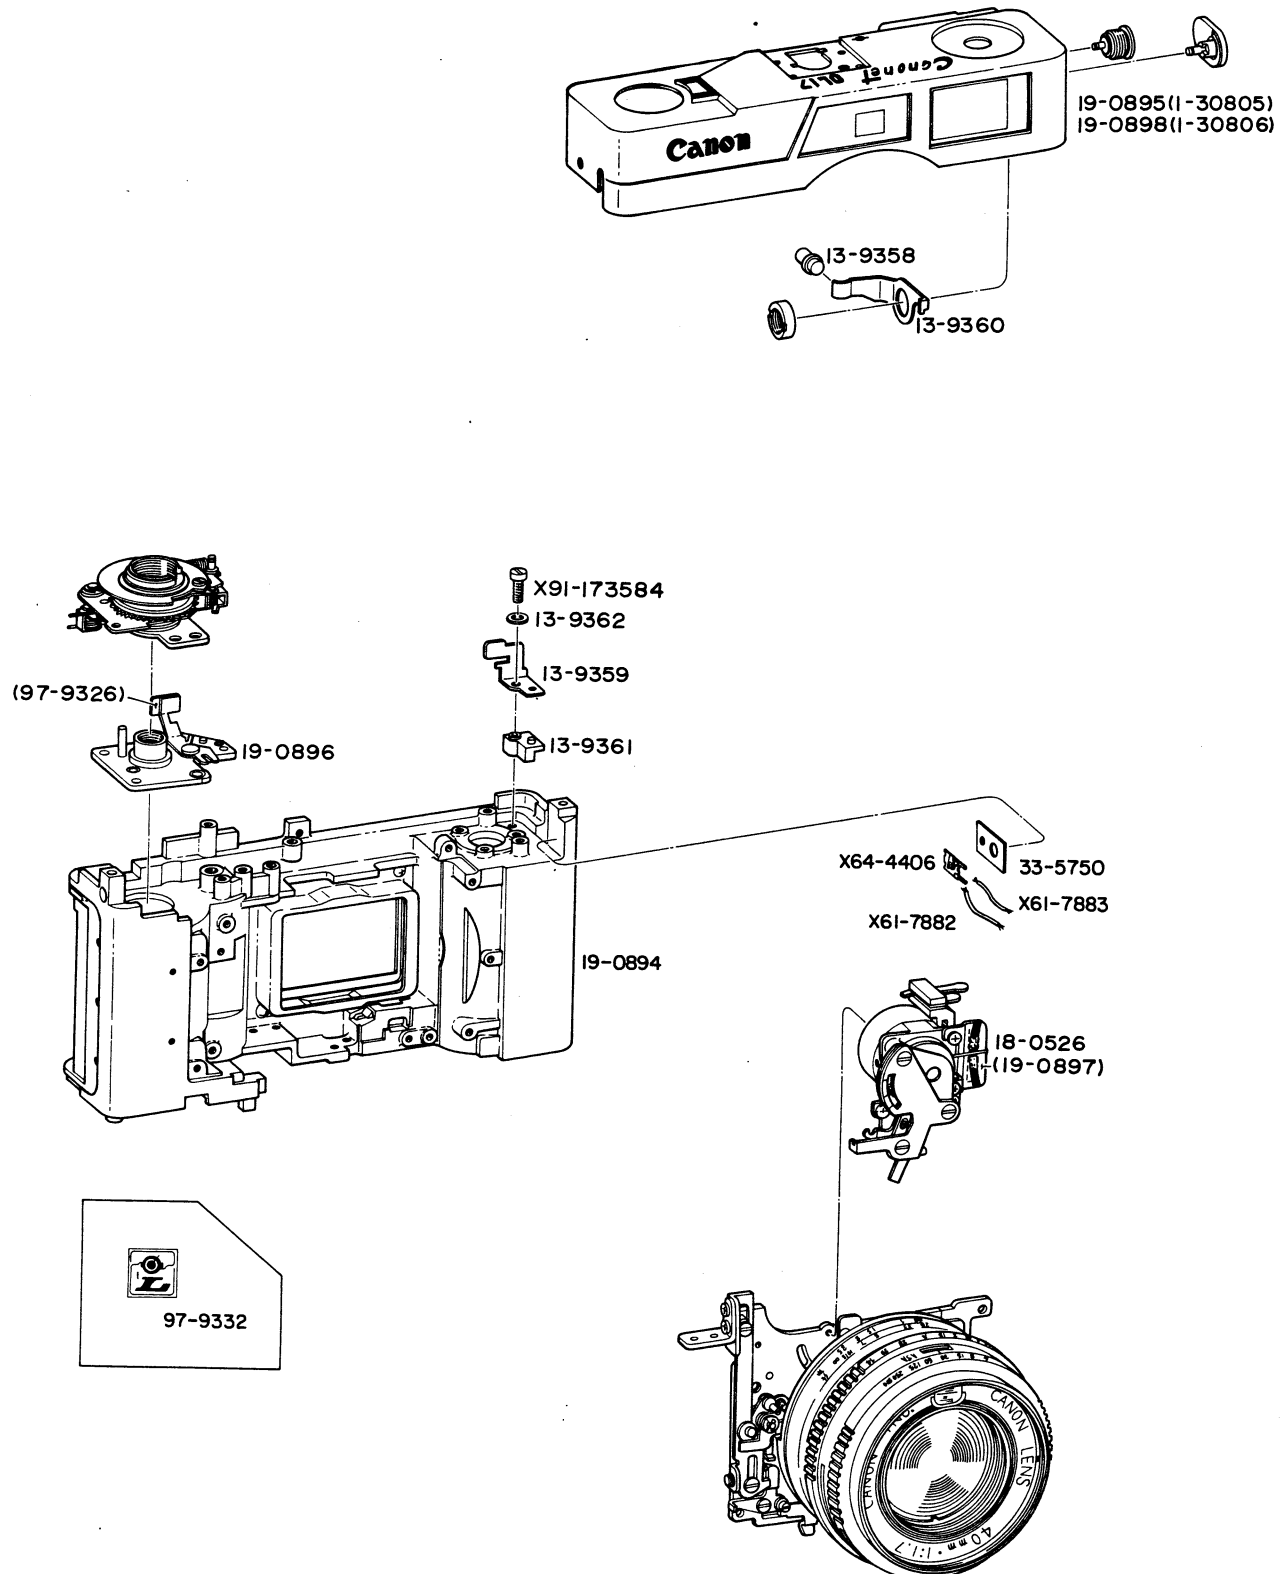

The Canon Canonet QL 17 (Type II) is basically the same as Canonet QL 17 except for the parts listed in this repair manual.

The additions include a battery checker and shutter charge indicator.

Part numbers for both chrome and black models are listed.

PARTS LIST

部品名称	CLASS	PARTS NO.	QTY.	DESCRIPTION
チェッカーボタン	C	13-9358	1	Checker Button
接片	C	13-9359	1	Contact
接片	C	13-9360	1	Contact
接片台	D	13-9361	1	Contact Base
絶縁ワッシャー	D	13-9362	1	Washer
メーターユニット	C	18-0526	1	Exposure Meter Unit
本体	E	19-0894	1	Body
上部カバー	C	19-0895	1	Top Cover (1-30805)
巻きあげ上地板	D	19-0896	1	Winding Upper Plate
絞り目盛板	C	19-0897	1	Aperture Scale Plate
上部カバー	C	19-0898	1	Top Cover (1-30806)
抵抗取付け板	D	33-5750	1	Resistor Support
巻きあげ指標	D	97-9326	1	Winding Index
シール	D	97-9332	1	Seal
リード線	C	X61-7882	1	Lead
リード線	C	X61-7883	1	Lead
半固定抵抗	D	X64-4406	1	Variable Resistor
平ビス		X91-173584	1	Screw

CANON REPAIR GUIDE

CANON CANONET QL 17
(REF. NO. 1-30801)


CANON INC. JAPAN

C O N T E N T S

	Page
I. Disassembling	
1. Removal of Top Cover	4
2. Removal of Base Cover	5
3. Removal of Front Cover	6
4. Removal of Front Lens Unit	7
5. Removal of Shutter	8
6. Removal of Exposure Meter	9
II. Exchanging and Adjusting	
1. Exchanging and Adjusting of Shutter	10
2. Exchanging and Adjusting of Exposure Meter	16
3. Exchanging and Adjusting of View Finder	21
III. Circuit Diagram	22

I. Disassembling (x)

1. Removal of Top Cover

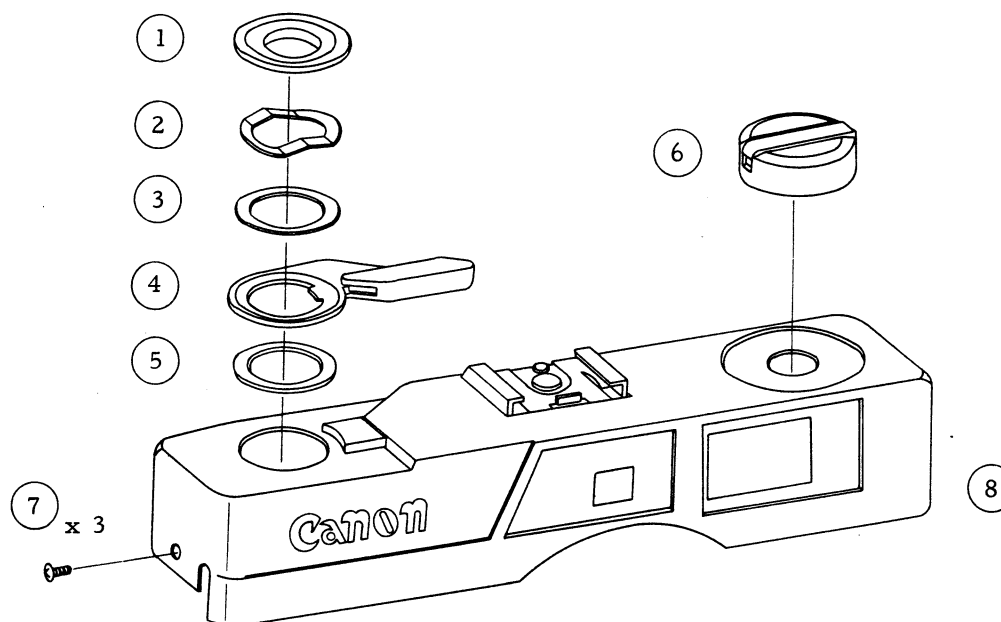

Work

Specifications

1. Removal of Winding Lever (4)

Remove it in the following sequence.

(1) Shutter Button Guard	(2) Washer	(3) Washer
13-9105	13-4615	X98-100386
(4) Winding Lever	(5) Washer	
19-0579	13-9106	


2. Removal of Rewind Crank (6)

(6) Rewind Crank
19-0577

3. Removal of Top Cover (8)

(7) Screw x 3	(8) Top Cover
X91-170306	19-0531

2. Removal of Base Cover

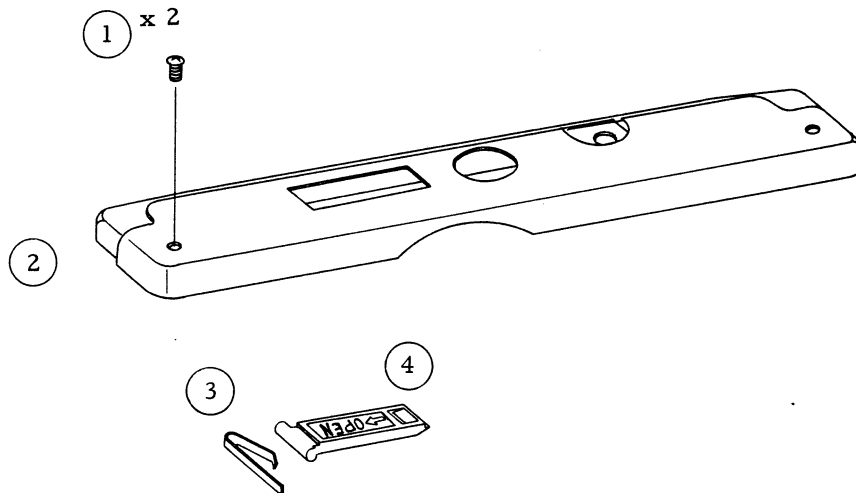

Work

1. Removal of Base Cover (2)


Specifications

Remove it in the following sequence.

(1) Screw x 2	(2) Base Cover	(3) Plate Spring
X18-170306	13-9103	97-7600

It is also possible to remove (4) Battery Cover .
19-0575

3. Removal of Front Cover ^(X) - Top + Bottom should be removed first.

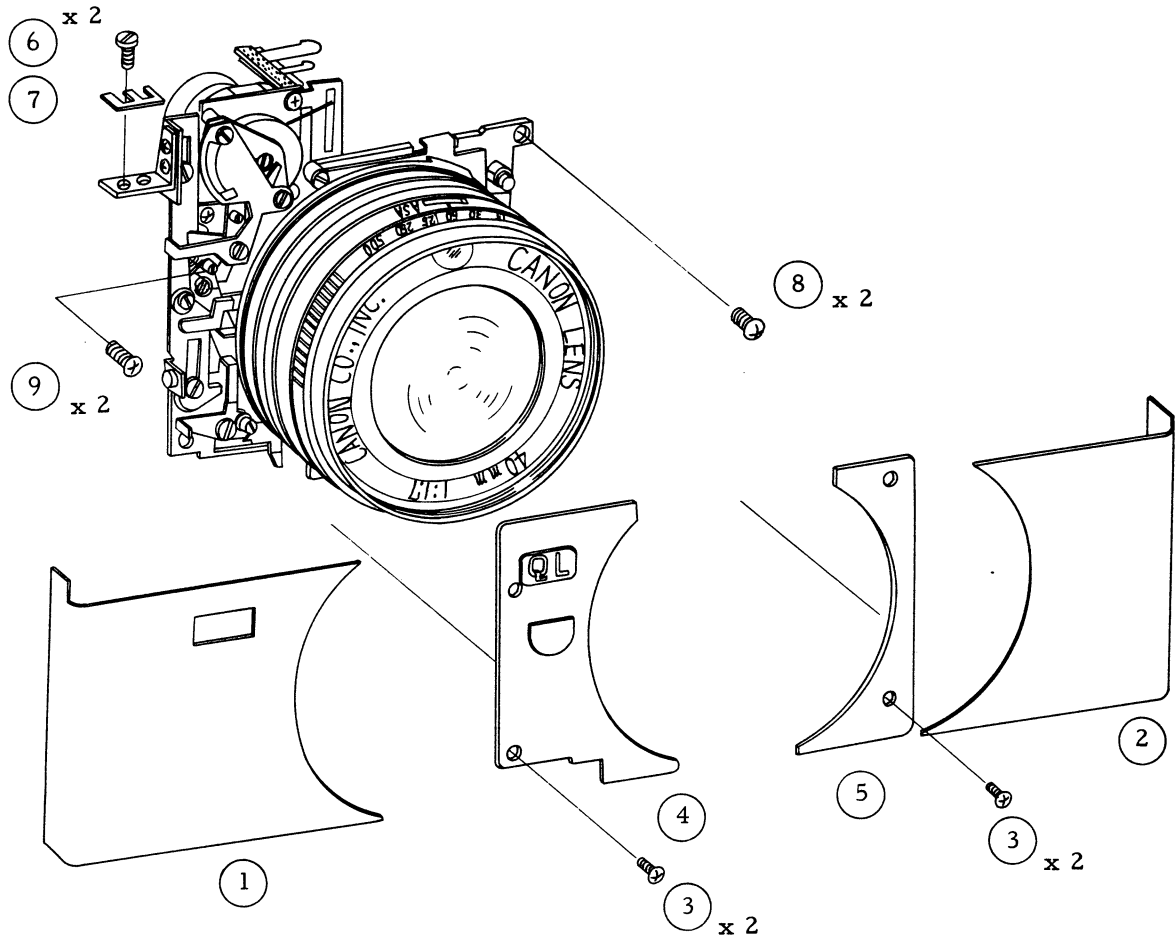

Work

1. Removal of Front Cover (4), (5)

Remove them in the following sequence.

(1) Leather (left) - (2) Leather (right) - (3) Screw x 4
13-9203 13-9204 X18-170258

(4) Front Cover - (5) Front Cover
13-9201 13-9202

2. Removal of Front Panel

(6) Screw x 2 - (7) Adjusting Washer - (8) Screw x 2 -
X91-173527 13-9228 X16-200458


(9) Screw x 2
X18-200458

The Front Panel in the state attached the Shutter and the Exposure Meter can be taken out.

unsolder red wire in back of meter at "pot"
R/F Parallax mark will fall free

When front panel is out, there is 1 blue wire still attached at circuit board on right side. Wire goes to solder point at extreme right.

4. Removal of Front Lens Unit (4)

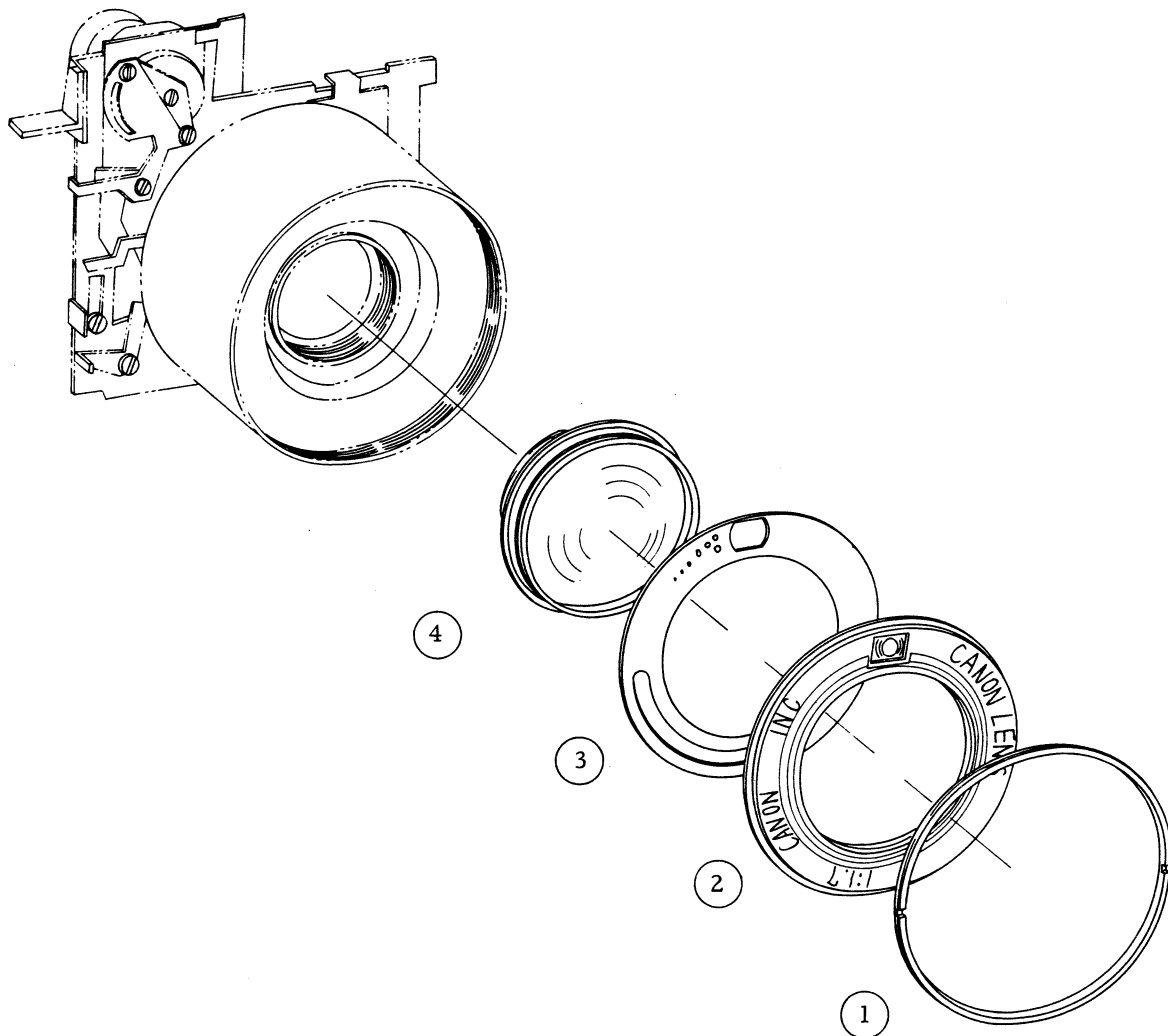

Work


1. Removal of Front Lens Unit (4)

Specifications

Remove it in the following sequence.


(1) Assemble Collar - (2) Name Ring -
27-8639 19-0580

(3) Diaphragm Plate - (4) Front Lens Unit
13-9293 18-0445



Remove the Front Lens Unit with TO630-13-9246-1T special screwdriver putting in the arrow.

5. Removal of Shutter

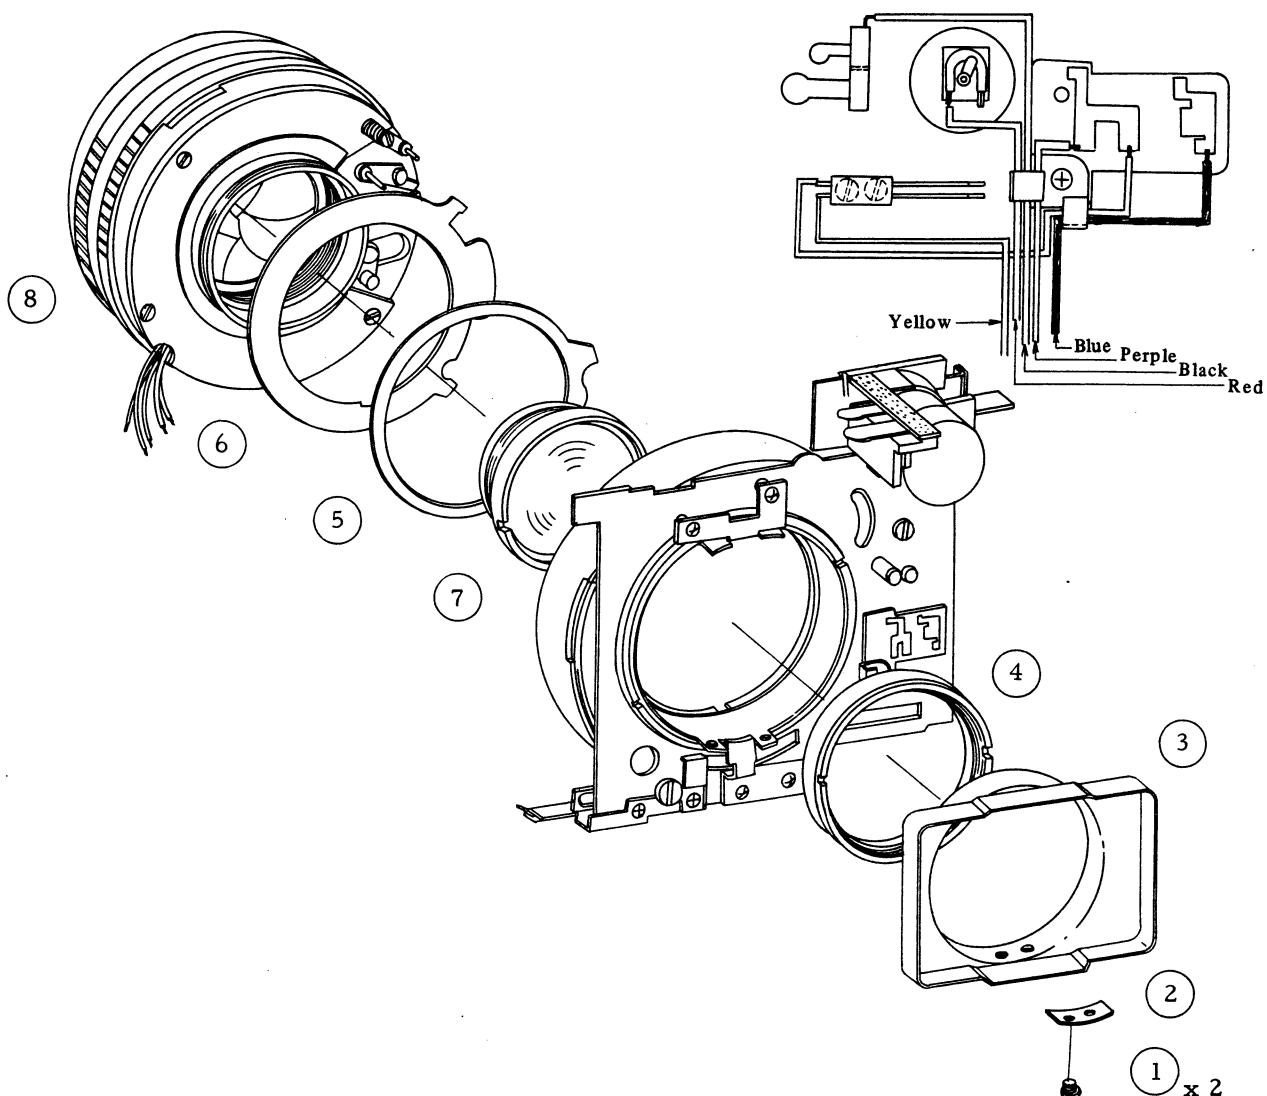

Work

1. Removal of Light Shield (3)

Remove them in the following sequence.

(1) Screw x 2	(2) Nut	(3) Light Shield
X14-140158	13-9299	13-9199

Removal of the cords soldered


2. Removal of Shutter (8)

(4) Assemble Collar	(5) Charge Ring
27-8643	13-9200

(6) Intermediate Ring	(7) Rear Lens Unit	(8) Shutter
13-9298	18-0446	X71-1156

n. b. : The shutter in the state attached the Rear Lens Unit can be taken out when removing the Assemble Collar (4).

6. Removal of Exposure Meter

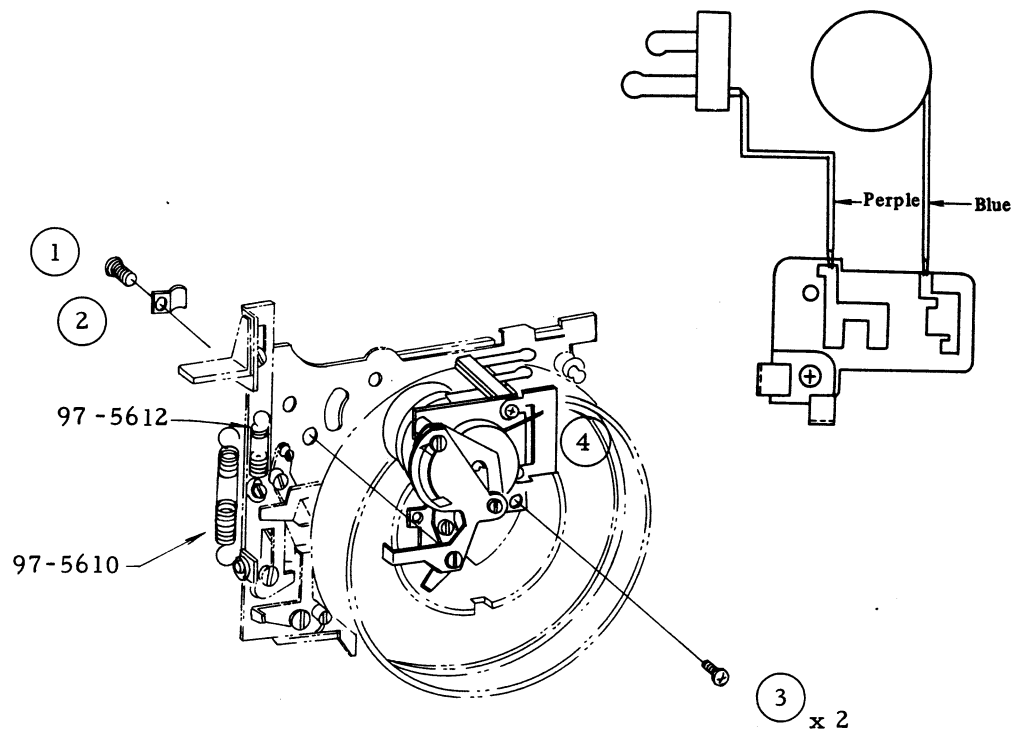

<u>Work</u>	<u>Specifications</u>
1. Removal of Cord Holder (2)	Remove them in the following sequence. <u>(1) Screw</u> X91-173542 <u>(2) Cord Holder</u> 13-9242
2. Removal of Exposure Meter Unit (4)	Removal of the cord soldered Removal of Coil Spring 97-5610 and Coil Spring 97-5612 <u>(3) Screw x 2</u> X16-170307 <u>(4) Exposure Meter Unit</u> 18-0438

II. Exchanging and Adjusting

1. Exchanging and Adjusting of Shutter

Work

Specifications

- | | |
|------------------|--|
| 1. Disassembling | Refer to the paragraph "Removal of Shutter" on Page 5. |
| 2. Inspection | 2.1 Aperture blade operation |
| | 2.2 Charge and release of Shutter |

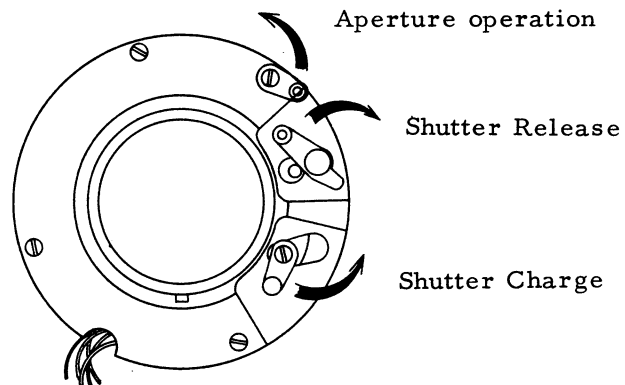


Fig. 1

3. Mounting

3.1 Mounting Intermediate Ring and Charge Ring.

Fix Intermediate Ring 13-9298 and Charge Ring 13-9200 on the Shutter in this sequence.

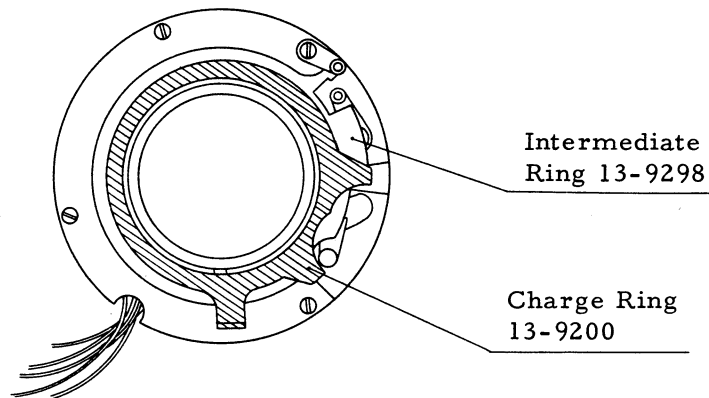


Fig. 2

3.2 Mounting the Shutter on the Front Panel Unit

- 1) Set the Shutter to "AUTO" and the Focusing Ring to " ∞ ".
- 2) Of five cords led from the Shutter, connect four cords (blue, yellow, purple and black) to Print Circuit Plate X61-6864 by passing them through

the hole of the Front Panel, and the remaining cord (red) to the said Plate by passing it under the Focusing Ring.

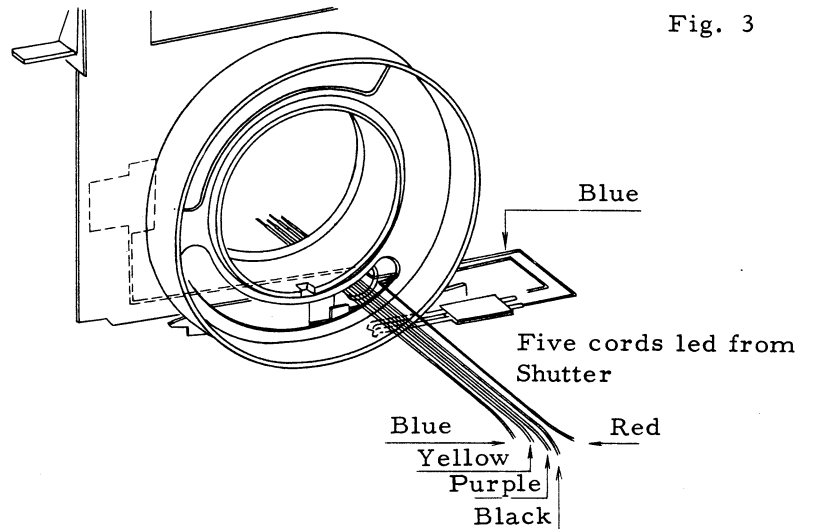


Fig. 3

- 3) Set the Charge Ring "Section A" to the arrow-marked "A".

Set the Aperture Connecting Pin "B" to the arrow-marked "B".

Set the Release Pin "C" to the arrow-marked "C". (See Fig. 4)

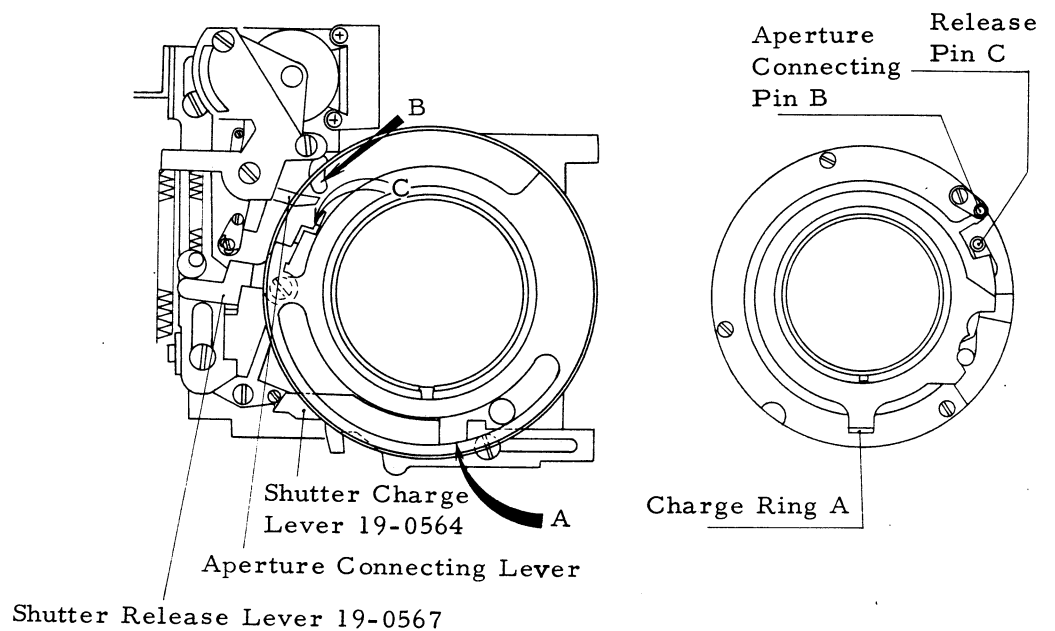


Fig. 4

4) Tightening Assemble Collar 27-8643.

3.3 Mounting Rear Lens Unit

Rear Lens Unit 18-0446 may be mounted before the Shutter is incorporated into the Front Panel Unit.

3.4 Mounting Light Shield 13-9199.

3.5 Soldering cords


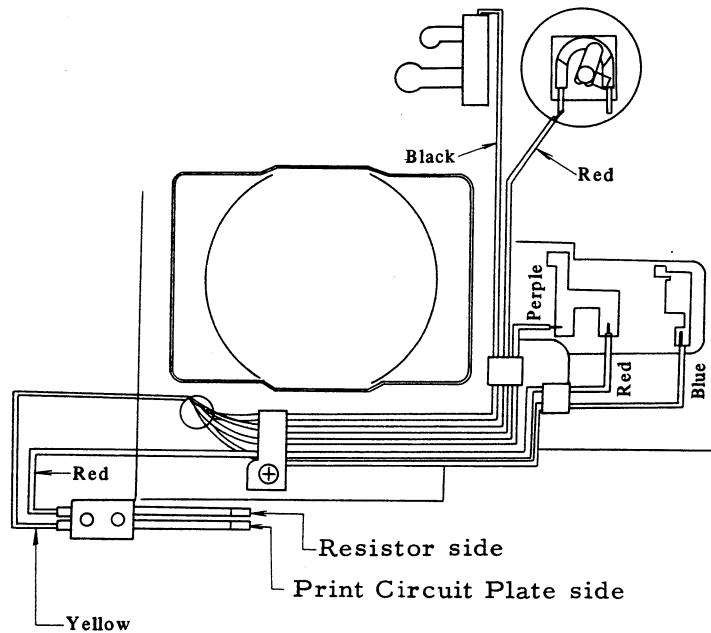


Fig. 5

3.6 Mounting Shutter on Main Body

- 1) Set the Film Counter at the position of S to 0.
Fig. 6 indicates the condition where Film Feed Lever 13-9154 is at non-gear section of Counter Gear 19-0544.

Fig. 6

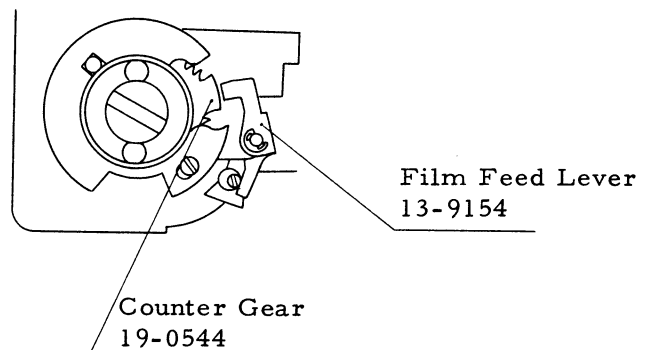

- 2) Set Stopper Remove Lever 19-0565 next to Stopper Remove Lever 19-0542 at the Main Body Side. Set Spring 97-6653 to the arrow-marked A of the Shutter Charge Lever. (Mount the Front Plate by bringing near to the Finder side.)

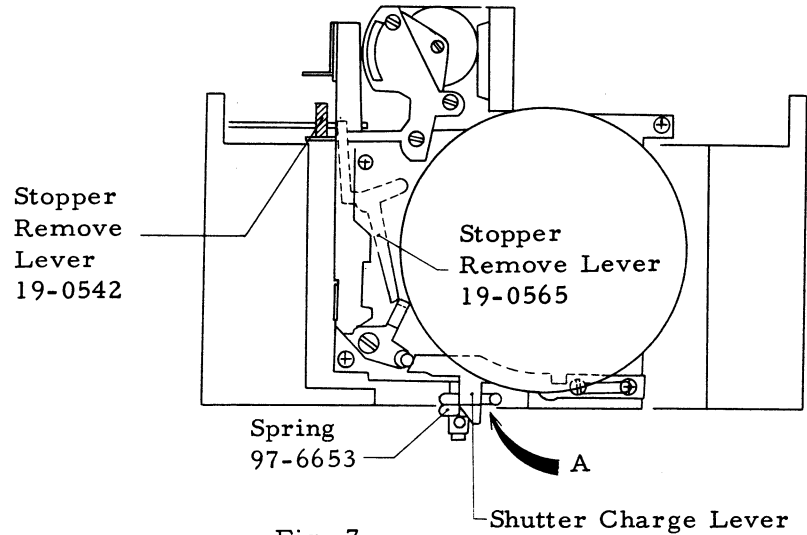


Fig. 7

- 3) Fixing of Connecting Lever 13-9227 and Shutter Release Plate 13-9135 with screws.

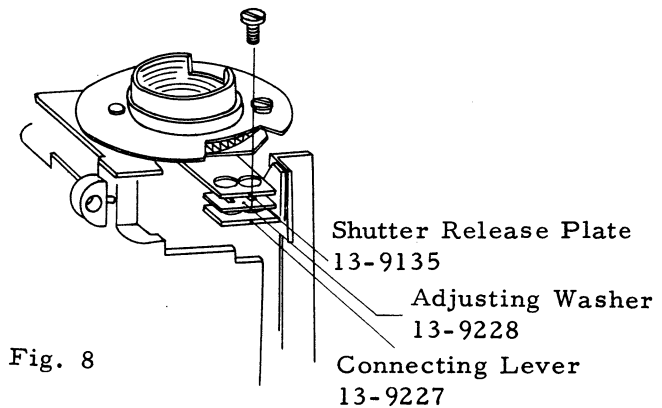


Fig. 8

- 3.7 Mounting Front Lens Unit 18-0439, Diaphragm Plate 13-9293, Name Ring 19-0580 and Assemble Collar 27-8639.


4. Adjustment

4.1 Adjustment of Shutter release position

The Shutter should be released at the position of 4.0 ± 0.2 mm of the Shutter Button stroke, and the Shutter Button should have a stroke play more than 0.4mm when released. (Check the Shutter release position at the close distance side.)


Adjust the position with the eccentric screw of Shutter Release Lever 19-0562. (See Fig. 9.)

Fig. 9

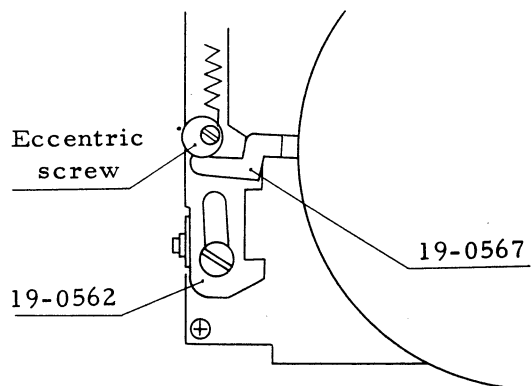


4.2 Adjustment of Winding Safety Mechanism (Prevention of double winding)

Winding Stopper 13-9113 should be caught by Winding Shaft 19-0535 after charging the Shutter, and be off from the Shaft after releasing. (Fig. 10)

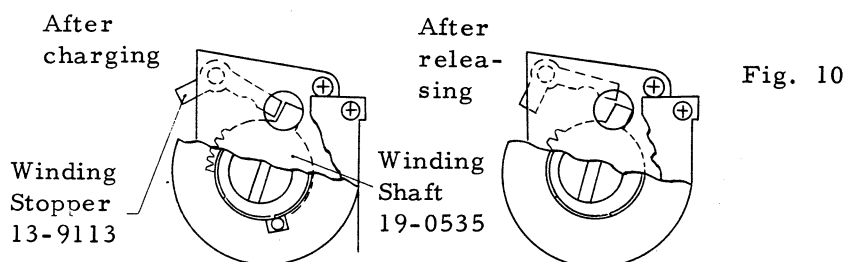

4.3 Position of Stopper Remove Lever

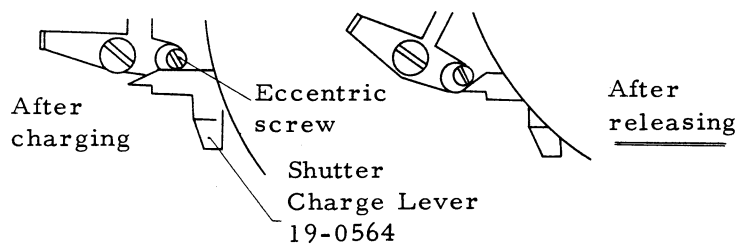

Adjust the position with the eccentric screw of the Stopper Remove Lever.

4.4 Adjustment of Film Feeding (Feeding leader section)

- 1) At the position of S to 0 on the Film Counter, the Winding Stopper should be off the Winding Shaft through Stopper Remove Lever 19-0542 together with continuous winding. (Fig. 11).

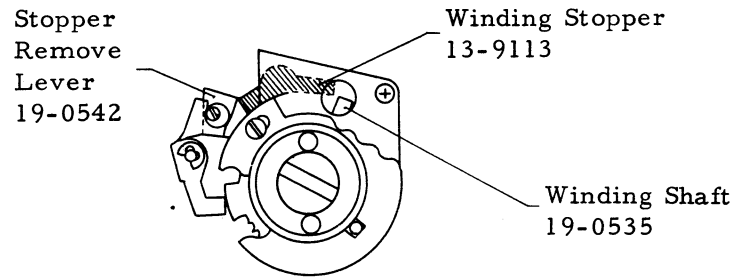


Fig. 11

- 2) When 1 has been obtained on the Film Counter, the Stopper Remove Lever has to work in the arrow-marked direction, and the Winding Stopper must be caught by the Winding Shaft. Then, continuous winding should be stopped.

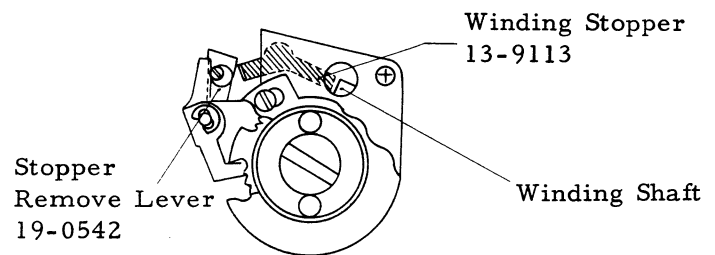


Fig. 12

The adjustment is to be made with the eccentric screw of Stopper Remove Lever 19-0542.

2. Exchanging and Adjusting of Exposure Meter

Work

1. Disassembling
2. Inspection
3. Mounting

Specifications

Refer to the paragraph "Removal of Exposure Meter Unit" on Page 6.

Omitted

- n. b.:
1. Exchange the CdS abd the Meter as a pair.
 2. Do not bend the needle.

3.1 Mounting Exposure Meter Unit

The needle clamber should be positioned at the right of Shutter Lock Lever 19-0566, and the Aperture Connecting Lever under the Aperture Connecting Pin of the Shutter. (Fig. 13)

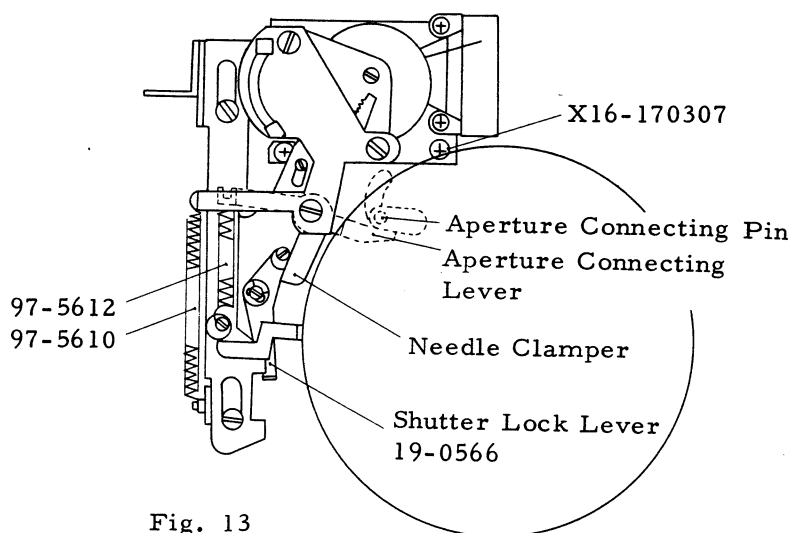


Fig. 13

3.2 Mounting Spring

3.3 Soldering cords


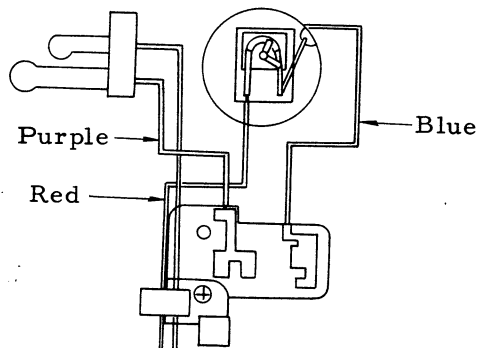


Fig. 14

3.4 Mounting Cord Holder

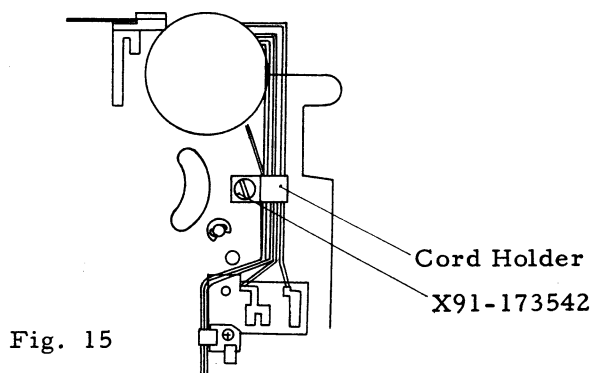

3.5 Mounting Meter Unit on Main Body

Mount the Front Plate on the Main Body.
(Refer to the Para. 3.6 "Mounting Shutter on Main Body" on Page 11.)


4. Adjustment

4.1 Adjustment of Aperture Diameter

Setting the Meter Needle to the marked line of F5.6 in AUTO, release the Shutter. Then, the Aperture Diameter should be F5.6.

n.b.: Try comparing the Aperture Diameter in AUTO with that in the manual operation.

The adjustment is to be made with the eccentric screw.

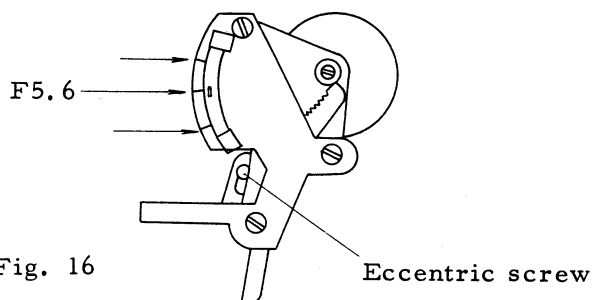

4.2 Adjustment of Viewfinder Needle position

If the Meter Needle is set to the marked line of F5.6, the needle should show 5.6.

The needle (Viewfinder) position is adjustable by bending the needle.

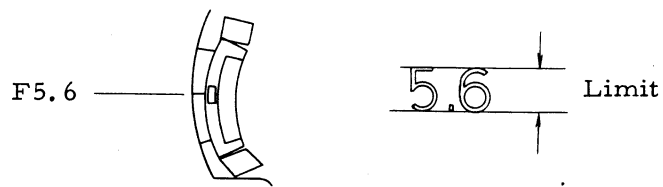


Fig. 17

- n.b.:
1. Bend the needle at the base, not at the top end.
 2. The needle has to work without being caught by the Mask.

4.3 Adjustment of space between Meter Needle and Clamper

Space between the Meter Needle and the Clamper should be as shown in Fig. 18 at the low brightness side.




Fig. 18

A:B = 0.2mm : 0.5mm

Adjust the space with the eccentric screw.
See Fig. 19.

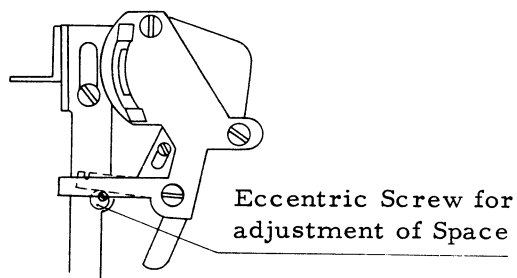


Fig. 19

- n.b.:
- At the high brightness side, the Shutter should be released after the Meter Needle has been clamped by the EE Cam.

4.4 Safety adjustment in case of improper exposure

- 1) For an improper exposure, Shutter Lock Lever 19-0566 catches Shutter Release Lever 19-0562,

and latter should stop functioning. (Fig. 20).

- 2) For any proper exposure (by Auto and all Manual stop down), space of more than 0.5mm should be assured between the Shutter Lock Lever and the Shutter Release Lever. (Fig. 21)

The adjustment is to be made with the eccentric screw of the Shutter Lock Lever.

Improper exposure

Proper exposure

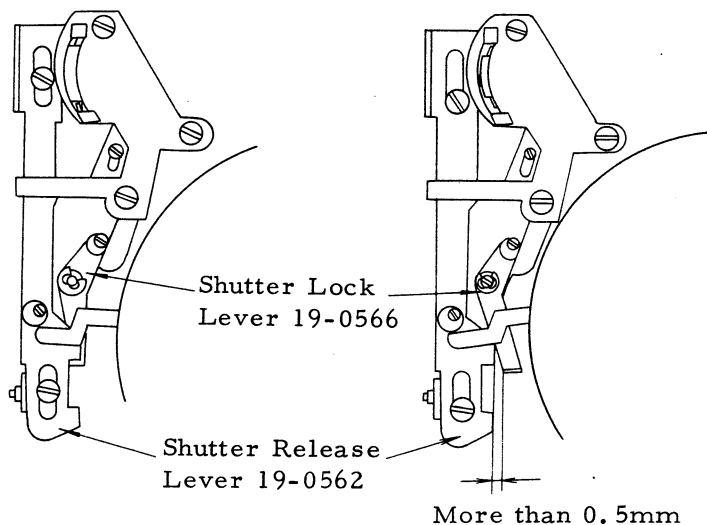


Fig. 20

Fig. 21

4.5 Adjustment of Meter accuracy

K=17.5

EV	cd/m ²	ASA	Shutter speed	Aperture	Standards
8	45	100	1/30	F 2.8	$\pm 1F$
11	358	100	1/60	F 5.6	$\pm 1F$
14	2861	100	1/125	F 11	$\pm 1F$

Adjust the accuracy with the variable resistor.

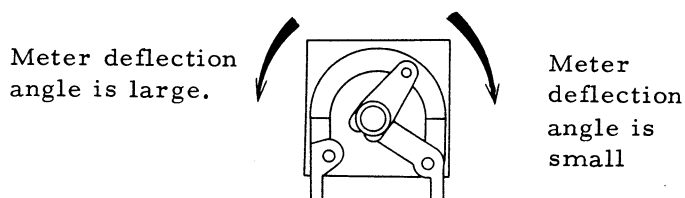


Fig. 22

n.b.: When the adjustment cannot be done with the variable resistor, adjust the Meter accuracy by changing the mounting position of the Galvanometer, with the Front Panel Unit detached.

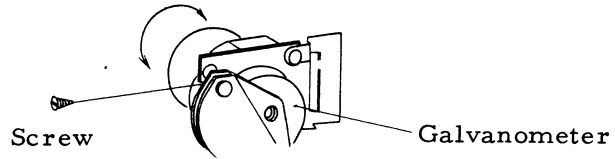


Fig. 23

Inspection

1) Inspection of low warning and high warning





Fig. 24



- A: Shutter release can not be effected.
- B: Shutter release may, or may not be effected.
- C: Shutter release must be effected.

2) Inspection of FA accuracy

ASA 100 1/30 Guide No. 16 (Shutter Ring is in AUTO position.)

- n.b.:
1. On the Guide No. 16, make the Contact for CANOLITE D ground to the BODY.
 2. Put the cap on the Lens.

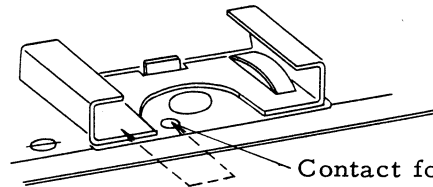


Fig. 25

Distance	F value	Standards
1m (3.5ft)	16	$\pm 1.5F$
2m (7ft)	8	$\pm 1.5F$
5m (15ft)	3.2 (between 2.8 and 4)	$\pm 1.5F$

The adjustment is to be made by changing the mounting position of the resistor.

3. Exchanging and Adjusting of View Finder

Work

Specifications


1. Adjustment of focus (Contrast focus)

Limit: ± 0.03

The focus should be within +2.5 to 5.5 on the 200mm T-type Collimator scale. (Set the focus mirror on the rail inside.)


2. Adjustment of parallax

Parallax should be within the limits of 80 to 90% against real picture.

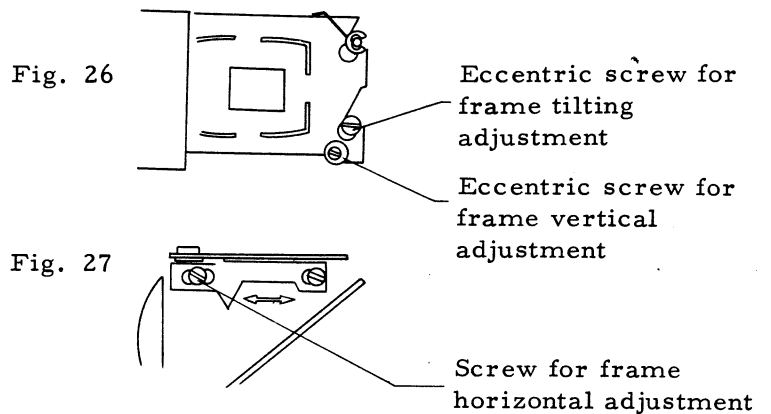


3. Adjustment of Range Finder


3.1 Adjustment of close distance

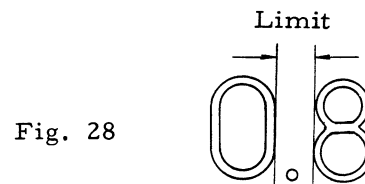

3.2 " ∞ " adjustment

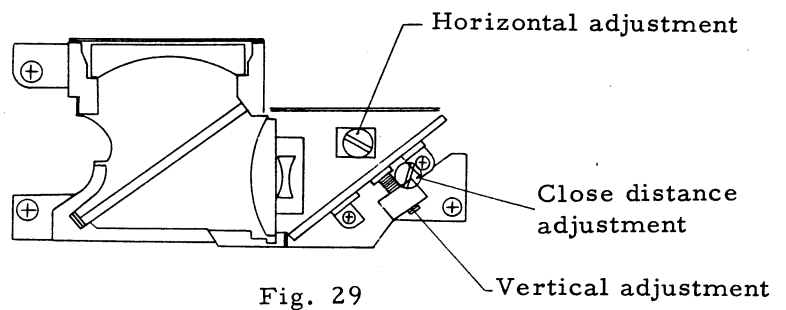


III. Circuit Diagram

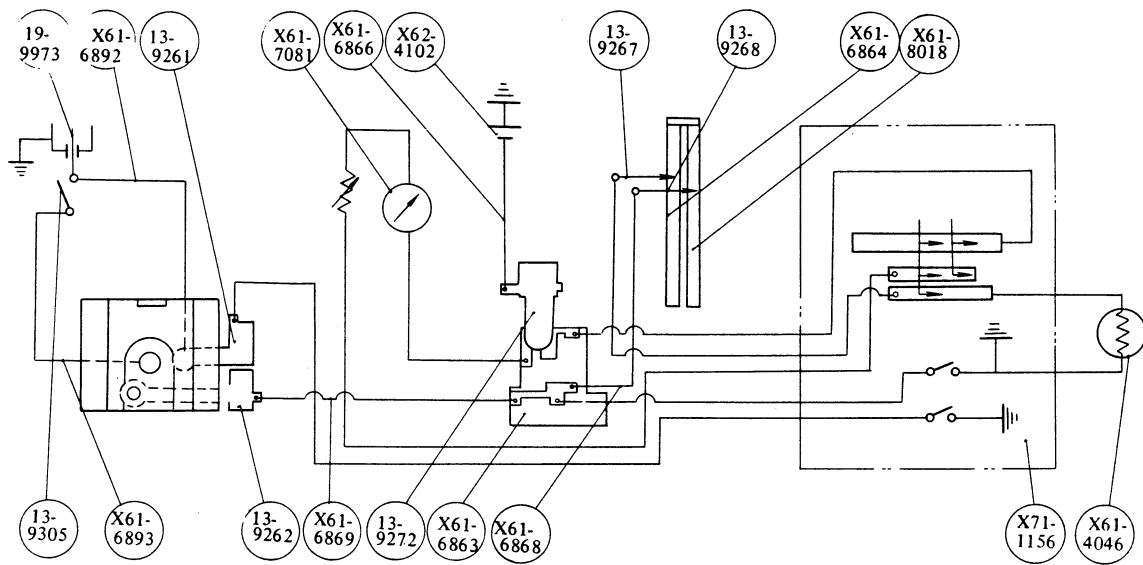

Parts No.	Description
X61-6866	Lead Wire (Black)
X61-6868	Lead Wire (Blue)
X61-6869	Lead Wire (Purple)
X61-6892	Lead Wire (Black)
X61-6893	Lead Wire (White)
X61-4046	CdS
X61-6863	Print Circuit Plate
X61-6864	Print Circuit Plate
X61-7081	Exposure Meter
X61-8018	Resistor
X62-4102	Mercury Battery
X71-1156	Shutter
13-9261	FA Contact
13-9262	FA Contact
13-9267	Contact
13-9268	Resistor
13-9272	Contact
13-9305	Terminal Contact
19-9973	Flash Terminal

Circuit Diagram of Exposure Meter

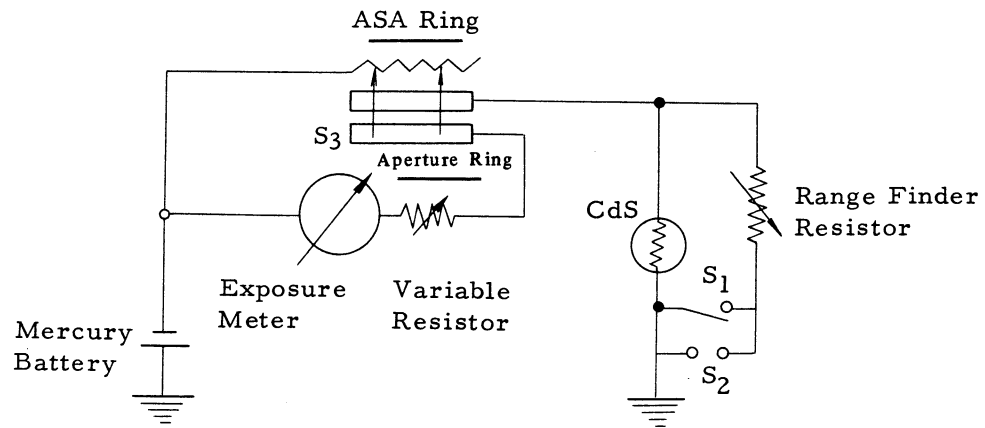

- S₁: Flash selector switch
- S₂: Terminal for CANOLITE D
- S₃: Manual selector switch




CANON SERVICE TOOLS LIST

CANONET QL 17
(REF NO. 1-30801)


TESTING EQUIPMENTS

<u>Use</u>	<u>Name of Testing Equipment</u>
Focus	1. 200mm T-type Collimator 2. Mirror for 35m/m
Field of View	1. Universal Parallax Collimator 2. Frosted Glass for Focus
Exposure Meter	1. Inspection Device for Canon Meter 2. Standard Checker-2 (CdS)

SPECIAL SCREWDRIVER

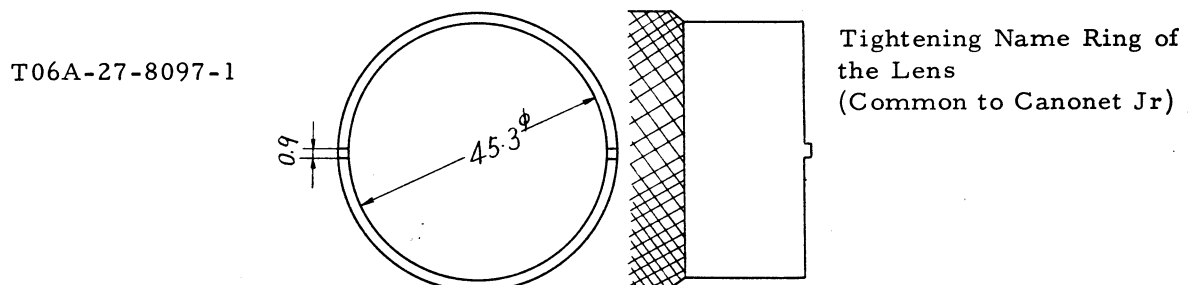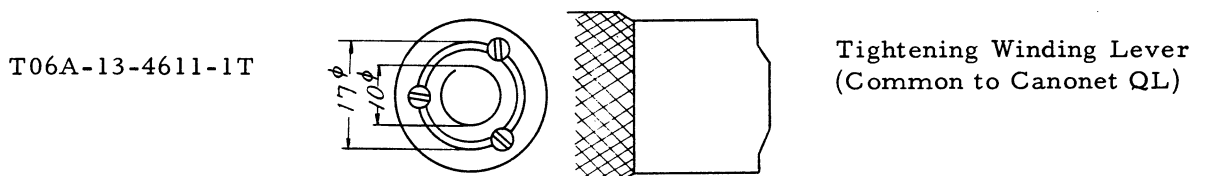
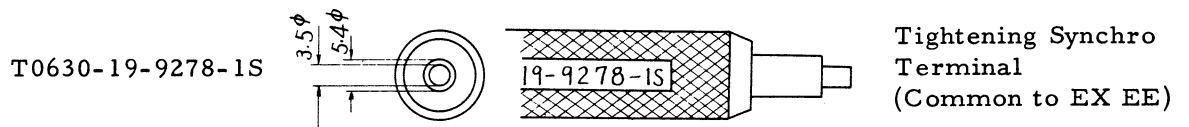


T0630-13-9245-2S

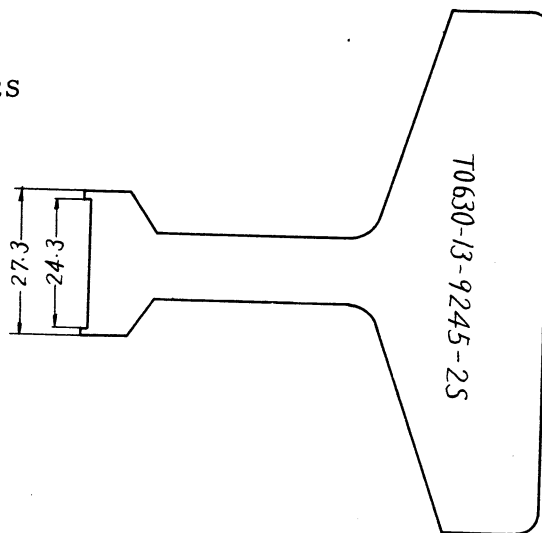



Tightening Rear Lens
Unit

T0630-13-9246-1T



Tightening Front Lens
Unit

T0630-27-8643-2S



Tightening Shutter
Unit

Alteration of each part of New Canonet QL 17.


1. Alteration of Aperture Scale Plate

1.1 Details

Because Light Shield of Aperture Scale Plate 19-0572 may hit a lug for mounting Accessory Shoe of Top Cover, the following step has been taken.

Temporary step:


Top portion of Light Shield has been cut.

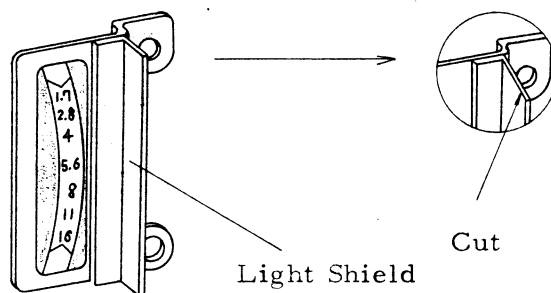

19-0572

Permanent step:

The shape of Light Shield has been changed as shown below.

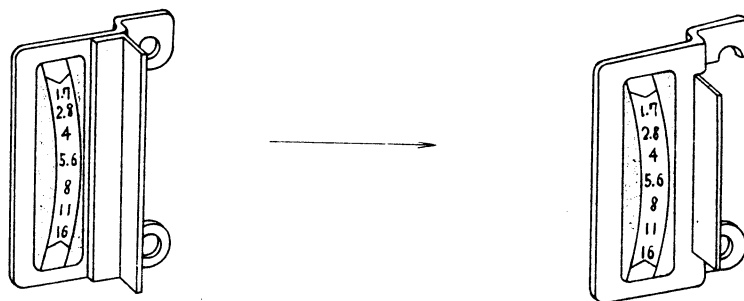

19-0572

19-0572-01

1.2 For repairing


Aperture Scale Plate in which the permanent step has been taken shall be in stock at the Service Parts Section.

With the old Aperture Scale Plate, if the Light Shield hits the Top Cover, it is advisable to cut the top of Light Shield with nippers.


2. Alternations of Rewind Bearing Metal and Rewind Fork

2.1 Details

In order to lessen the rewind torque, Rewind Bearing Metal 13-9167 and Rewind Fork 19-0053 have been changed as follows. As a result, the frictional force between Rewind Bearing and Spring 97-6093 has been minimized.



13-9167 → 13-9167-04

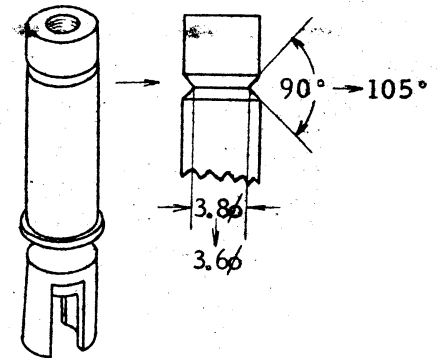

19-0053 → 19-0053-01

2.2 For repairing

The old and new parts are not interchangeable in principle.

When using the new Rewind Fork with the old Rewind Bearing Metal, Spring 97-6093 might not hold the shaft properly, but in operation this should cause no problem.

Consequently, it is unnecessary to replace Rewind Bearing Metal although Rewind Fork has been exchanged.


The new parts shall be in stock at the Service Parts Section.

3. Alteration of Shutter Assemble Collar

3.1 Details

In order to clamp the Shutter perfectly, or to permit easy removal of

Shutter Assemble Collar, the conventional right hand screw of Assemble Collar 27-8643 of Shutter has been changed to a left hand one. Accordingly, the threaded portion of Shutter too has been changed to the left.

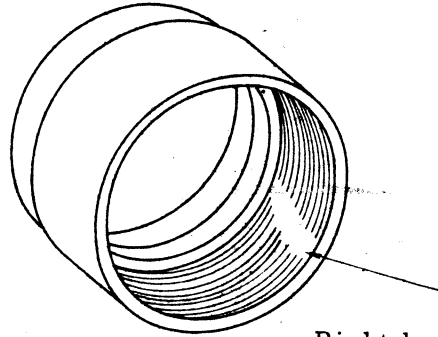

Right hand screw → Left hand screw

27-8643 → 27-8643-01

3.2 Repairing Procedure

There is no interchangeability between the old and new parts. Both the old and new Assemble Collars shall be in stock at the Service Parts Section.


For your information;

To detach the old Assemble Collar, it is advisable to apply Ketone about three times for 20 minutes between Assemble Collar and Helicoid, and to the threaded portions of Shutter and Assemble Collar.


4. Alterations of Connecting Lever and Shutter Release Plate

4.1 Details

The following three parts have been changed as shown below in order to prevent them from hitting the convex portion of Canon mark at the inside of Top Cover 19-0531; Shutter Release Plate 13-9135, Shutter Release Lever 19-0562 and Connecting Lever 13-9227.

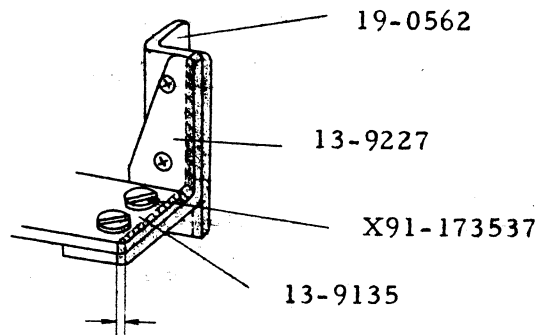


Connecting Lever

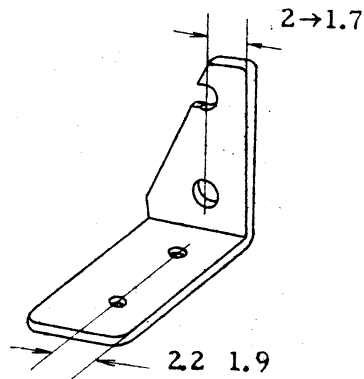


13-9227 13-9227-02

Shutter Release Plate



13-9135 13-9135-02

Shutter Release Lever



19-0562 19-0562-01

4-2 Repairing Procedure


When exchanging Top Cover of the camera in which the old Connecting Lever, Shutter Release Plate and Shutter Release Lever have been incorporated, flatten the convex portion of Canon mark with a file because that portion strikes the above three parts.

Also, even in the camera with new parts, the meter needle (clamp side) may hit "n", the final letter of "Canon", so cut only "n" with a file.

5. Alteration of Back Cover

5.1 Details

For the purpose of design simplification, Inner Frame of Back Cover 19-0532 has been discontinued.

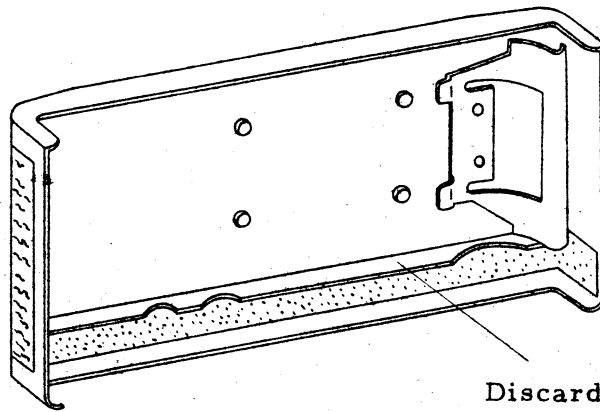


Discard this Inner Frame

When the test of light leakage was performed after discontinuation of Inner Frame, no problem was found.

6. Alteration of Cam Ring of film feeding indication mechanism

6.1 Details

To actuate the film feeding indication mechanism smoothly, Cam Ring 139133 and Pin 13-9281 have been changed as follows. Previously, there were three crests in Cam of Cam Ring but now it has been changed to two crests. Therefore, when completing one revolution of the old Cam Ring, the film feeding indication plate traverses three times. It traverses two times with the new ring.

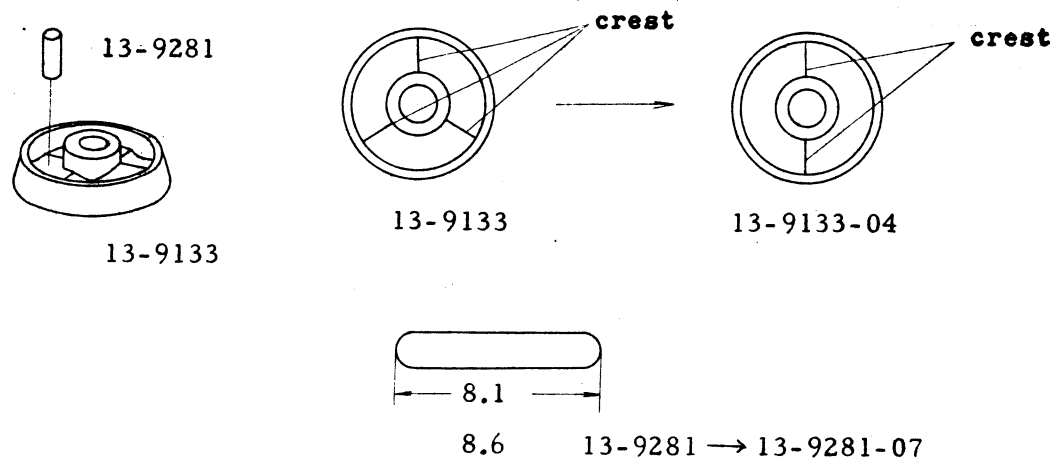



6.2 Repairing Procedure

There is no interchangeability between the old and new parts. Stored at the Service Parts Section are both the old and new Pins, and only the new Cam Ring for a while. If an old Cam Ring must be changed to a new one, change the pin also.

7. Alteration of Lock Lever


7.1 Details

Because a short may be caused on switch Contact 13-9305 of Flash Terminal mounted on the side of Top Cover and Lock Lever 19-0554 the coil spring shaft of Lock Lever has been moved away from the Contact. Simultaneously, Lock Lever Shaft Holder 13-9173 too has been changed.

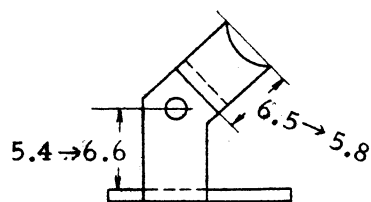


19-0554 → 19-0554-01

Lock Lever Shaft Holder



13-9173



13-9173-02

Discontinued through this alteration are;

Insulator Collar mounted between Lock Lever Shaft Holder 13-9173 and Coil Spring 97-5608, and Insulator Tape stuck on Switch Contact 13-9305 of Flash Terminal.

7.2 Repairing Procedure


There is no interchangeability between the old and new parts. New parts shall be in store at the Service Parts Section. Insulator Collar as well as Insulator Tape should be used for the camera provided with the old parts.

8. Poor opening and closing of Mercury Battery Cover

8.1 Details

When opening Mercury Battery Cover, if it is pushed too far in "OPEN"

direction, the Cover goes between Bottom Cover and Mercury Battery Chamber and Spring 97-7600 weakens, resulting in poor opening and closing. To prevent this, such temporary measure has been taken that through provision of Washer X32-502123 between Main Body and Mercury Battery Chamber, the clearance between Mercury Battery Chamber and Bottom Cover is narrowed so that Mercury Battery Cover does not get in there. Moreover, for a permanent measure, the Cover shape will be changed.

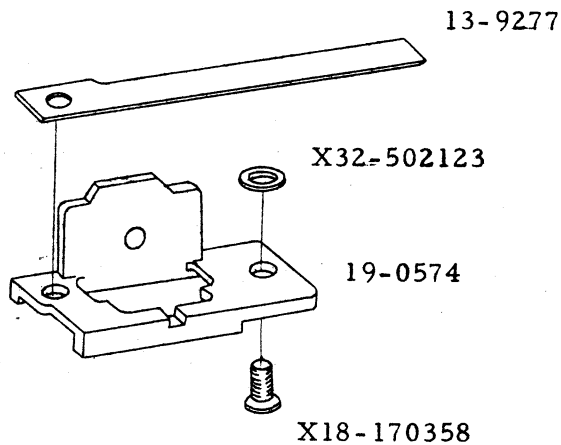


8.2 Repairing Procedure

For the camera whose Mercury Battery Cover works poorly, it is good enough to provide Washer X32-502123.

9. Alteration of Mercury Battery Chamber

9.1 Details

Mercury Battery Chamber has been changed in shape to prevent light leakage from the Chamber. To ensure further safety, Light Shield 13-9325 has been provided.

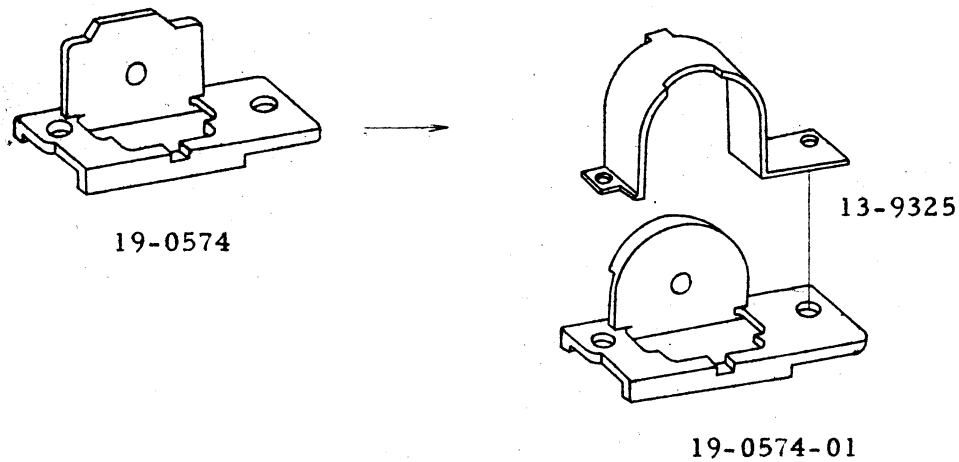


9.2 For repairing

New parts shall be in store at the Service Parts Section.

For the camera with light leakage from its Mercury Battery Chamber, it is enough to put in the new Chamber together with the Light Shield.

10. Alteration of Rewind Fork

10.1 In order to prevent Rewind Fork from being deformed or broken, the Fork has been thickened as shown below to increase its strength. This is a temporary measure.

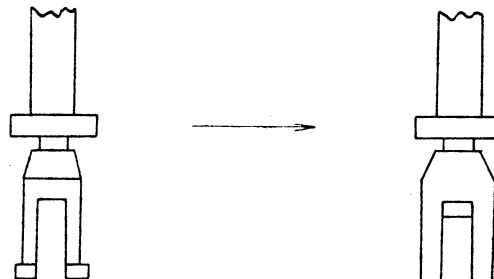

10.2 For repairing

The new part shall be in store at the Service Parts Section.

If Rewind Fork should be deformed or broken, replace it with the new one.

Alteration of Cassette Presser of New Canonet QL 17


1. Details

If Rewind Fork should be deformed or broken, Rear Cover will not open. To avoid this, the shape of Cassette Presser has been changed. The Rewind Fork might be deformed or broken by exceptional torque being applied in the film winding and rewinding operations with the Rear Cover closed and the Cassette loaded on Main Body as shown Figs. 1 and 2.


Such trouble is found often only in the New Canonet QL 17.

It is deemed attributable to the following:

- (1) Because the camera is compact, the film leader section is easily fed too far. In that condition, the user may shut Rear Cover carelessly since he is usually paying attention to QL mechanism.
- (2) In other cameras, Cassette turns to the proper position at another winding even if set as shown in Fig. 2, while in New Canonet QL 17, Cassette is caught by Cassette Presser.

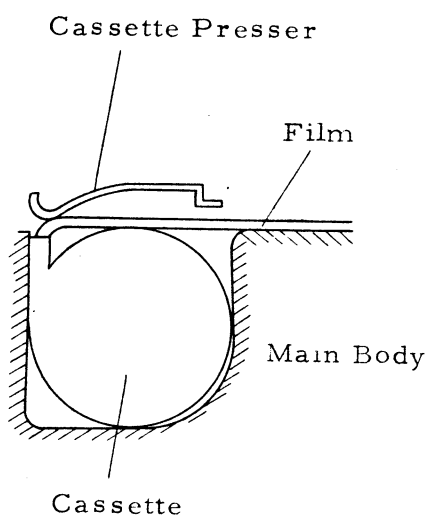


(Fig. 1)

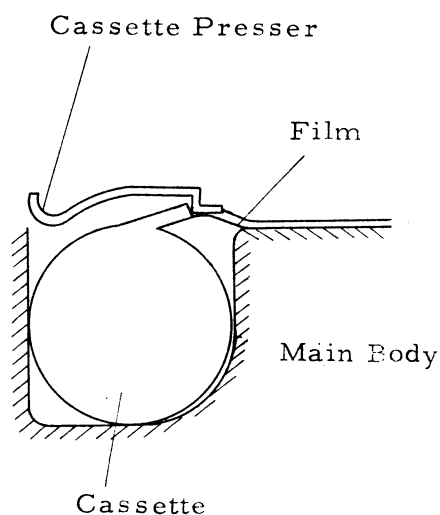

(Fig. 2)

1.1 Temporary procedure



Cassette Presser has been changed to the one for the old Canonet QL so that Cassette is set at the normal position when winding the film in spite of the film outlet of Cassette having hit Cassette Presser. See Fig. 1



Cassette Presser for
old Canonet QL

1.2 Permanent procedure

The shape of Cassette Presser has been changed. By this change, the Rear Cover will be hard to close under the condition Shown in Fig. 1.

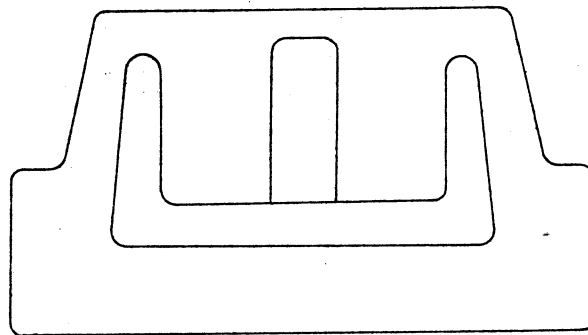


Alteration to the New Canonet QL 17

1. Details

1.1 Change of Winding Lever

When winding the film, you may feel some pain in your thumb, so that portion of the Lever touching your thumb has been changed. By the change, Winding Lever has been **lengthened**, resulting in obtaining smooth winding.

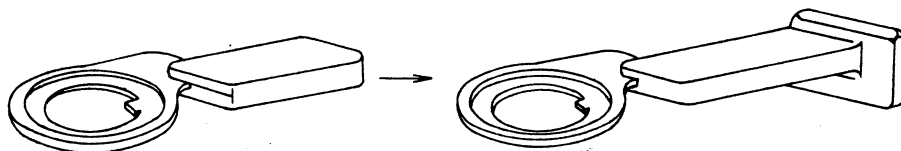

1.2 Change of Connecting Plate 13-9227

If Connecting Plate 13-9227 should bend, Shutter release position results in being deepened. To prevent this, the Plate has been hardened in the cementation process. The Plate, after hardening, is metallized with BN.

1.3 Change of Screw

Noticeable change is found in Screw because the Service Manual has been renewed. Therefore, the correction is recommended referring to the dismounting drawing supplied.

2. For repairing

New parts shall be in stock at the Service Parts Section.

Moreover, for a strong claim, replacement of the old parts with the new ones is sufficient.

2. For repairing

At the Service Parts Section, Rear Covers in which the temporary measure has been taken shall be in stock until enforcement of the premanent measure.

For a user whose camera has a deformed Winding Fork, a detailed explanation of how to load film should be given.



Moreover, for a big claim, exchange of the Rear Cover is recommended.

Alterations of Top Cover and Mercury Battery Cover of New Canon QL 17

1. Details

- 1.1 In such cameras it is sometimes found that when Screw (X19-170306) at the rear side of Top Cover (19-0531) is fastened, the range finder dislocates.

This is because that fastening this screw causes the pillar (provided for fastening Screw) of the Main Body to be tugged, resulting in tilting of the range finder mirror. To prevent this, the Screw position has been moved right, as shown in Figure below.

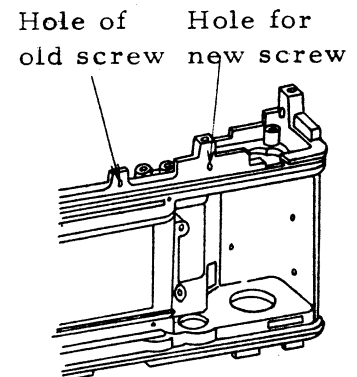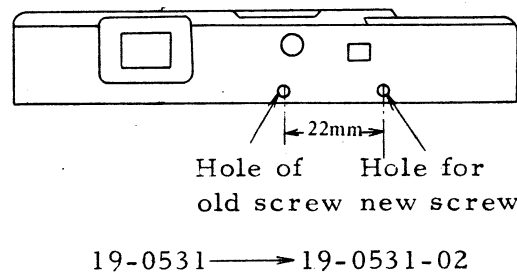


19-0530


1.2 Change of Mercury Battery Cover

Up to now, the plate marked "OPEN" has been stuck on the Cover but because the plate easily comes off, the Cover shape has been changed and the plate is no longer stuck on the Cover.

Because of this change, no suggestion is provided about how the Battery is inserted. Instructions for insertion and removal have been put on Plate (13-9277).

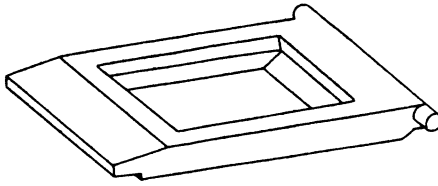

19-0575 → 13-9276



13-9277 → 19-0575

2. Repairing Procedures

2.1 Change of Top Cover

Both old and new parts are not interchangeable.

At the Service Parts Section, old and new Top Covers, and only new Main Body are stocked.

2.2 Change of Mercury Battery Cover

Both old and new parts are interchangeable.

However, the Battery removal plate too should be exchanged whenever the Cover is replaced.

Canon SERVICE MANUAL REPORT

Serial No. AC 28-027 E

Service Manual No. C-028

Issued by Camera Service Department, Canon Inc.

Date 1971 / 5 / 25

Canon NEW CANONET QL 19 Winding Upper Plate Part Number Change

1. Change

The Canonet QL 19 has used Winding Upper Plate(19-0534) which was also used on the original New Canonet(1-30801). It now uses Winding Upper Plate(19-0896) used on the New Canonet L(1-30805). This change is possible because the shutter charge index, which is not used on the QL 19, is now attached with a screw instead of riveting(AC28-026E)

2. Classification


This change is effective from camera body number 212241.

Canon NEW CANONET QL 17, 19 Changes

1. Diaphragm Mechanism

1.1 Change

To improve the function of the meter unit diaphragm lever and the shutter unit diaphragm pin, their start position has been changed.

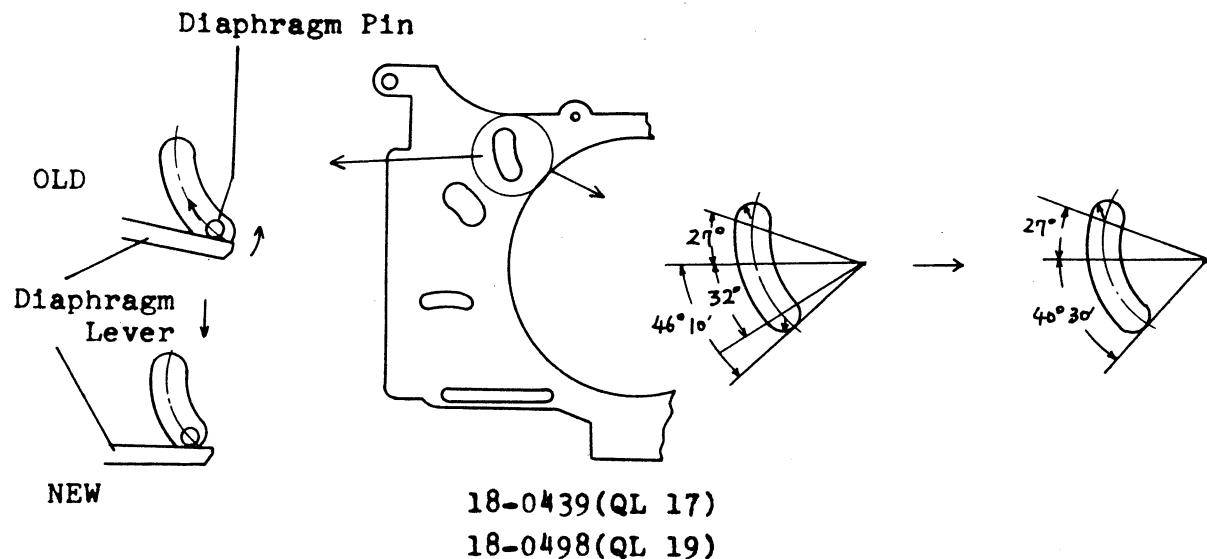

1.2 Repair

Old and new parts are normally interchangeable, but some old shutter units will not open fully with the new front panel. All new shutters will work with the old front panel. Camera Service will stock only new parts.

1.3 Classification

QL 17 : From Body No. 565,501

QL 19 : From Body No. 244,581

2. Contact Holder(13-9264)

2.1 Change

The foam plastic insulator [Contact Holder(13-9264)] has been replaced with vinyl tape. See the Repair Manual, pg.. 2.

2.2 Repair

13-9264 will be stocked until the stock is depleted. Use of it or black vinyl tape is optional.


2.3 Classification

QL 17 : From Body No. 586,621
QL 19 : From Body No. 249,901

3. Film Counter Window

3.1 Change

Film Counter Window(13-9280) and Counter Window Frame(13-9330) have been combined into a single part Film Counter Window (13-9280).

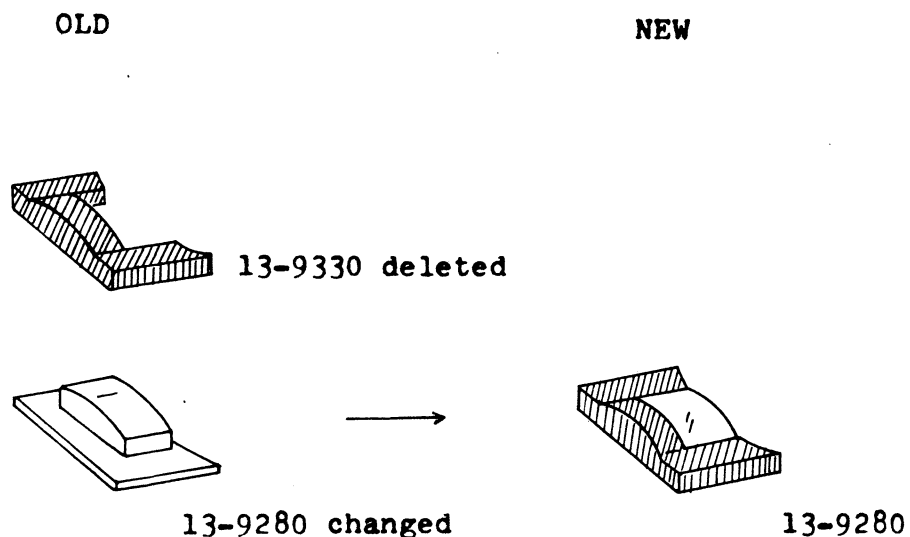

3.2 Repair

Old and new parts are interchangeable. Camera Service will stock only the new single part which replaces both old parts.


3.3 Classification

QL 17 : From Body No. 620,001
QL 19 : From Body No. 260,001

Canon NEW CANONET QL 17, QL 19 Rangefinder Mirror Improvement

1. Change

To decrease the pressure on Adjustment Screw(13-9176) so that it does not loosen and change the ∞ adjustment, the Mirror Base(13-9175) mounting position on Finder Box(19-0533) has been lowered 1 mm by making the finder box casting 1mm thinner where the mirror base mounts. This moves the screw farther from the pivot point and lowers the pressure against the screw. The mirror is moved up 1mm on the mirror base so it remains in the same position.

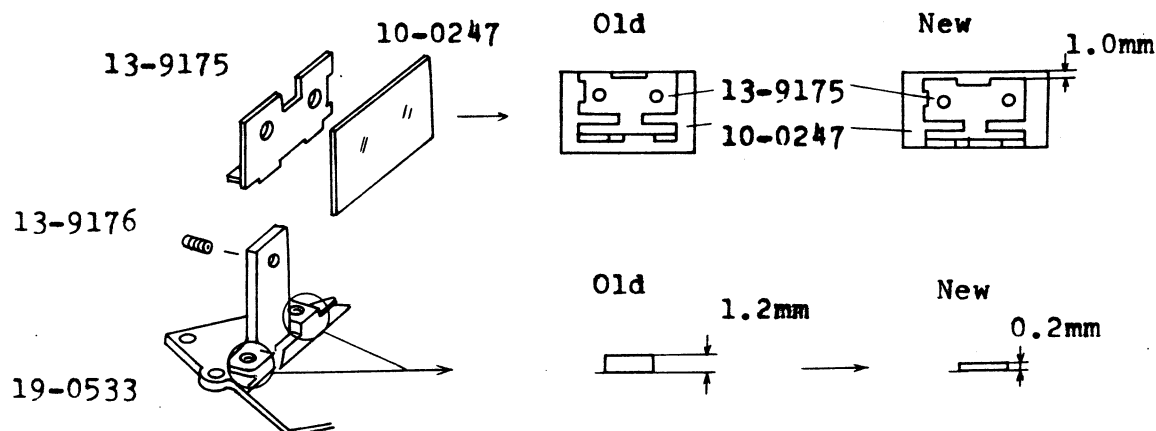

2. Repair Old and new parts are interchangeable providing the mirror is mounted correctly. Camera Service will stock only new parts.

When gluing the mirror to the Mirror Base(13-9175), position the top of the base one millimeter below the top of the mirror when using the new Finder Box(19-0533).

3. Classification

This change is effective from:

QL 17, camera body number 631261

QL 19, camera body number 251561

Canon SERVICE MANUAL REPORT

Serial No. AC 28-034 E

Service Manual No. C-009

Issued by Camera Service Department, Canon Inc.

Date 1971 / 10 / 12




Canon CANONET QL17, QL19 Changes

1. Counter Window Change

1.1 Change

To improve the appearance and simplify the manufacturing process, Counter Window(13-9280) has been changed by reversing the clear and opaque parts of the window.

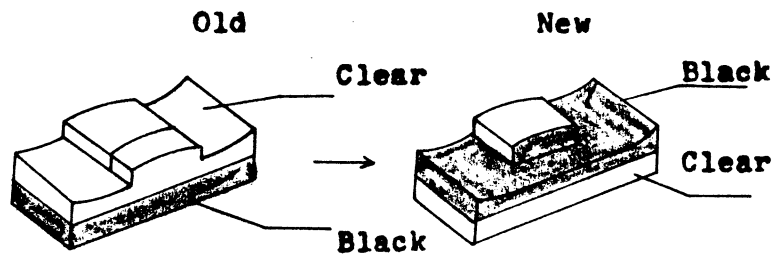

1.2 Repair

Old and new parts are interchangeable. Camera Service will stock new parts only, when present stock is deleted.

1.3 Classification

The change is effective from body number:

QL17---659001

QL19---278601


2. Sprocket Key Screw Change

2.1 Change

To prevent frame overlap, one of the two Key Screws(X91-142525) in Rewind Button(13-9130) has been changed. The new Key Screw (X91-142534) has a larger head and is black nickel plated instead of bright nickel.

X91-142534(Added)

X91-142525

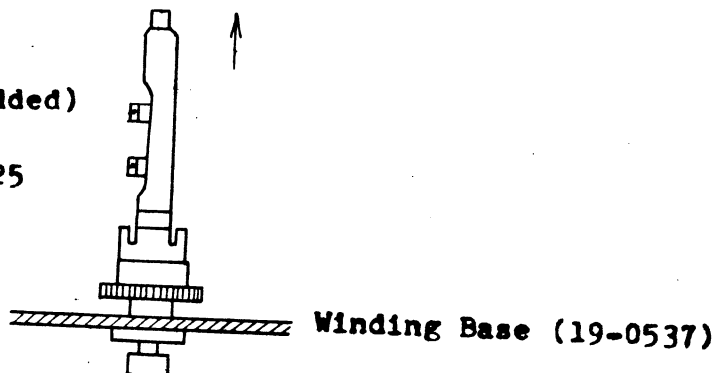

2.2 Repair

Old and new parts are interchangeable. If a camera has an overlap problem, replace the old screw with the new type. Camera Service will stock both type screws and one old and one new screw should be used in each camera.

2.3 Classification

This change is factory installed on cameras from body numbers:


QL17---659621

QL19---280361

3. Flash Terminal Change

3.1 Change

To prevent accidental "open flash" when using direct contact flash units, the shape and material of the insulating part of Flash Terminal(13-9208) has been changed. A raised collar has been added around the syncro terminal. The material has also been changed from ABS to Polycarbonate.

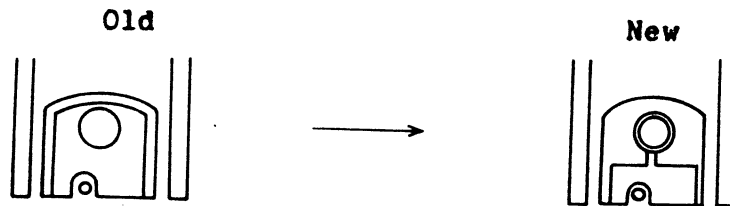

3.2 Repair

Old and new parts are interchangeable. Camera Service will stock new parts only.

3.3 Classification

The change is factory installed on cameras from body numbers:

QL17---659621

QL19---279121

Canon SERVICE MANUAL REPORT

Serial No. AC28-035 E

Service Manual No. C-028

Issued by Camera Service Department, Canon Inc.



Date 1971 / 10 / 20



New Canonet QL 17, QL 19 Winding Base Change

1. Change

Changes have been made so the Ratchet Lever(13-9129) releases more smoothly when the winding lever is advanced after rewind. Ratchet Lever(13-9129) and Winding Base(19-0537) are the only parts effected in the latest change, but there was an earlier change which effected several parts. See the drawings on the next page .

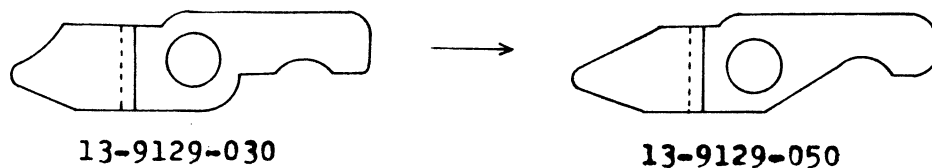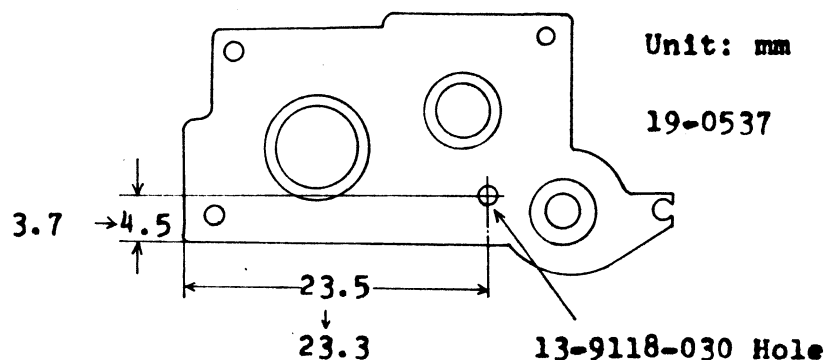

2. Repair

Old and new parts are not interchangeable. The ratchet lever (new type) will not return when used on an old base plate. Camera Service will stock all three ratchet levers. See next page for details.

3. Classification

This change is effective from body number:

QL 17 -- 397001

1st Type QL 17 Body No. 100001 ~ 210000	2nd Type Body No. 210001 ~ 397000	3rd Type Body No. 397001 ~
		Note: Other parts are the same as 2nd type.
Note: Old type 19-0537 is not stocked. Other Parts are all stocked. If 19-0537 is replaced with the new type, all parts must be changed.		

Canon SERVICE MANUAL REPORT



Serial No. AC28-032 E

Service Manual No. C-028


Issued by Camera Service Department, Canon Inc.

Date 1971 / 11 / 19

Canon NEW CANONET QL 17, 19 Finder Improvement

1. Change

To improve appearance of the finder, the information masks have been changed as shown.

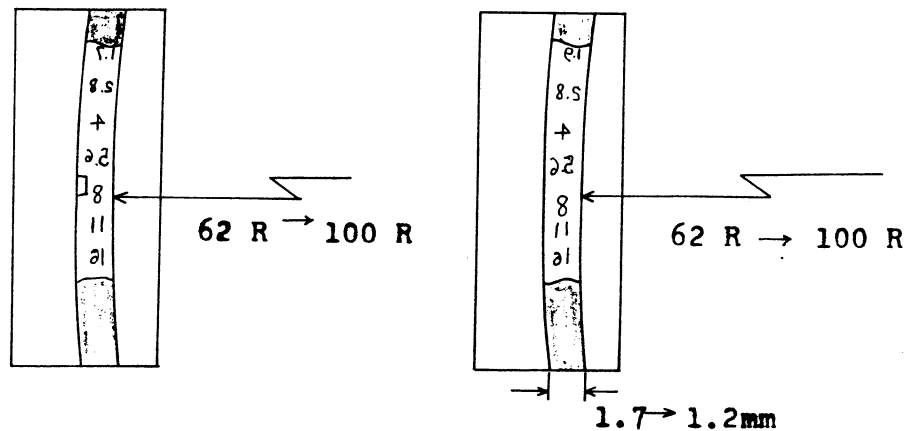

QL17 (19-0572)
QL17L (19-0897)

QL19 (19-0717)

2. Repair

Old and new parts are interchangeable. Camera Service will continue to stock old parts until the stock is depleted.

3. Classification

Cameras have new parts from serial numbers:

QL 17 : 640001


QL 19 : 270001

CANON REPAIR MANUAL

SHUTTER for NEW CANONET QL 17 **(REF. NO. 1-30801)**


CANON INC. JAPAN

EXPLODED VIEW
of
SHUTTER for NEW CANONET QL 17

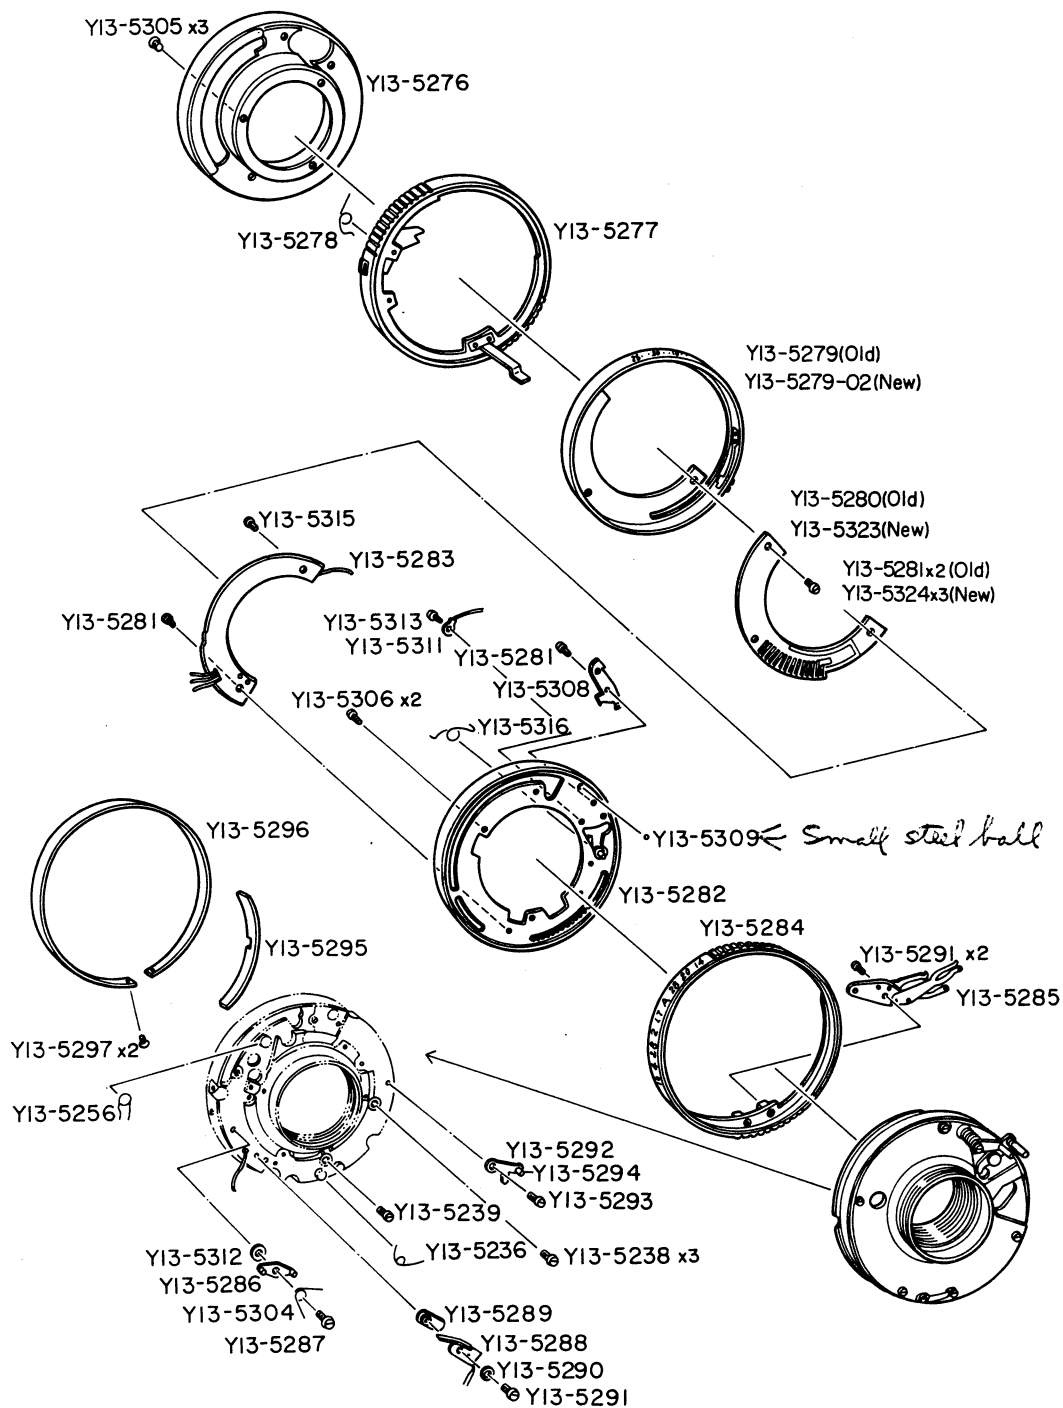

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ス プ リ ン グ	E	Y13-5236	1	Spring
ビ	E	Y13-5238	3	Screw
ス プ リ ン グ	E	Y13-5239	1	Screw
前 リ ン グ	E	Y13-5256	1	Spring
	D	Y13-5276	1	Hood Ring
シャッタースピード環	E	Y13-5277	1	Shutter Speed Ring
ス プ リ ン グ	E	Y13-5278	1	Spring
A S A 環	E	Y13-5279	1	Film Speed Ring
抵抗基板	D	Y13-5280	1	Resistor Plate
ス	E	Y13-5281	4	Screw
指 標 環	E	Y13-5282	1	Marking Ring
ブ リ ン ト 板	E	Y13-5283	1	Print Circuit Plate
絞 リ 環	E	Y13-8284	1	Aperture Scale Ring
接 片 ユ ニ ッ ト	E	Y13-5285	1	Contact Assembly
ス イ ッ チ レ バ ー	E	Y13-5286	1	Switch Lever
ス	E	Y13-5287	1	Screw
接 片	E	Y13-5288	1	Contact
絶 縁 板	E	Y13-5289	1	Insulator
絶 縁 板	E	Y13-5290	1	Insulator
ス	E	Y13-5291	3	Screw
マ ニ ュ ア ル レ バ ー	E	Y13-5292	1	Manual Lever
ス	E	Y13-5293	1	Screw
調 整 ビ ス	E	Y13-5294	1	Adjusting Screw
ダ ス ト カ バ ー	E	Y13-5295	1	Dust Cover
ネ ー ム プ レ ー ト	E	Y13-5296	1	Name Plate
ス	B	Y13-5297	2	Screw
ス プ リ ン グ	E	Y13-5304	1	Spring
ス	E	Y13-5305	3	Screw
ス	E	Y13-5306	2	Screw
板 ス プ リ ン グ	E	Y13-5308	1	Plate Spring
ス チ ー ル ボ ー ル	D	Y13-5309	1	Steel Ball
リ ー ド 線	E	Y13-5311	1	Lead
ワ ッ シ ン ー	E	Y13-5312	1	Washer
ス	E	Y13-5313	1	Screw
ス	E	Y13-5315	1	Screw
ス プ リ ン グ	E	Y13-5316	1	Spring
抵抗基板	D	Y13-5323	1	Resistor Plate
ス	E	Y13-5324	3	Screw

EXPLODED VIEW
of
SHUTTER for NEW CANONET QL 17

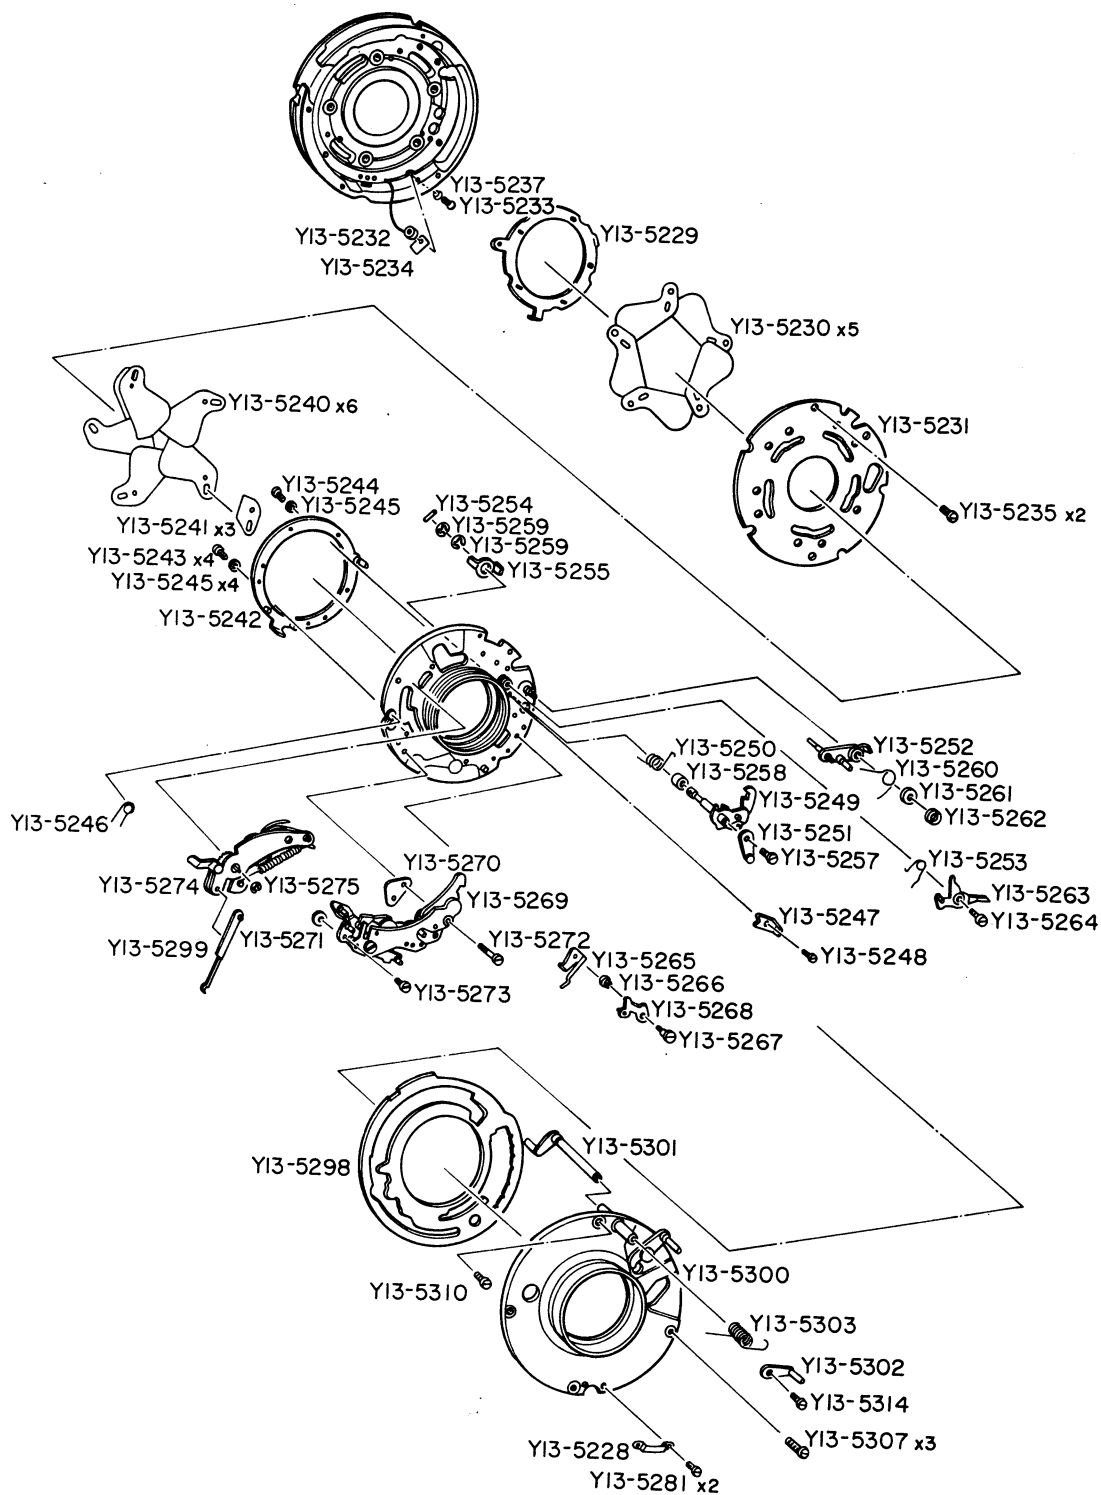

PARTS LIST

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
リード線押え	E	Y13-5228	1	Lead Wire Holder
絞りコントロール環	E	Y13-5229	1	Diaphragm Control Ring
絞り羽根	D	Y13-5230	5	Diaphragm Blade
中間板	E	Y13-5231	1	Blade Retaining Panel
シンクロリード線	E	Y13-5232	1	Flash Lead Wire
ビス	E	Y13-5233	1	Screw
絶縁テープ	E	Y13-5234	1	Insulator Tape
ビス	E	Y13-5235	2	Screw
絶縁板	E	Y13-5237	1	Insulator
シャッター羽根	D	Y13-5240	6	Shutter Blade
シャッター補助羽根	D	Y13-5241	3	Sub Shutter Blade
シャッター羽根押え	E	Y13-5242	1	Blade Holder
ビス	E	Y13-5243	4	Screw
ビス	E	Y13-5244	1	Screw
ワッシャー	E	Y13-5245	5	Washer
スプリング	E	Y13-5246	1	Spring
テンションストッパー	E	Y13-5247	1	Tension Stopper
ビス	E	Y13-5248	1	Screw
コッキングレバー	E	Y13-5249	1	Main Cocking Lever
スプリング	E	Y13-5250	1	Spring
コッキングレバー	E	Y13-5251	1	Cocking Lever
リリースレバー	E	Y13-5252	1	Release Lever
スプリング	E	Y13-5253	1	Spring
ピン	E	Y13-5254	1	Pin
絞り固定レバー	E	Y13-5255	1	Aperture Set Lever
ビス	E	Y13-5257	1	Screw
カラ	E	Y13-5258	1	Collar
緊定ワッシャー	E	Y13-5259	1	Retaining Washer
スプリング	E	Y13-5260	1	Spring
ワッシャー	E	Y13-5261	1	Washer
ナット	E	Y13-5262	1	Nut
バルブロックレバー	E	Y13-6263	1	B Lock Lever
ビス	E	Y13-5264	1	Screw
X接片	E	Y13-5265	1	X Contact
絶縁板	E	Y13-5266	1	Insulator
ビス	E	Y13-5267	1	Screw
X接片	E	Y13-5268	1	X Contact
スローガバナー	D	Y13-5269	1	Slow Governor Unit
ワッシャー	E	X13-5270	E	Washer
ワッシャー	E	X13-5271	1	Washer
ビス	E	X13-5272	1	Screw
ビス	E	Y13-5273	1	Screw
ヤルフタイマー	D	X13-5274	1	Self Timer Unit
緊定ワッシャー	E	X13-5275	1	Retaining Washer
ビス	E	X13-5281	2	Screw
中板	E	X13-5298	1	Inner Panel
クリックスプリング	E	X13-5299	1	Click Spring
後板	E	X13-5300	1	Rear Panel
EE軸	E	Y13-5301	1	EE Shaft
EEレバー	E	Y13-5302	E	EE Lever
スプリング	E	Y13-5303	1	Spring
ビス	E	Y13-5307	3	Screw
ビス	E	Y13-5310	1	Screw
ビス	E	Y13-5314	1	Screw

INDEX OF PARTS NUMBERS


PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE
Y13-5228	2	Y13-5278	1				
Y13-5229	2	Y13-5279	1				
Y13-5230	2	Y13-5280	1				
Y13-5231	2	Y13-5281	1, 2				
Y13-5232	2	Y13-5282	1				
Y13-5233	2	Y13-5283	1				
Y13-5234	2	Y13-5284	1				
Y13-5235	2	Y13-5285	1				
Y13-5236	1	Y13-5286	1				
Y13-5237	2	Y13-5287	1				
Y13-5238	1	Y13-5288	1				
Y13-5239	1	Y13-5299	1				
Y13-5240	2	Y13-5290	1				
Y13-5241	2	Y13-5291	1				
Y13-5242	2	Y13-5292	1				
Y13-5243	2	Y13-5293	1				
Y13-5244	2	Y13-5294	1				
Y13-5245	2	Y13-5295	1				
Y13-5246	2	Y13-5296	1				
Y13-5247	2	Y13-5297	1				
Y13-5248	2	Y13-5298	2				
Y13-5249	2	Y13-5299	2				
Y13-5250	2	Y13-5300	2				
Y13-5251	2	Y13-5301	2				
Y13-5252	2	Y13-5302	2				
Y13-5253	2	Y13-5303	2				
Y13-5254	2	Y13-5304	1				
Y13-5255	2	Y13-5305	1				
Y13-5256	1	Y13-5306	1				
Y13-5257	2	Y13-5307	2				
Y13-5258	2	Y13-5308	1				
Y13-5259	2	Y13-5309	1				
Y13-5260	2	Y13-5310	2				
Y13-5261	2	Y13-5311	1				
Y13-5262	2	Y13-5312	1				
Y13-5263	2	Y13-5313	1				
Y13-5264	2	Y13-5314	2				
Y13-5265	2	Y13-5315	1				
Y13-5266	2	Y15-5316	1				
Y13-5267	2	Y13-5323	1				
Y13-5268	2	Y13-5324	1				
Y13-5269	2						
Y13-5270	2						
Y13-5271	2						
Y13-5272	2						
Y13-5273	2						
Y13-5274	2						
Y13-5275	2						
Y13-5276	1						
Y13-5277	1						

CANON REPAIR MANUAL

SHUTTER for CANON BLACK CANONET QL 17
(REF. NO. 1-30802)

CANON INC. JAPAN

EXPLODED VIEW
of
SHUTTER for CANON BLACK CANONET QL 17

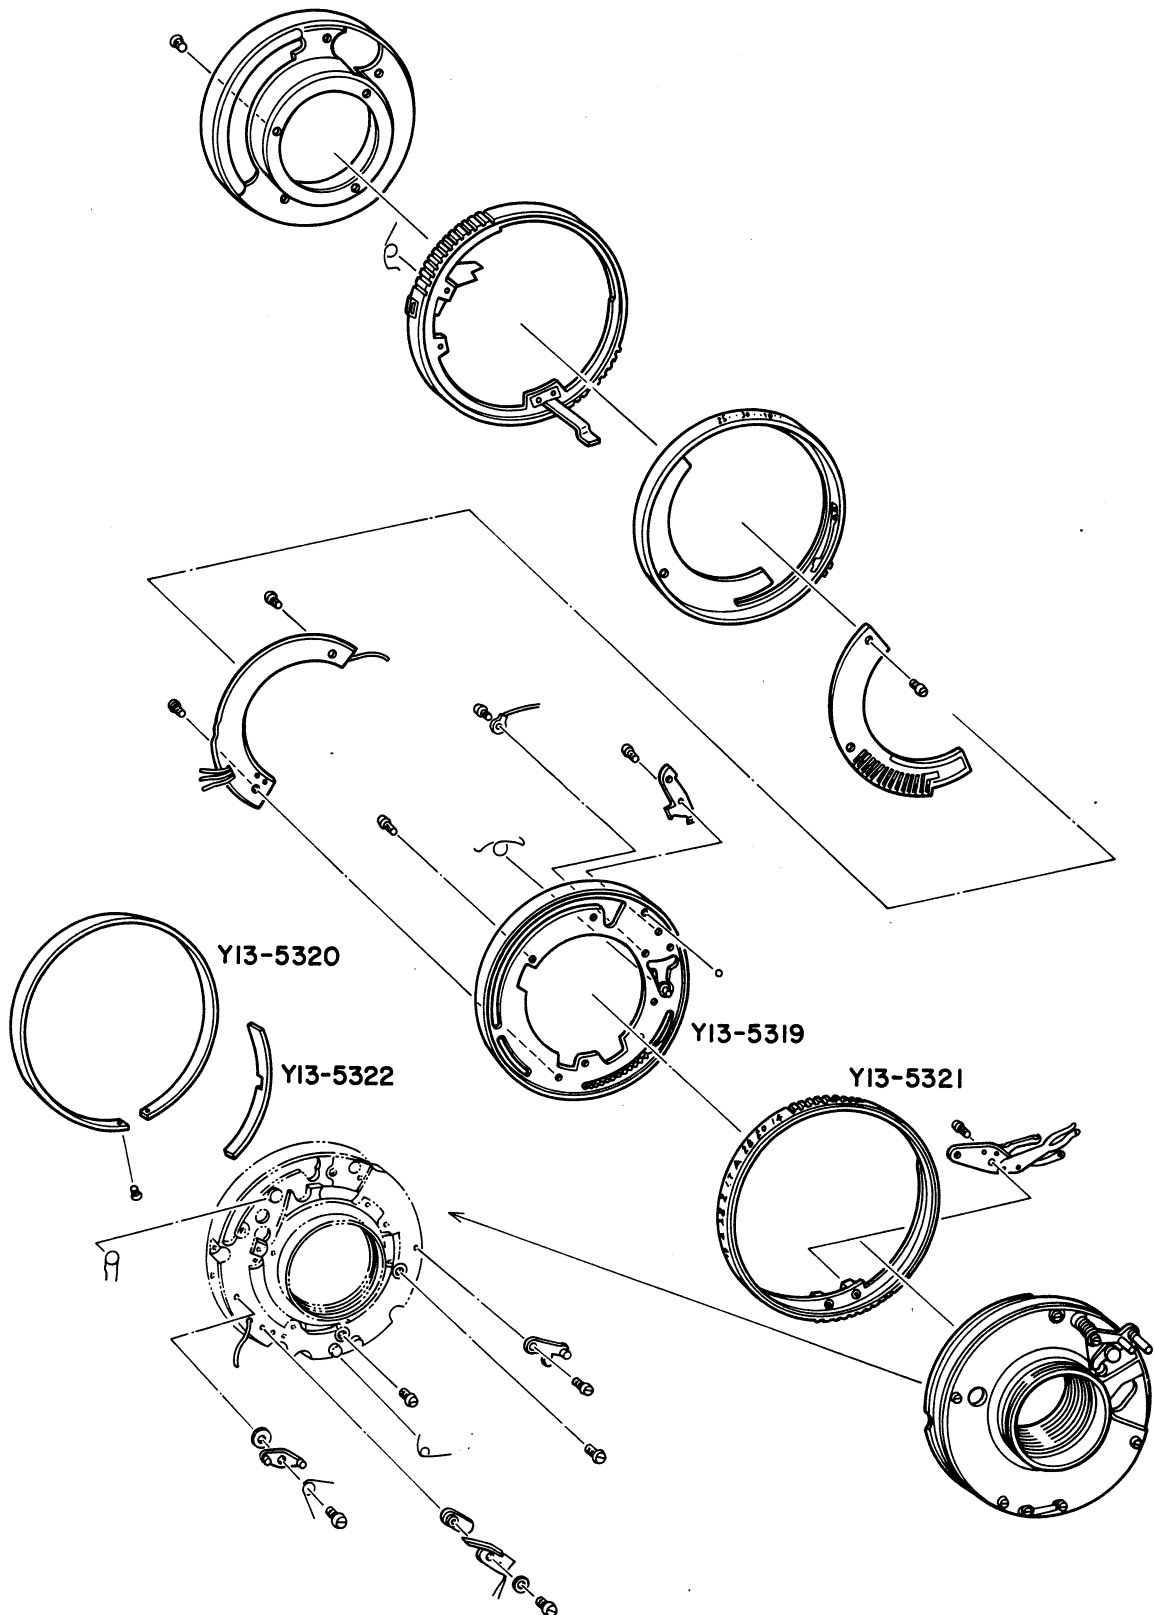

The shutter for the CANON BLACK CANONET QL 17 is the same as the shutter for the CANON CANONET QL 17, with the exception of the parts in this list.

For any parts not listed, refer to the repair manual for the shutter of CANON CANONET QL 17.

PARTS LIST


部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
指 標 環	D	Y13-5319	1	Marking Ring
ネ ー ム プ レ ー ト	C	Y13-5320	1	Name Plate
絞 リ 目 盛 環	C	Y13-5321	1	Aperture Scale Ring
ダ ス ト カ バ ー	D	Y13-5322	1	Dust Cover

CANON REPAIR MANUAL

CANON NEW CANONET QL 19
(REF. NO. 1-30811)

CANON INC. JAPAN

EXPLODED VIEW
of
CANON NEW CANONET QL 19

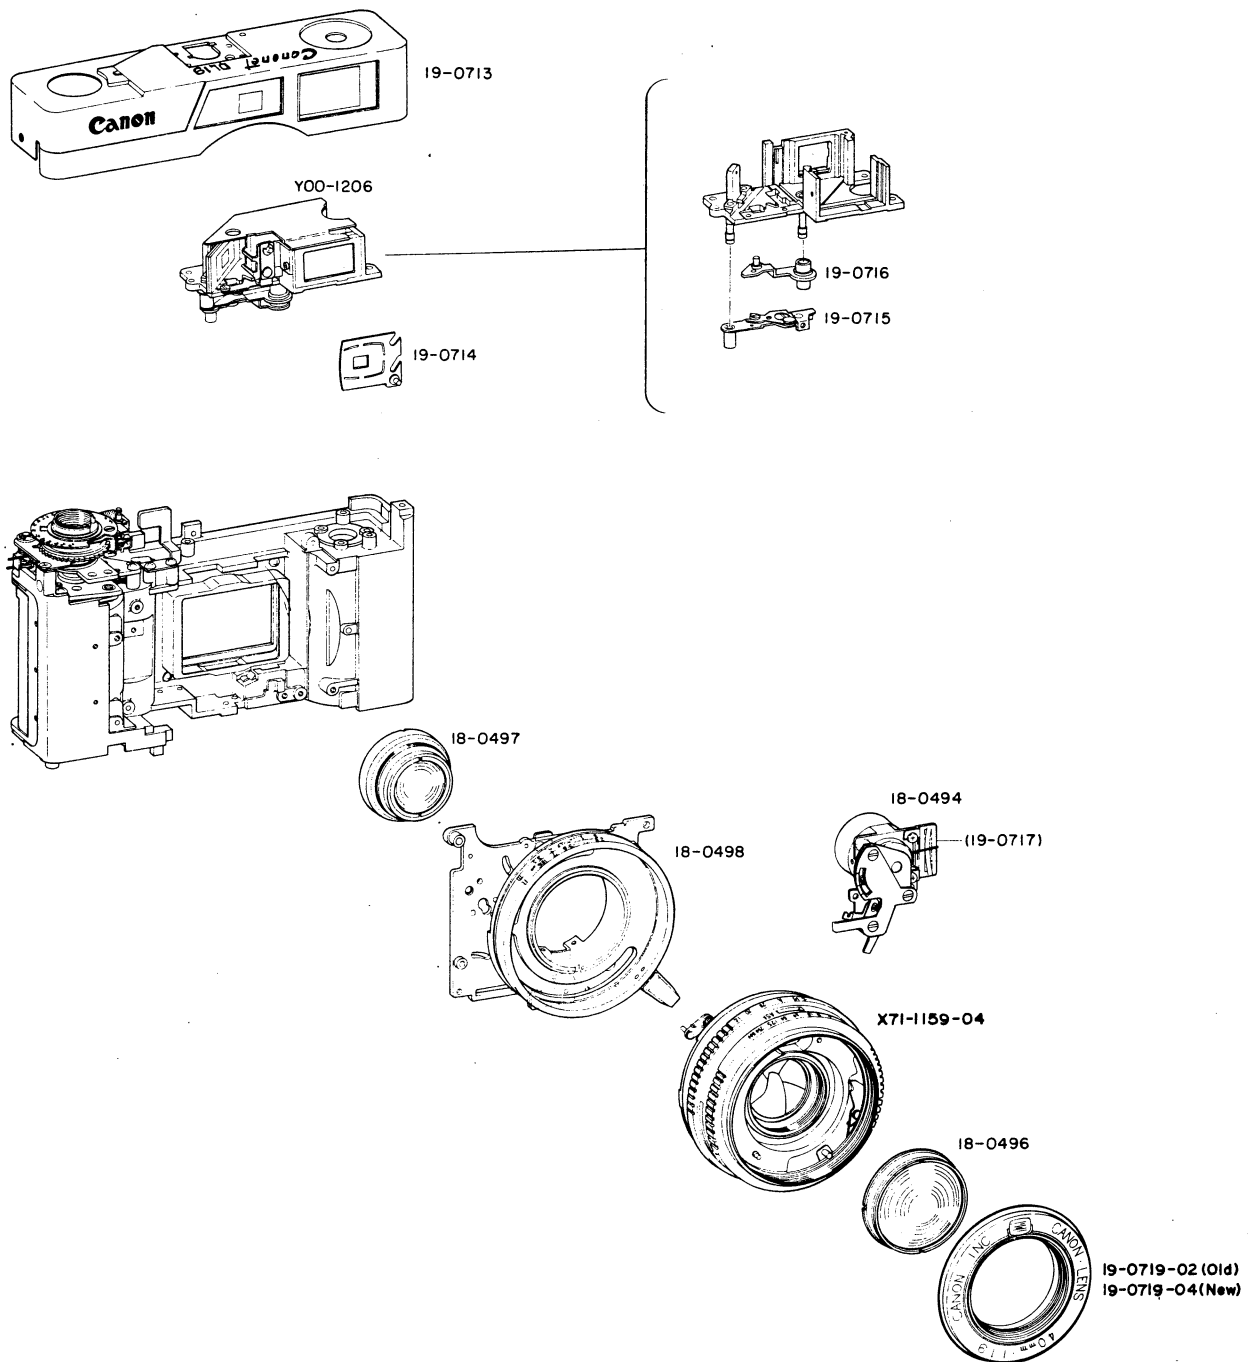

Canon Canonet QL 19 is absolutely the product in mechanism as Canon Canonet QL 17 is, we therefore picked up only parts which are used in the Canon Canonet QL 19 for this repair manual. The rest of the parts as Canon Canonet QL 19, in case if necessary, refer to the repair manual of Canon Canonet QL 17 (1-30801).

PARTS LIST


部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ファインダーユニット	D	Y00-1206	1	View Finder Unit
メーターユニット	C	18-0494	1	Exposure Lens Unit
前 玉 ユ ニ ッ ト	C	18-0496	1	Front Lens Unit
後 玉 ユ ニ ッ ト	C	18-0497	1	Rear Lens Unit
前 板 ユ ニ ッ ト	D	18-0498	1	Front Panel Unit
上 部 カ バ ー	C	19-0713	1	Top Cover
ファインダーマスク	C	19-0714	1	Finder Mask
バ ネ 板	E	19-0715	1	Spring Lever
連 動 レ バ ー	E	19-0716	1	Connecting Lever
絞 り 目 盛 板	D	19-0717	1	Aperture Scale Plate
ネ ー ム 環	C	19-0719	1	Name Ring
シ ャ ッ タ ー	C	X71-1159	1	Shutter

CANON REPAIR MANUAL

SHUTTER for CANON NEW CANONET QL 19
(REF. NO. 1-30811)

CANON INC. JAPAN

EXPLODED VIEW
of
SHUTTER for CANON NEW CANONET QL 19

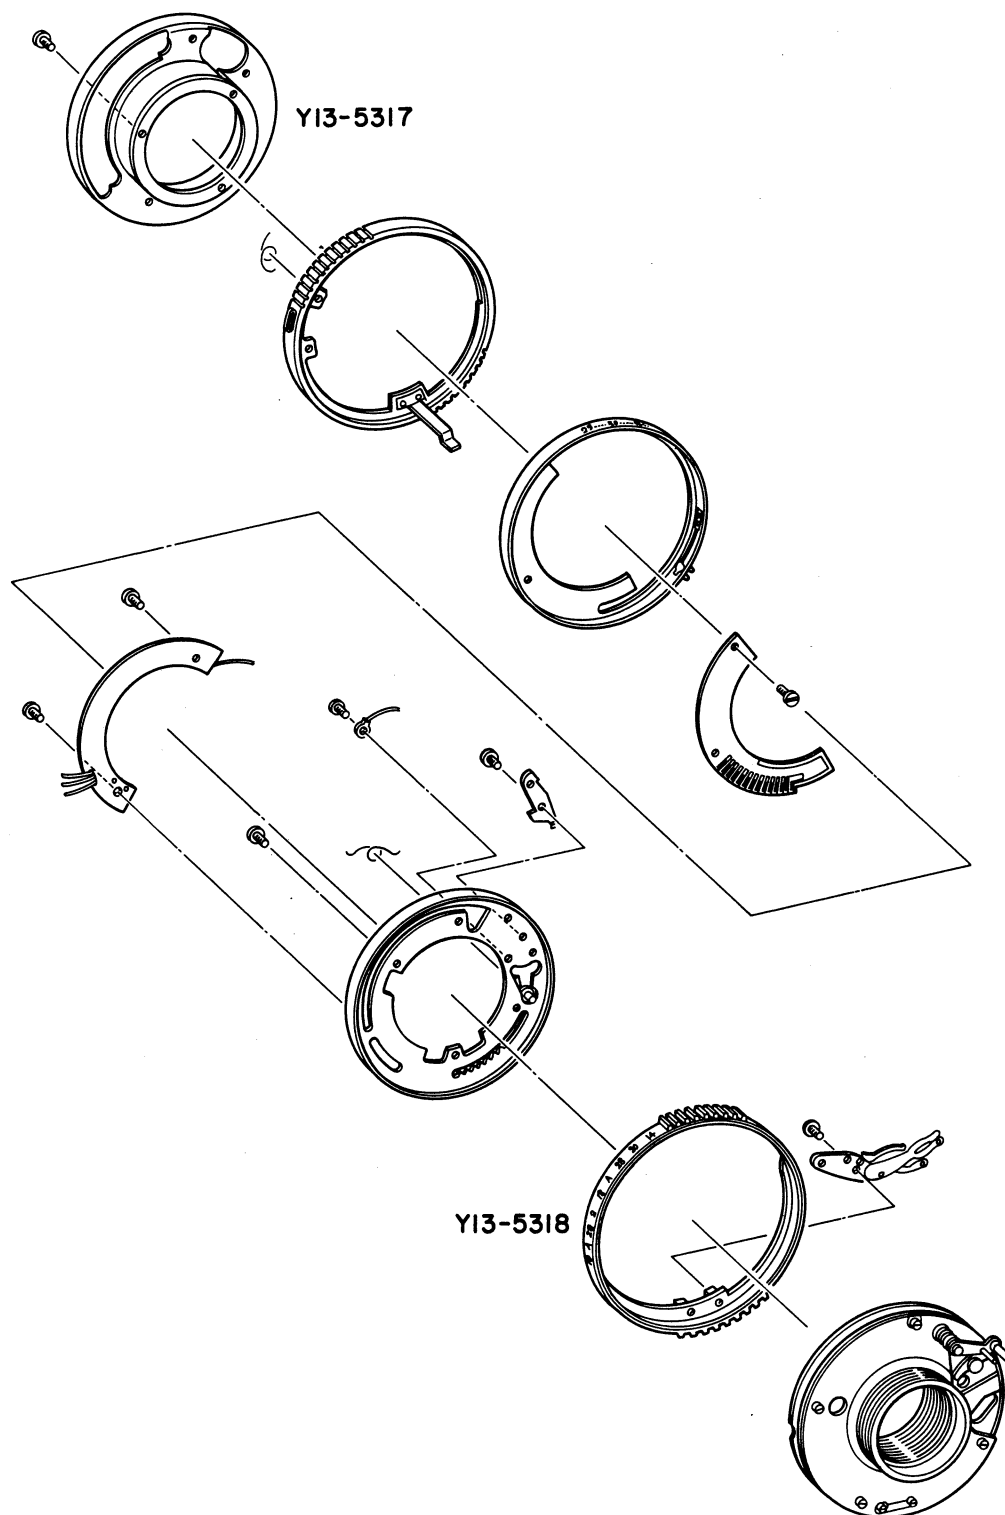

The shutter for the CANON NEW CANONET QL 19 is the same as the shutter for the CANON NEW CANONET QL 17, with the exception of the parts in this list.

For any part not listed, refer to the repair manual for the shutter of CANON NEW CANONET QL 17.

PARTS LIST

Y13-5317	Front Ring
Y13-5318	Shutter Speed Ring

CANON GENERAL

NEW CANONET 28
(REF. NO. 1-30821)

CANON INC. JAPAN

1. General

This camera is a popular priced addition to the New Canonet line, whose Lens, Shutter and other parts have been simplified from the New Canonet QL 17 and 19. The combination of C.A. T. system, Canolite D and program EE enables you to take photographs easily day or night.

This New Canonet 28 recently put on sale, is a very compact camera, handy for youths and women.

2. Technical specifications

2.1 Lens

2.1.1 Focal length and aperture ratio:

40mm 1:2.8 (Canonet 2.8, Canonet EE,
Canomatic m70)

Composed of 4 lenses in 3 groups

Angle of view:

Diagonal: 57° Horizontal: 48°

Perpendicular: 33°

2.1.2 Focus:

Coupled Range Finder helicoid focusing.

Rotation: $\infty \rightarrow 0.8\text{m} : 41^\circ$

2.1.3 Distance scale:

m	∞	5	3	2	1.5	1	0.8
ft	20	10		5		3	

2.2 Shutter:

Copal No. 000 mechanical shutter X contact (1/30)

No Selftimer

Shutter speed: 1/30~1/620 sec (AUTO)

2.3 View finder

2.3.1 Model:

Range Finder-equipped bright frame finder

Magnification: 0.6 X

2.3.2 Finder information:

Exposure warning mark, Shutter speed and bright
frame line Parallax: compensation Mark system

2.4 Exposure system

2.4.1 Model: Program EE system with CdS
When AUTO is disengaged, aperture can be selected from f/2.8 to 16.
Shutter speed is 1/30.

2.4.2 EE coupling range: ASA 400. 1/30 sec. f/2.8~ASA 25. 1/620 sec. f/14.5
(At ASA 100, brightness is EV 8~17.)
With light conditions outside the EE coupling range, the shutter button is locked.

2.4.3 Meter average field angle:
70°

2.4.4 Filter exposure Factor:
Automatic compensation

2.4.5 Power source: One H-D mercury battery:
H-D $\begin{cases} \text{M20} \\ 625 \end{cases}$

2.5 Flash system

2.5.1 Cordless contact (also equipped with aperture control contact)

2.5.2 Auto flash: Using the Canolite D, perfect auto flash of variable aperture system is obtained in AUTO.
When other flashes are attached to the camera, auto flash is not usable, so the Manual Diaphragm Unit is used.
When it is beyond the connecting range of Canolite D, the Meter needle goes into the red warning mark and the Shutter release is locked.

2.6 Body

- 2.6.1 Film loading: Same as the F-1; multislit film spool
 - 2.6.2 Film winding: Single stroke lever
Ratchet winding impossible
Winding angle: 127° Reserve angle: 6°
Continuous feeding mechanism from S to 1.
 - 2.6.3 Built-in film supply and feed indicator
 - 2.6.4 Film counter: Regular counting system, one frame feed,
Automatic return system
 - 2.6.5 Operation of Rear cover:
Hinged, Opened by pulling up the film rewind knob.
 - 2.6.6 Accessory shoe: Cordless contact system
Equipped with Aperture control contact
 - 2.6.7 Tripod screw: CU 1/4
 - 2.6.8 Size and weight: 120 x 75 x 61 mm, 540g
3. Related parts
- 3.1 Lens cap
 - 3.2 Hood (Canonet Hood 4)
 - 3.3 Filter (48mm screw-in filter)
 - 3.4 Speedlite (Canolite D and Speedlite 102)
Adapter necessary for 102
 - 3.5 Flash (J-2, J-3, Quit D, Cube D)
Adapter necessary for J-2, J-3
 - 3.6 Cordless shoe adaptor

3.7 Cable release (Release 30 and 50)

3.8 Leather case

3.9 Neck strap (Neck strap 4)

3.10 Auto-up (tentative)

4. Detailed specifications

4.1 EE mechanism and Auto flash



The New Canonet 28 has a program EE system in which a single Shutter speed and Aperture are combined for each EV. It is an orthodox EE mechanism which permits automatic exposure setting by a 2 step per EV saw tooth which clamps the meter needle. The circuit diagram and shutter program chart are at the end of this section.

The camera, as New Canonet QL 17 and 19, is so constructed that the Shutter cannot be released when the Meter needle is within the red warning mark (low or high brightness). Auto flash is available only by using the Canolite D, and when other flashes are attached, the Manual Diaphragm Unit must be used, disengaging AUTO. Where the Manual Diaphragm Unit is used, the shutter speed is automatically set to 1/30 sec.

Connection with Canolite D is exactly the same as in QL 17 and 19 in principle; however, the camera differs from QLs in the following respects; selection of Shutter speed is decided by varying the Aperture at the front of Cds in EE photography and by changing the distance resistor in auto flash. Also the Meter needle in the Finder swings in the opposite direction to the QL 17 and 19's and the needle moves from lower to higher position as Canolite D is charged.


When it is beyond the coupling range of Canolite D, the meter needle goes into the lower red warning mark and the Shutter cannot be released. The needle works within about the lower half of the scale, moreover, when auto flash is in operation, the needle does not indicate the actual shutter speed in use.

Circuit diagram of EE-Autoflash

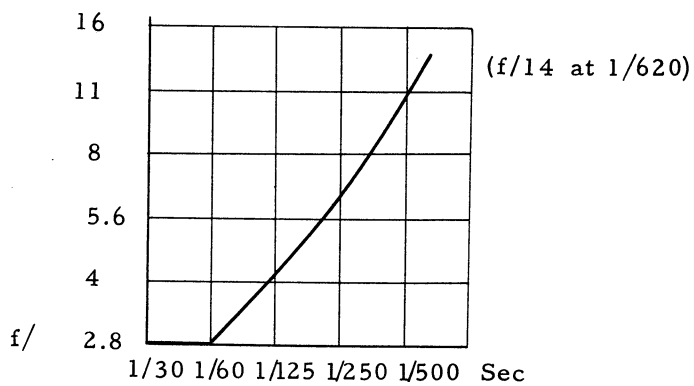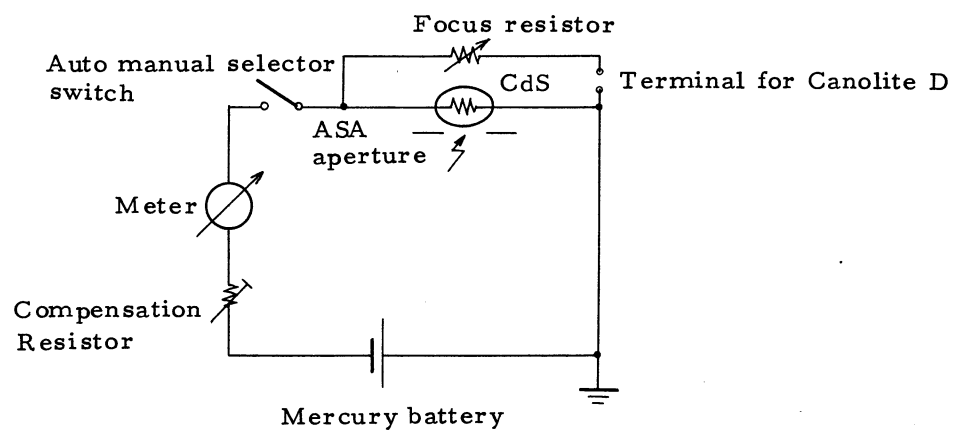

Shutter Program Graph

View Finder New Canonet 28

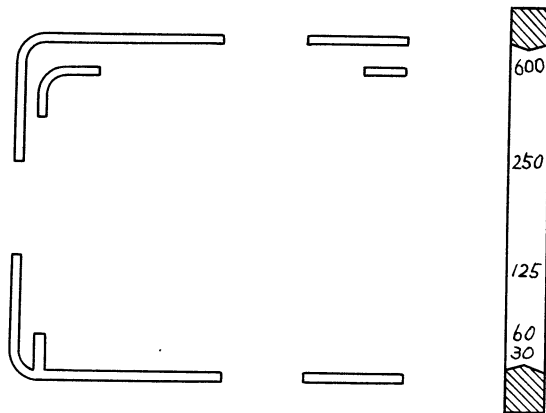

CANON REPAIR MANUAL

CANON NEW CANONET 28
(REF. NO. 1-30821)


CANON INC. JAPAN

CONTENTS

	Page
TOP COVER	1
上 部 カ バ ー	
BASE COVER	1
下 部 カ バ ー	
BACK COVER	1
裏 ぶ た	
FRONT PANEL PART	2
前 板 部	
LENS PART	3
レ ン ズ 部	
SHUTTER	3
シャッター	
WINDING BASE	4
巻 上 げ 地 板	
VIEW FINDER	4, 5
距 離 計	
FILM COUNTER	6
フイルムカウンター	
TAKE UP SPOOL	6
巻 取 リ ス プ ール	
WINDING SHAFT	6
巻 上 げ 軸	
CIRCUIT DIAGRAM	7
配 線 図	
INDEX OF PARTS NUMBERS	
索 引	

EXPLODED VIEW
of
CANON NEW CANONET 28

18-0547 - BACK COVER ASSY,
ALSO INCLUDES
13-9215
13-9216

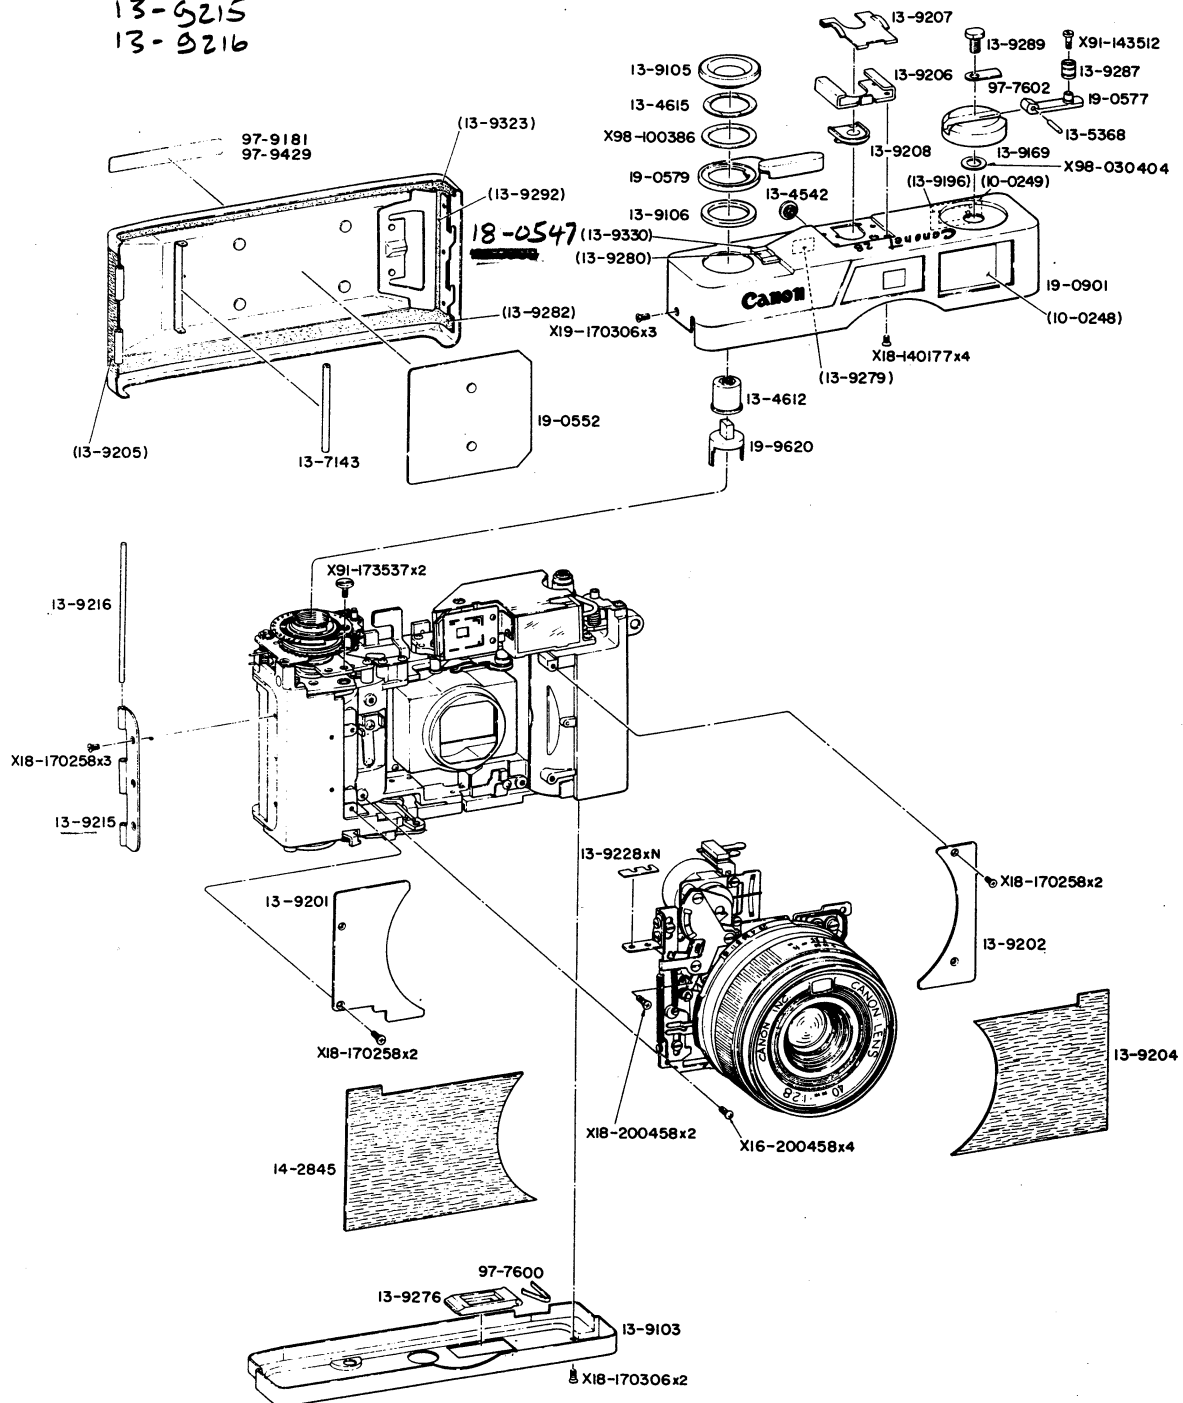

PARTS LIST

TOP COVER, BASE COVER & BACK COVER


上部カバー

下部カバー

裏ぶた

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
前 面 ガ ラ ス	C	10-0248	1	Front Glass
接 眼 レ ン ズ	C	10-0249	1	Eye piece Lens
キ ャ ッ プ	D	13-4542	1	Cap
シ ャ ッ タ ー ボ タ ン	C	13-4612	1	Shutter Button
波 ワ ッ シ ャ ー	B	13-4615	1	Washer
ピ ン	C	13-5368	1	Pin
ロ ー ラ ー	C	13-7143	1	Roller
下 部 カ バ ー	C	13-9103	1	Base Cover
シ ャ ッ タ ー ボ タ ン リ ン グ	B	13-9105	1	Shutter Button Guard
ワ ッ シ ャ ー	C	13-9106	1	Washer
巻 戻 し ノ ブ	C	13-9169	1	Rewind Knob
接 眼 レ ン ズ 枠	C	13-9196	1	Eyepiece Lens Frame
前 カ バ ー	D	13-9201	1	Front Cover
前 カ バ ー	D	13-9202	1	Front Cover
レ ザ ー	A	13-9204	1	Leather
レ ザ ー	A	13-9205	1	Leather
ア ク セ サ リ ー シ ュ ー	D	13-9206	1	Accessory Shoe
ア ク セ サ リ ー シ ュ ー カ バ ー	B	13-9207	1	Accessory Shoe Cover
シ ン ク ロ タ ー ミ ナ ル	D	13-9208	1	Connect Flash Terminal
蝶 番	C	13-9215	1	Hinge
蝶 番 軸	C	13-9216	1	Shaft of Hinge
調 整 ワ ッ シ ャ ー	C	13-9228	N	Adjusting Washer
電 池 室 蓋	B	13-9276	1	Battery Box Cover
フ ィ ル ム 送 り 指 標 窓	C	13-9279	1	Film Feed Index Window
カ ウ ン タ ー 窓	C	13-9280	1	Counter Window
庶 光 別 珍	B	13-9282	1	Light Shield
ク ラ ン ク 座	C	13-9287	1	Rewind Crank Head
ビ ス	B	13-9289	1	Screw
庶 光 別 珍	B	13-9292	1	Light Shield
庶 光 別 珍	B	13-9323	1	Light Shield
カ ウ ン タ 窓 枠	C	13-9330	1	Counter Window Frame
レ ザ ー	A	14-2845	1	Leather
圧 着 板	B	19-0552	1	Pressure Plate
巻 戻 し ク ラ ン ク	C	19-0577	1	Rewind Crank
巻 上 げ レ バ ー	B	19-0579	1	Winding Lever
上 部 カ バ ー	D	19-0901	1	Top Cover
裏 ぶ た	D	19-0902 18-0547	1	Back Cover
シ ャ ッ タ ー ボ タ ン 座	C	19-9620	1	Shutter Button Base
板 ス プ リ ン グ	B	97-7600	1	Plate Spring
板 ス プ リ ン グ	D	97-7602	1	Plate Spring
No. プ レ ー ト (日 本)	E	97-9181	1	No. Plate (Japan)
No. プ レ ー ト (台 湾)	E	97-9429	1	No. Plate (Taiwan)
十 字 ナ ベ ビ ス		X16-200458	4	Screw
十 字 皿 ビ ス		X18-140177	4	Screw
十 字 皿 ビ ス		X18-170258	7	Screw
十 字 皿 ビ ス		X18-170306	2	Screw
十 字 皿 ビ ス		X18-200458	2	Screw
十 字 丸 脚 ビ ス		X19-170306	3	Screw
平 ビ ス		X91-143512	1	Screw
平 ビ ス		X91-173537	2	Screw
ワ ッ シ ャ ー		X98-030404	1	Washer
ワ ッ シ ャ ー		X98-100386	1	Washer

EXPLODED VIEW
of
CANON NEW CANONET 28

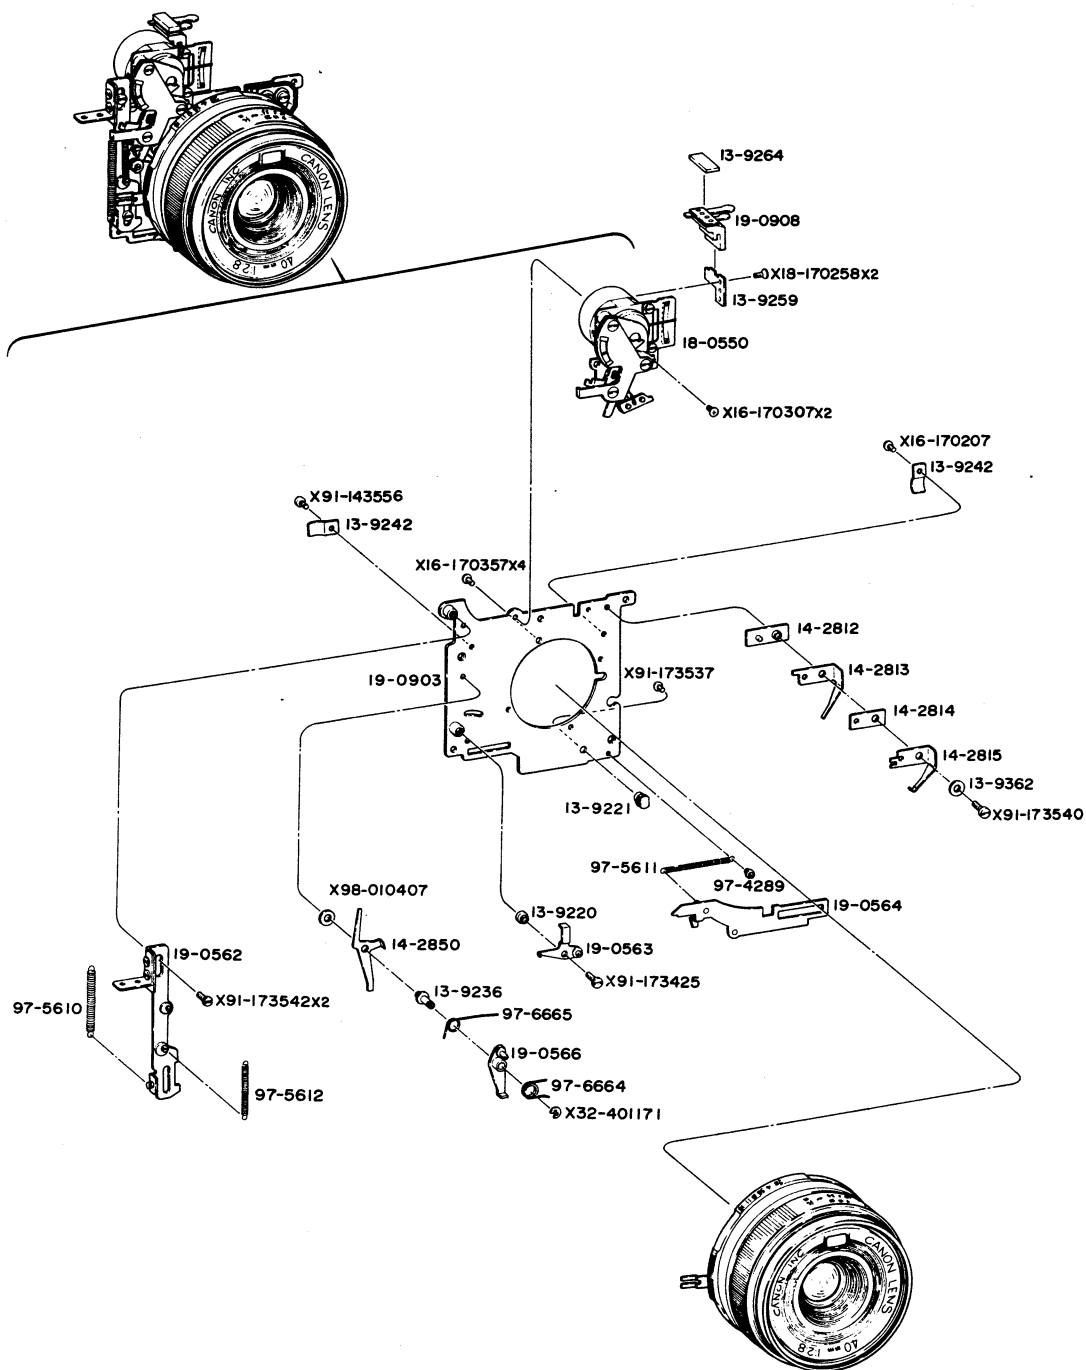


PARTS LIST

FRONT PANEL PARTS

前板部

部 品 名 称			CLASS	PARTS NO.	QTY.	DESCRIPTION
カ	ラ	ー	C	13-9220	1	Collar
ナ	ッ	ト	C	13-9221	1	Nut
ロ	ッ	ク	D	13-9236	1	Shaft
コ	ー	ド	C	13-9242	2	Cord Holder
接	片	指	C	13-9259	1	Contact Supporter
モ	ル	ト	C	13-9264	1	Contact Holder
絶	縁	ワ	C	13-9362	1	Washer
絶	縁	板	C	14-2812	1	Insulator
接		片	C	14-2813	1	Contact
絶	縁	板	C	14-2814	1	Insulator
接		片	C	14-2815	1	Contact
ロ	ッ	ク	C	14-2850	1	Lock Lever
メ	ー	タ	B	18-0550	1	Exposure Meter Unit
シ	ャ	ッ	C	19-0562	1	Shutter Release Lever
巻	止	め	C	19-0563	1	Stopper Remove Lever
シ	ャ	ッ	D	19-0564	1	Shutter Charge Lever
シ	ャ	ッ	D	19-0566	1	Shutter Lock Lever
前		板	D	19-0903	1	Front Panel
接		片	C	19-0908	1	Contact
ビ		ス	C	97-4289	1	Screw
コ	イ	ル	C	97-5610	1	Coil Spring
コ	イ	ル	C	97-5611	1	Coil Spring
コ	イ	ル	C	97-5612	1	Coil Spring
ス	ブ	リ	C	97-6664	1	Spring
ス	ブ	リ	C	97-6665	1	Spring
十	字	ナ		X16-170207	1	Screw
十	字	ナ		X16-170307	2	Screw
十	字	ナ		X16-170357	4	Screw
十	字	皿		X18-170258	2	Screw
緊	定	ワ		X32-401171	1	Retaining Washer
平	ビ	ス		X91-143556	1	Screw
平	ビ	ス		X91-173425	1	Screw
平	ビ	ス		X91-173537	1	Screw
平	ビ	ス		X91-173540	1	Screw
平	ビ	ス		X91-173542	2	Screw
ワ	ッ	シ		X98-010407	1	Washer

EXPLODED VIEW
of
CANON NEW CANONET 28

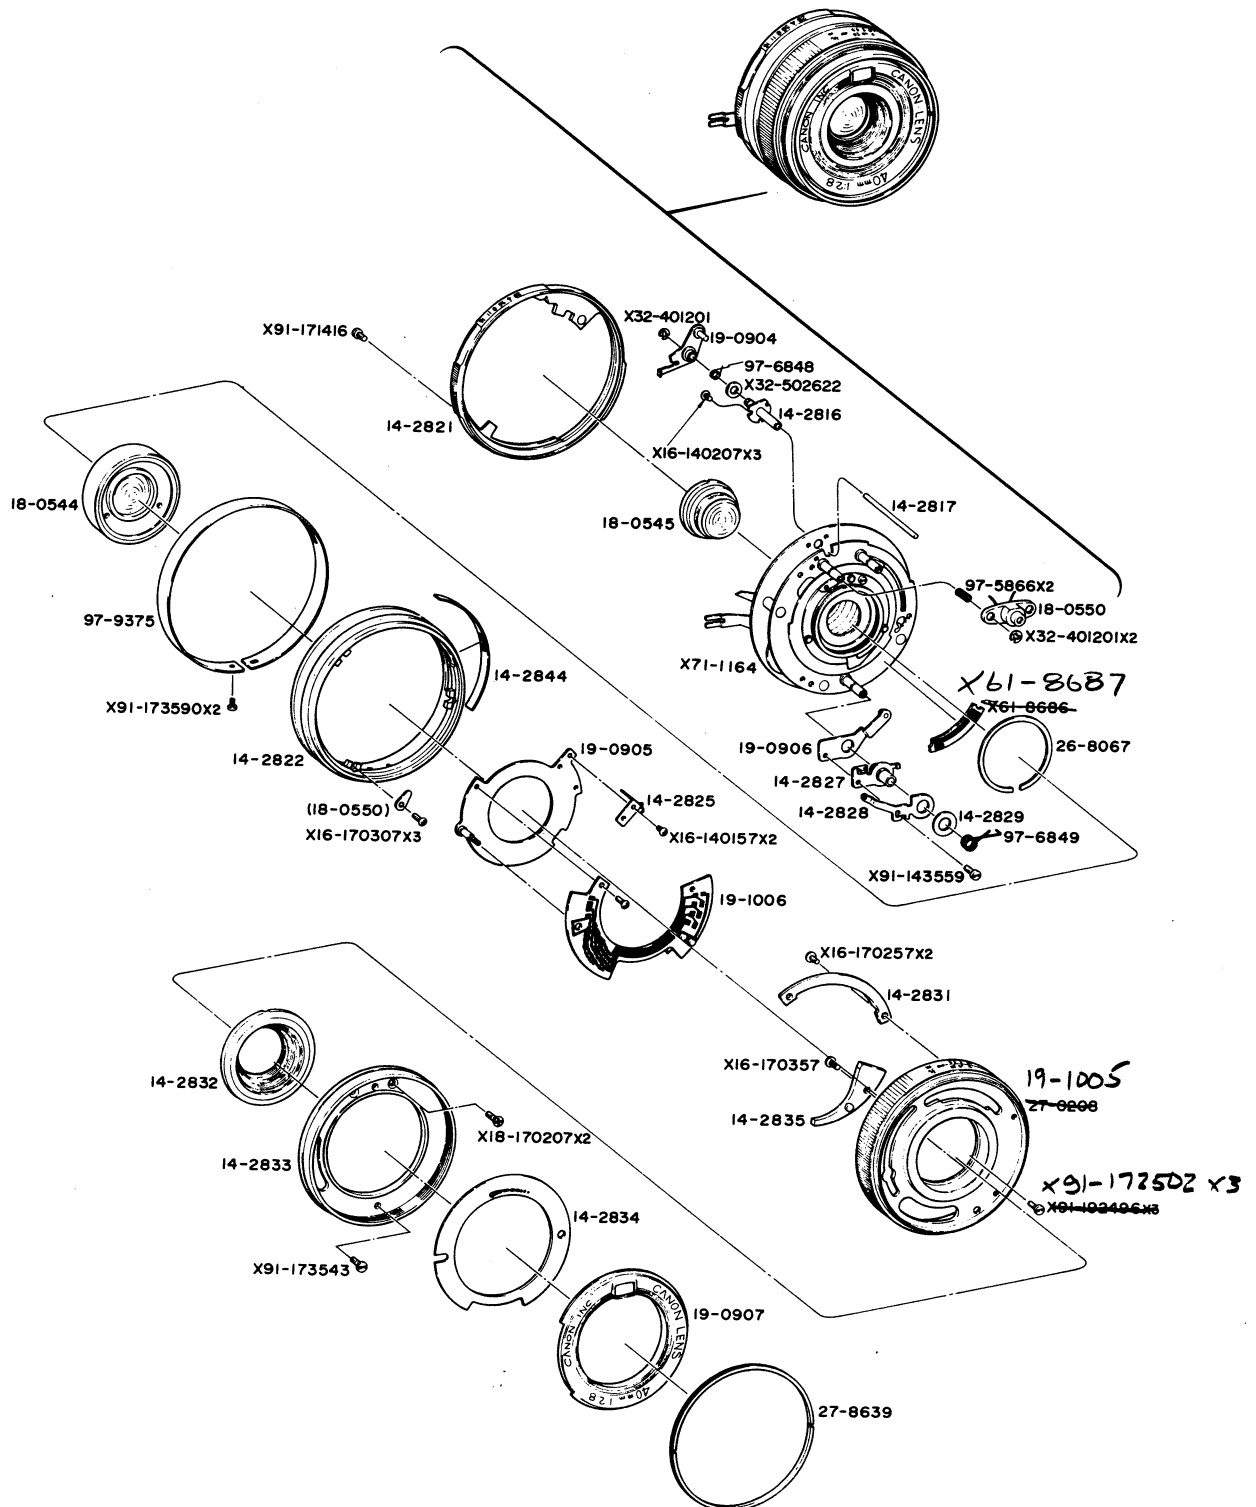

PARTS LIST


LENS PARTS & SHUTTER

レンズ部

シャッター

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ピンメタル	B	14-2816	1	Pin Metal
ピン	C	14-2817	1	Pin
絞リ環	C	14-2821	1	Aperture Ring
飾リ環	C	14-2822	1	Cover Ring
ASA 切換レバー	D	14-2825	1	ASA Change Lever
接片絶縁軸	C	14-2827	1	Insulator Shaft
接片	C	14-2828	1	Contact
絶縁ワッシャー	C	14-2829	1	Washer
力ム	D	14-2831	1	Cam
飾リ環	C	14-2832	1	Ring
鏡頭	C	14-2833	1	Front Ring
絞リ板	C	14-2834	1	Diaphragm Plate
抵抗切換レバー	C	14-2835	1	Resistor Change Lever
ASA カバー	C	14-2844	1	ASA Cover
前玉ユニット	C	18-0544	1	Front Lens Unit
後玉ユニット	C	18-0545	1	Rear Lens Unit
メーターユニット	B	18-0550	1	Exposure Meter Unit
固定レバー	C	19-0904	1	Lever
ASA プレート	D	19-0905	1	ASA Plate
連動レバー	C	19-0906	1	Lever
ネーム環	C	19-0907	1	Name Ring
プリント板ユニット	C	19-1006	1	Resistor Plate Unit
割ワッシャー	B	26-8067	1	Snap Washer
距離環	C	27-0208	1	Focusing Ring
押え環	C	27-8639	1	Assembly Collar
コイルスプリング	C	97-5866	2	Coil Spring
スプリング	C	97-6848	1	Spring
スプリング	C	97-6849	1	Spring
ASA リング	D	97-9375	1	ASA Ring
十字ナベビス		X16-140157	2	Screw
十字ナベビス		X16-140207	3	Screw
十字ナベビス		X16-170257	2	Screw
十字ナベビス		X16-170307	3	Screw
十字ナベビス		X16-170357	1	Screw
十字ナベビス		X18-170207	2	Screw
緊定ワッシャー		X32-401201	3	Retaining Washer
ワッシャー		X32-502622	1	Washer
プリント板		X61-8686	1	Printed Circuit Board
シャッター	D	X71-1164	1	Shutter
平ビス		X91-143559	1	Screw
平ビス		X91-171416	1	Screw
平ビス		X91-173543	1	Screw
平ビス		X91-173590	2	Screw
平ビス		X91-192496	3	Screw

EXPLODED VIEW
of
CANON NEW CANONET 28

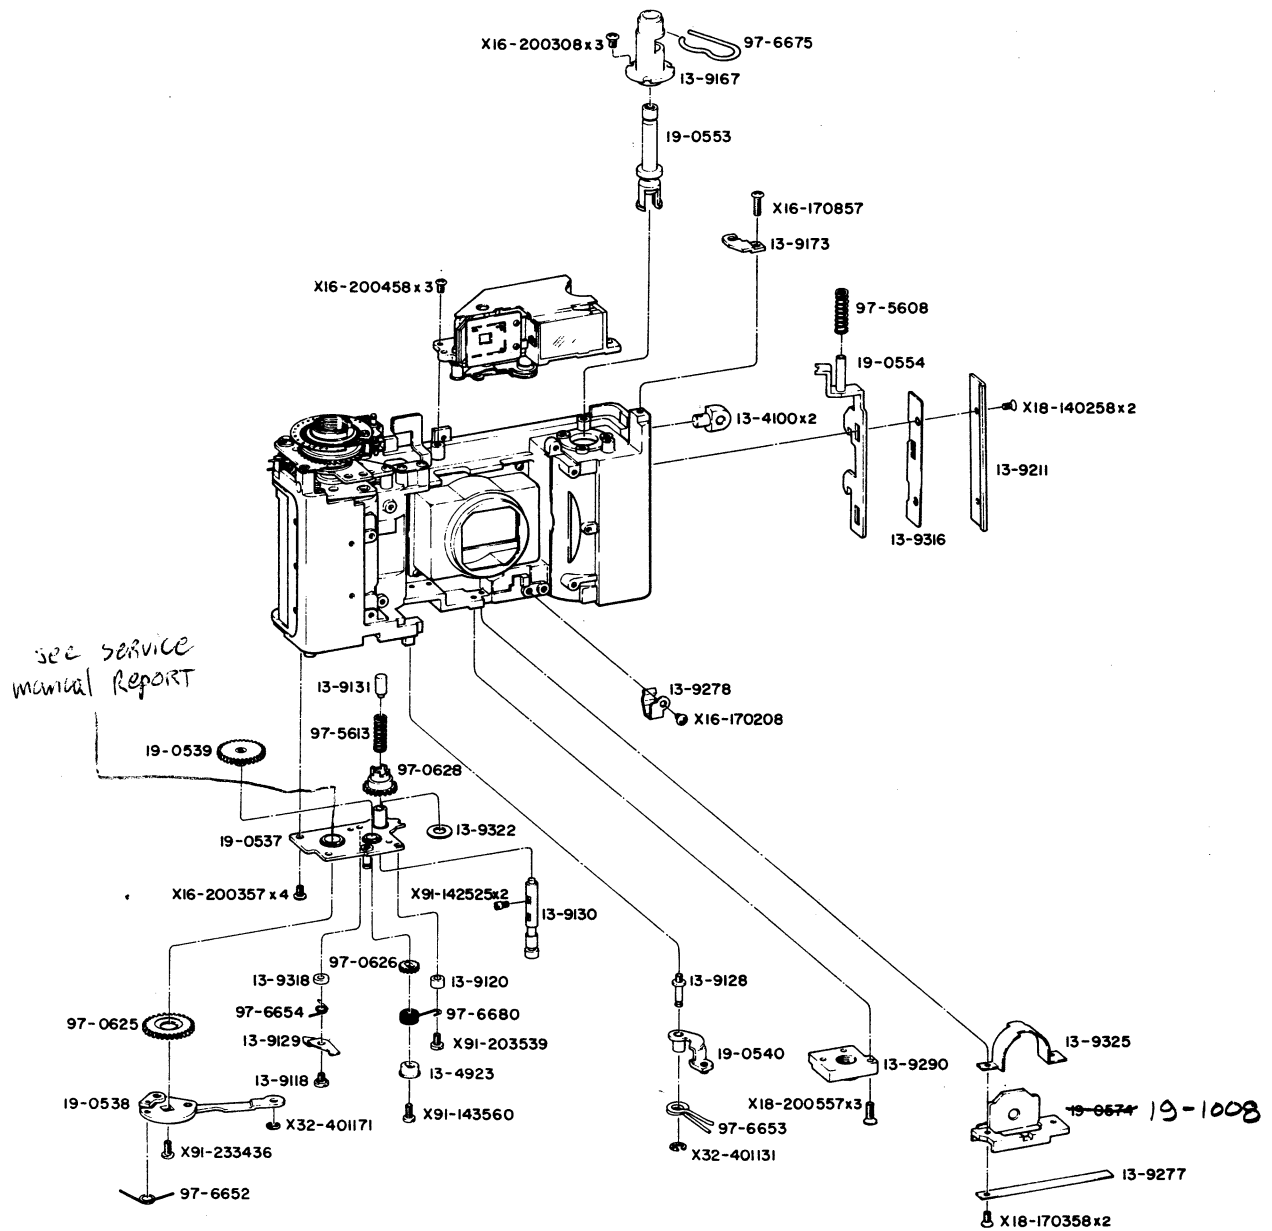

PARTS LIST


WINDING BASE & VIEW FINDER

巻上げ地板

距離計

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
吊 環	C	13-4100	2	Neck Strap Catch
ス プ リ ン グ 受 け	C	13-4923	1	Spring Holder
ス タ ッ ド	C	13-9118	1	Stud
カ ラ ー	C	13-9120	1	Collar
チャージバネ軸	D	13-9128	1	Charge Spring Shaft
ラチェットレバー	C	13-9129	1	Ratchet Lever
巻戻しボタン	D	13-9130	1	Rewind Button
バネ受け	C	13-9131	1	Spring Catch
巻戻しメタル	C	13-9167	1	Rewind Metal
軸受け	C	13-9173	1	Shaft Holder
ロックレバーカバー	C	13-9211	1	Lock Lever Cover
水銀電池はずし	C	13-9277	1	Battery Tack Out Plate
電池接片	C	13-9278	1	Buttery Contact
三脚取り付けネジ	D	13-9290	1	Tripod Socket
スベーサー	D	13-9316	1	Spacer
ワッシャー	C	13-9318	1	Washer
ワッシャー	C	13-9322	1	Washer
バッテリーカバー	D	13-9325	1	Battery Cover
巻上げ下地板	C	19-0537	1	Winding Base
巻上げ爪	C	19-0538	1	Winding Pawl
中間ギヤー	C	19-0539	1	Inner Gear
チャージレバー	D	19-0540	1	Shutter Charge Lever
巻戻しフオーク	B	19-0553	1	Rewind Fork
ロックレバー	D	19-0554	1	Lock Lever
水銀電池室	D	19-0574	1	Battery Box
巻上げギヤー	D	97-0625	1	Winding Gear
アイドルギヤー	D	97-0626	1	Idle Gear
スプロケットギヤー	D	97-0628	1	Sprocket Gear
コイルスプリング	C	97-5608	1	Coil Spring
コイルスプリング	C	97-5613	1	Coil Spring
スプリング	C	97-6652	1	Spring
スプリング	C	97-6653	1	Spring
スプリング	D	97-6654	1	Spring
スプリング	C	97-6675	1	Spring
スプリング	C	97-6680	1	Spring
十字ナベビス		X16-170208	1	Screw
十字ナベビス		X16-170857	1	Screw
十字ナベビス		X16-200308	3	Screw
十字ナベビス		X16-200357	4	Screw
十字ナベビス		X16-200458	3	Screw
十字皿ビス		X18-140258	2	Screw
十字皿ビス		X18-170358	2	Screw
十字皿ビス		X18-200557	3	Screw
緊定ワッシャー		X32-401131	1	Retaining Washer
緊定ワッシャー		X32-401171	1	Retaining Washer
平ビス	ス	X91-142525	2	Screw
平ビス	ス	X91-143560	1	Screw
平ビス	ス	X91-203539	1	Screw
平ビス	ス	X91-233436	1	Screw

EXPLODED VIEW
of
CANON NEW CANONET 28

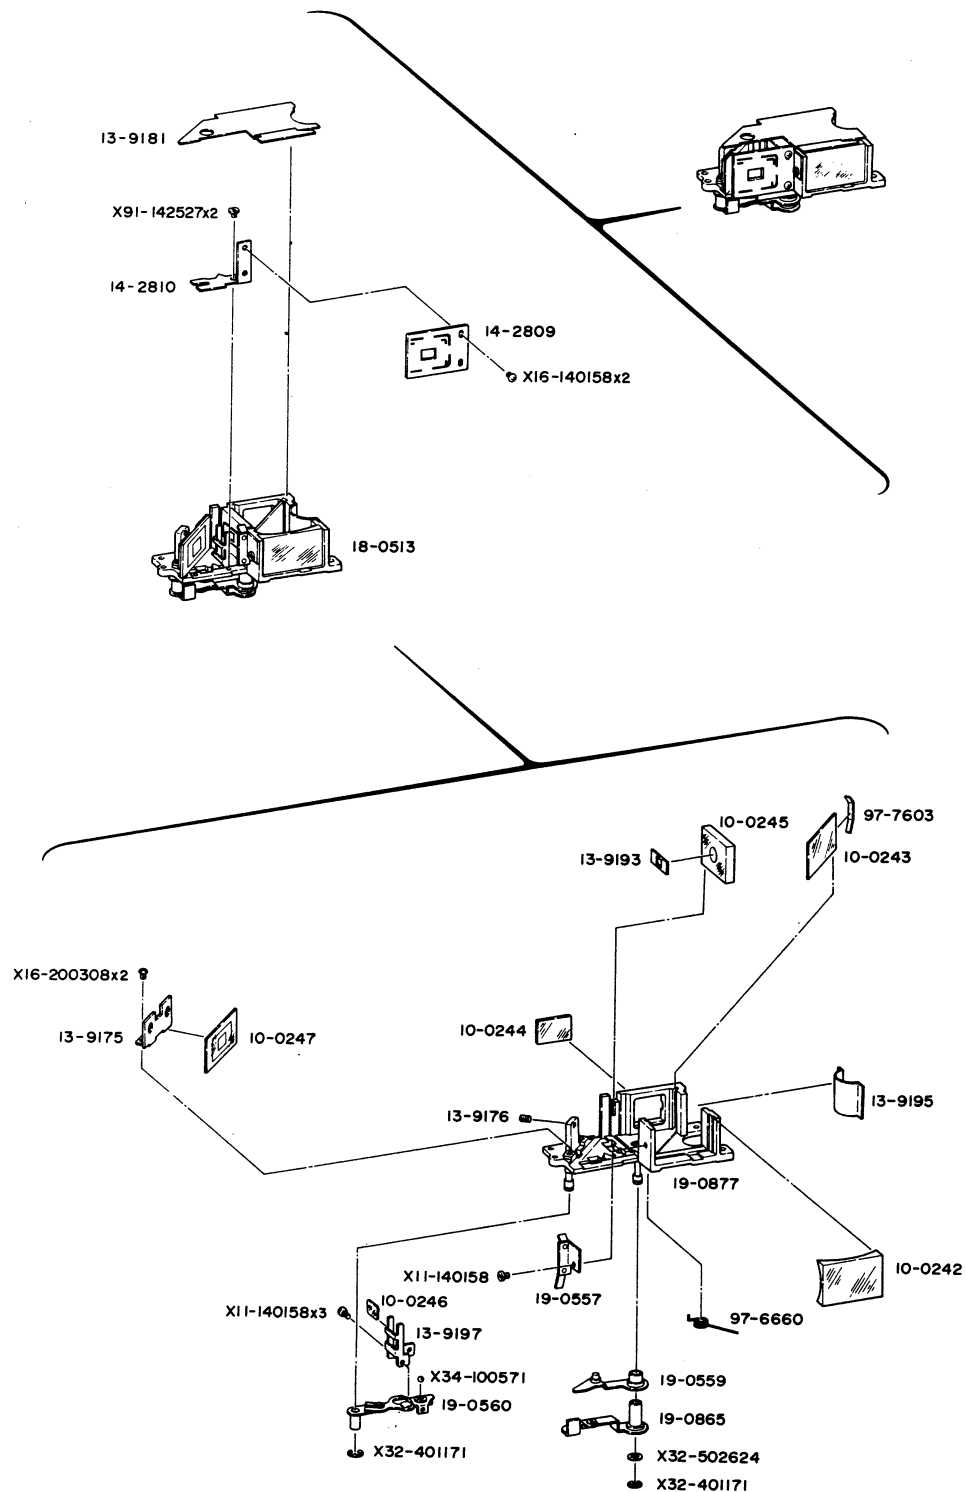


PARTS LIST

VIEW FINDER


距離計

部 品 名 称			CLASS	PARTS NO.	QTY.	DESCRIPTION
レ	ン	ズ	D	10-0242	1	Lens Element
レ	ン	ズ	D	10-0243	1	Lens Element
レ	ン	ズ	D	10-0244	1	Lens Element
レ	ン	ズ	D	10-0245	1	Lens Element
レ	ン	ズ	D	10-0246	1	Lens Element
ミ	ラ	ー	D	10-0247	1	Mirror
ミ	ラ	ー 地 板	E	13-9175	1	Mirror Base
ビ		ス	C	13-9176	1	Screw
フ	ァ	イ	E	13-9181	1	Finder Cover
マ	ス	ク	E	13-9193	1	Mask
フ	ァ	イ	E	13-9195	1	Finder Side Cover
移	動	レ	E	13-9197	1	Movement Lens Base
遮	光	板	C	14-2771	1	Light Shield
フ	ァ	イ	C	14-2809	1	Finder Mask
マ	ス	ク	D	14-2810	1	Finder Mask Holder
距	離	計	E	18-0513	1	View Finder Unit
レ	ン	ズ	D	19-0557	1	Lens Pressure
連	動	レ	E	19-0559	1	Connecting Lever
バ	ネ	板	E	19-0560	1	Spring Lever
距	離	計	C	19-0865	1	Connector Lever
フ	ァ	イ	D	19-0877	1	Finder Box
ス	ブ	リ	D	97-6660	1	Spring
板	ス	ブ	D	97-7603	1	Plate Spring
平	ビ	ス		X11-140158	4	Screw
十	字	ナ		X16-140158	2	Screw
十	字	ナ		X16-200308	2	Screw
緊	定	ワ		X32-401171	2	Retaining Washer
調	整	ワ		X32-502620	N	Adjusting Washer
				X32-502621		
				X32-502622		
				X32-502623		
				X32-502624		
ス	チ	ー	B	X34-100571	1	Steel Ball
平	ビ	ス		X91-142527	2	Screw

EXPLODED VIEW
of
CANON NEW CANONET 28

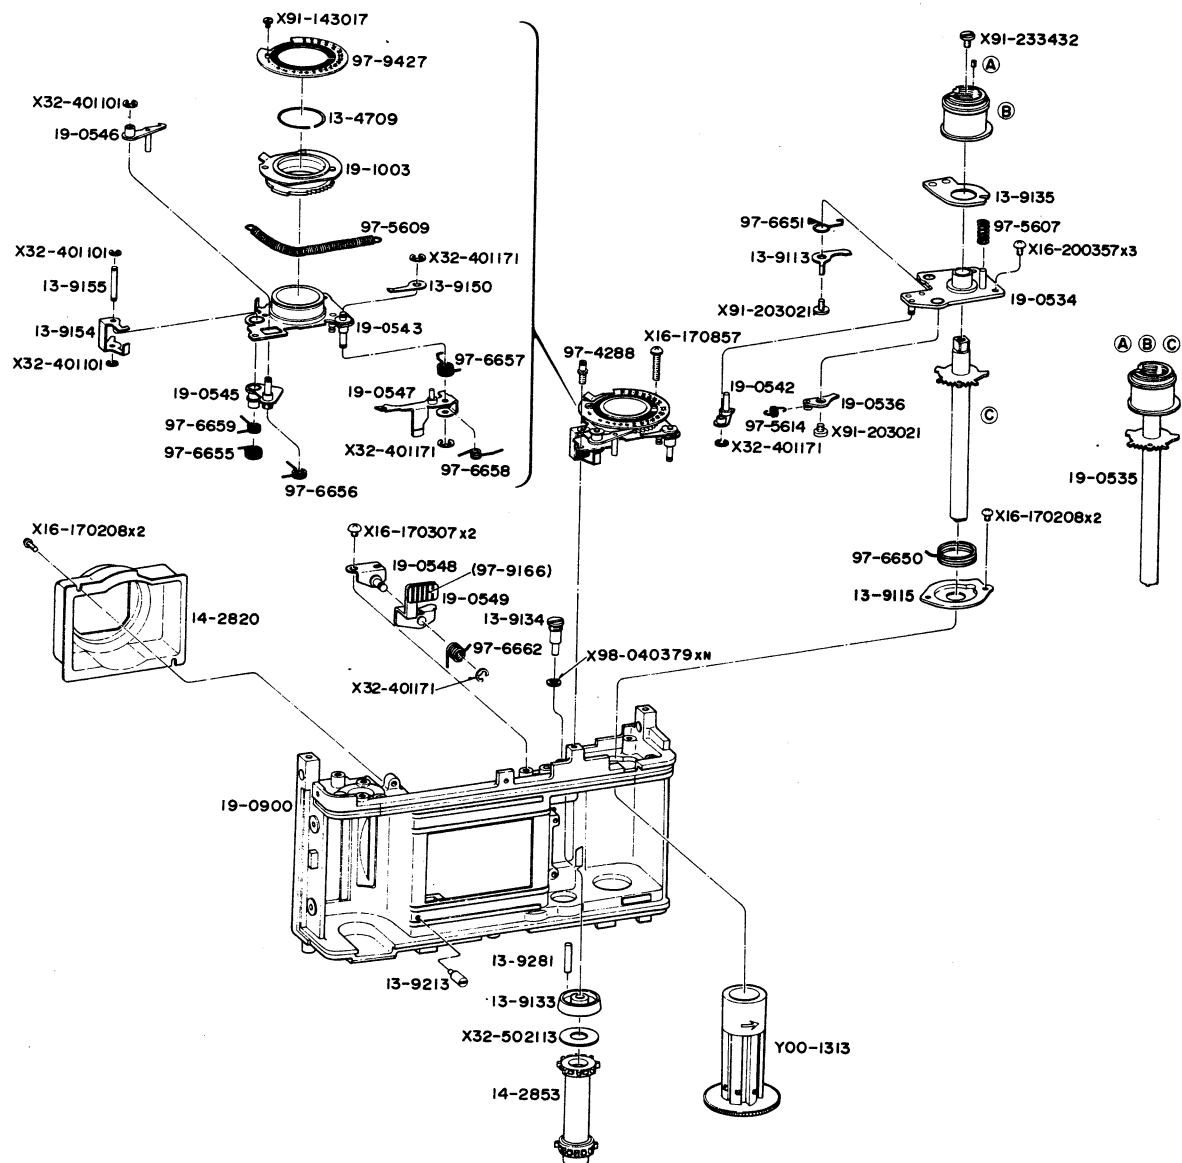

CIRCUIT DIAGRAM
of
CANON NEW CANONET 28

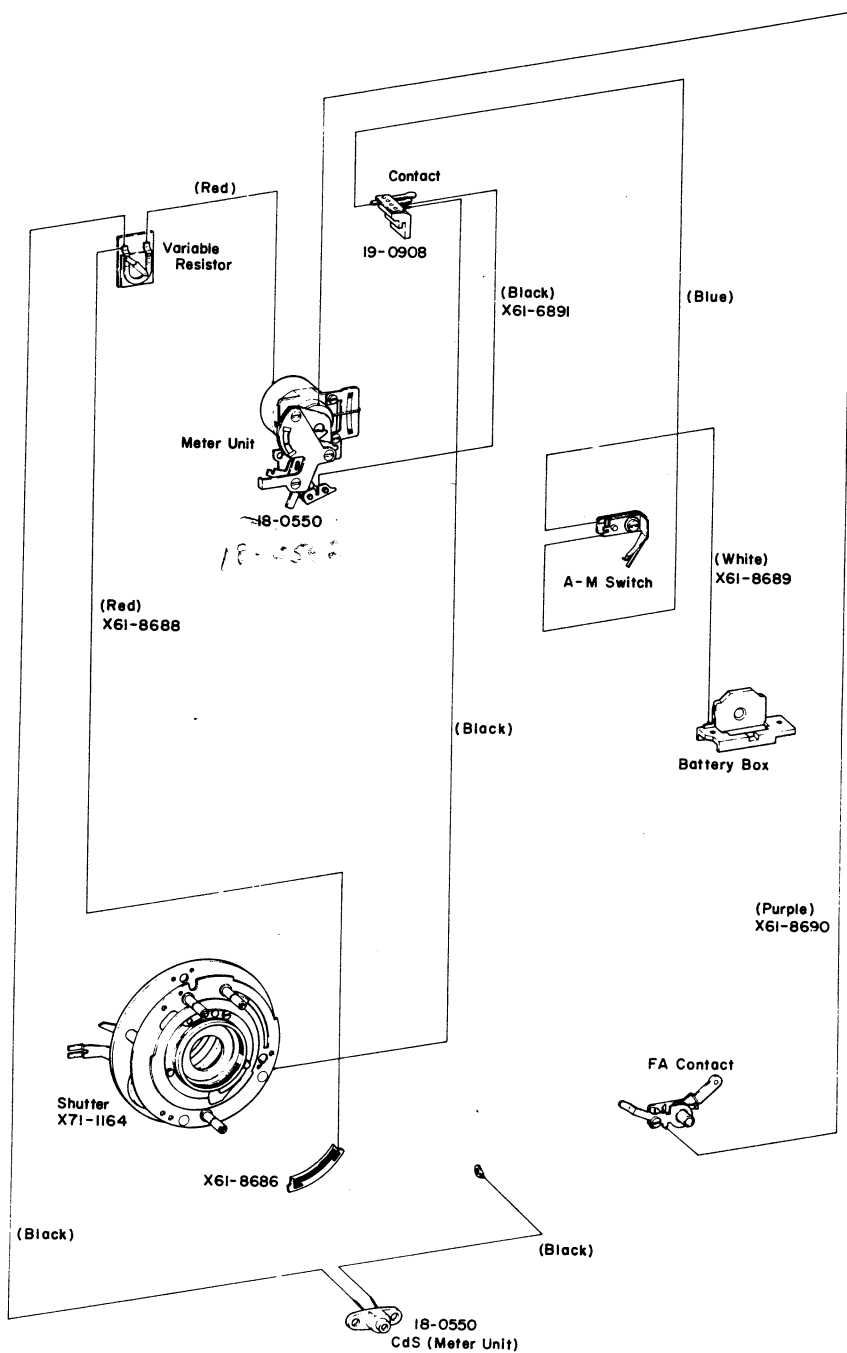

INDEX OF PARTS NUMBERS

PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE
Y00-1313	6	13-9208	1	14-2845	1	27-0208	3
		13-9211	4	14-2850	2	27-8639	3
10-0242	5	13-9213	6	14-2853	6		
10-0243	5	13-9215	1			97-0625	4
10-0244	5	13-9216	1	18-0513	5	97-0626	4
10-0245	5	13-9220	2	18-0544	3	97-0628	4
10-0246	5	13-9221	2	18-0545	3	97-4288	6
10-0247	5	13-9228	1	18-0550	2, 3, 7	97-4289	2
10-0248	1	13-9236	2			97-5607	6
10-0249	1	13-9242	2	19-0534	6	97-5608	4
		13-9259	2	19-0535	6	97-5609	6
13-4100	4	13-9264	2	19-0536	6	97-5610	2
13-4542	1	13-9276	1	19-0537	4	97-5611	2
13-4612	1	13-9277	4	19-0538	4	97-5612	2
13-4615	1	13-9278	4	19-0539	4	97-5613	4
13-4709	6	13-9279	1	19-0540	4	97-5614	6
13-4923	4	13-9280	1	19-0542	6	97-5866	3
13-5368	1	13-9281	6	19-0543	6	97-6650	6
13-7143	1	13-9282	1	19-0545	6	97-6651	6
13-9103	1	13-9287	1	19-0546	6	97-6652	4
13-9105	1	13-9289	1	19-0547	6	97-6653	4
13-9106	1	13-9290	4	19-0548	6	97-6654	4
13-9113	6	13-9292	1	19-0549	6	97-6655	6
13-9115	6	13-9316	4	19-0552	1	97-6656	6
13-9118	4	13-9318	4	19-0553	4	97-6657	6
13-9120	4	13-9322	4	19-0554	4	97-6658	6
13-9128	4	13-9323	1	19-0557	5	97-6659	6
13-9129	4	13-9325	4	19-0559	5	97-6660	5
13-9130	4	13-9330	1	19-0560	5	97-6662	6
13-9131	4	13-9362	2	19-0562	2	97-6664	2
13-9133	6			19-0563	2	97-6665	2
13-9134	6	14-2809	5	19-0564	2	97-6675	4
13-9135	6	14-2810	5	19-0566	2	97-6680	4
13-9150	6	14-2812	2	19-0574	4	97-6848	3
13-9154	6	14-2813	2	19-0577	1	97-6849	3
13-9155	6	14-2814	2	19-0579	1	97-7600	1
13-9167	4	14-2815	2	19-0865	5	97-7602	1
13-9169	1	14-2816	3	19-0877	5	97-7603	5
13-9173	4	14-2817	3	19-0900	6	97-9166	6
13-9175	5	14-2020	6	19-0901	1	97-9181	1
13-9176	5	14-2821	3	19-0902	1	97-9375	3
13-9181	5	14-2822	3	19-0903	2	97-9427	6
13-9193	5	14-2825	3	19-0904	3	97-9429	1
13-9195	5	14-2827	3	19-0905	3		
13-9196	1	14-2828	3	19-0906	3	X11-140158	5
13-9197	5	14-2829	3	19-0907	3		
13-9201	1	14-2831	3	19-0908	2, 7	X16-140157	3
13-9202	1	14-2832	3	19-1003	6	X16-140158	5
13-9204	1	14-2833	3	19-1006	3	X16-140207	3
13-9205	1	14-2834	3	19-9620	1	X16-170207	2
13-9206	1	14-2835	3			X16-170208	4, 6
13-9207	1	14-2844	3	26-8067	3	X16-170257	3

PARTS NO.	PAGE	PARTS NO.	PAGE
X16-170306	3	X91-173590	3
X16-170306	3	X91-192496	3
X16-170307	2, 6, 6	X91-203021	6
X16-170357	2, 3	X91-203539	4
X16-170857	4, 6	X91-233432	6
X16-200308	4, 5	X91-233436	4
X16-200357	4, 6		
X16-200458	1, 4	X98-010407	2
		X98-030404	1
X18-140177	1	X98-040379	6
X18-140258	4	X98-100386	1
X18-170207	3		
X18-170258	1, 2		
X18-170306	1		
X18-170358	4		
X18-200458	1		
X18-200557	4		
X19-170306	1		
X32-401101	6		
X32-401131	4, 6		
X32-401171	2, 4, 5, 6		
X32-401201	3		
X32-502113	6		
X32-502622	3		
X32-502624	5		
X34-100571	5		
X61-8686	3, 7		
X61-8688	7		
X61-8689	7		
X61-8690	7		
X61-8691	7		
X71-1164	3, 7		
X91-140208	5		
X91-142525	4		
X91-142527	5		
X91-143017	6		
X91-143512	1		
X91-143556	2		
X91-143559	3		
X91-143560	4		
X91-171416	3		
X91-173425	2		
X91-173537	1, 2		
X91-173540	2		
X91-173542	2		
X91-173543	3		

CANON REPAIR GUIDE

NEW CANONET 28
(REF. NO. 1.30821)

CANON INC. JAPAN

C O N T E N T S


Introduction	1
1. Disassembly	2
1.1 Top Cover	2
1.2 Base Cover	3
1.3 Front Plate	4
1.4 Front Lens Unit	5
1.5 Pin Metal	6
1.6 ASA Ring	7
1.7 Exposure Meter Unit	8
2. Replacement and adjustment	9
2.1 Replacement and adjustment of Shutter	9
2.2 Replacement and adjustment of Exposure Meter Unit ..	13
2.3 Adjustment of Spool torque	16
2.4 Adjustment of parallax	17
2.5 Adjustment of Range Finder	17
3. Appendix	18
3.1 Circuit diagram	18

INTRODUCTION

- 1) The New Canonet 2.8 is based on the New Canonet QL 17 and 19. Therefore, in this Repair Guide, only the parts which differ from New Canonet QL 17 will be described. Use this Guide together with the New Canonet QL (1-30801) Repair Guide.
- 2) Only the operation of the shutter can be checked separately. The Exposure Value cannot be checked until it is combined with Meter unit. To measure the EV accurately, the EE tester must be used.
- 3) There is difference between the reference value for simple measurement of FA accuracy ("X" synchronization) and the calculated value obtained on the basis of Guide Number of the flash. This is because the flash switch-ON time does not coincide exactly with the fully opened position of the shutter blade, as the shutter is a flywheel type shutter (a strong inertia works on movement of the blade.).
- 4) For setting the shutter speed required for measuring focus to "B", the following procedures must be taken; first remove Top Cover and then Leather. Detach Front Cover, push down Shutter Opening Lever with Shutter Button depressed and fix the Lever. See para. 2.1.4 in this Guide.

1. Disassembly

1.1 Top Cover

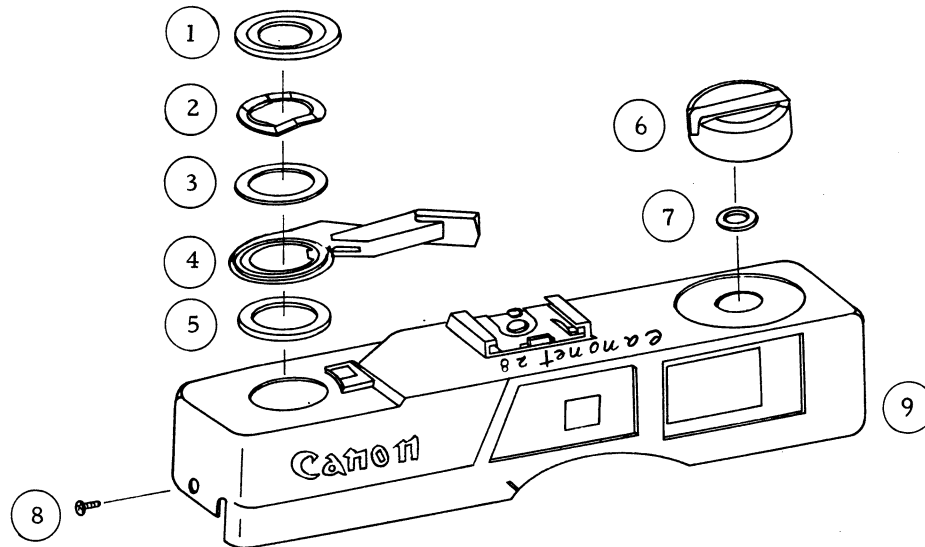

1. Winding Lever (4)

1 Shutter Button Guard
13-9105

2 Washer
13-4615

3 Washer
X98-100386

4 Winding Lever
19-0579

5 Washer
13-9106

2. Rewind Crank (6)

6 Rewind Crank
13-9169


7 Washer
X98-030405

3. Top Cover (9)

8 Screw
X16-170306 x 3

9 Top Cover
19-0901

1.2 Base Cover

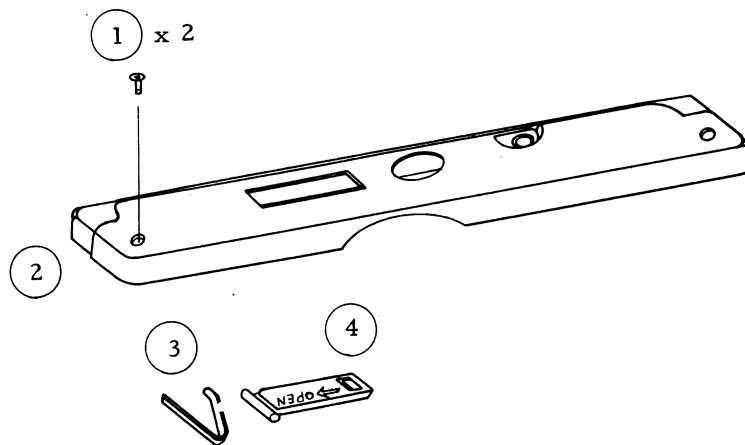

1. Base Cover (2)


1 Screw
X18-170306 x 2

2 Base Cover
13-9103

3 Plate Spring
97-7600

4 Battery Box Cover
13-9276

1.3 Front Plate

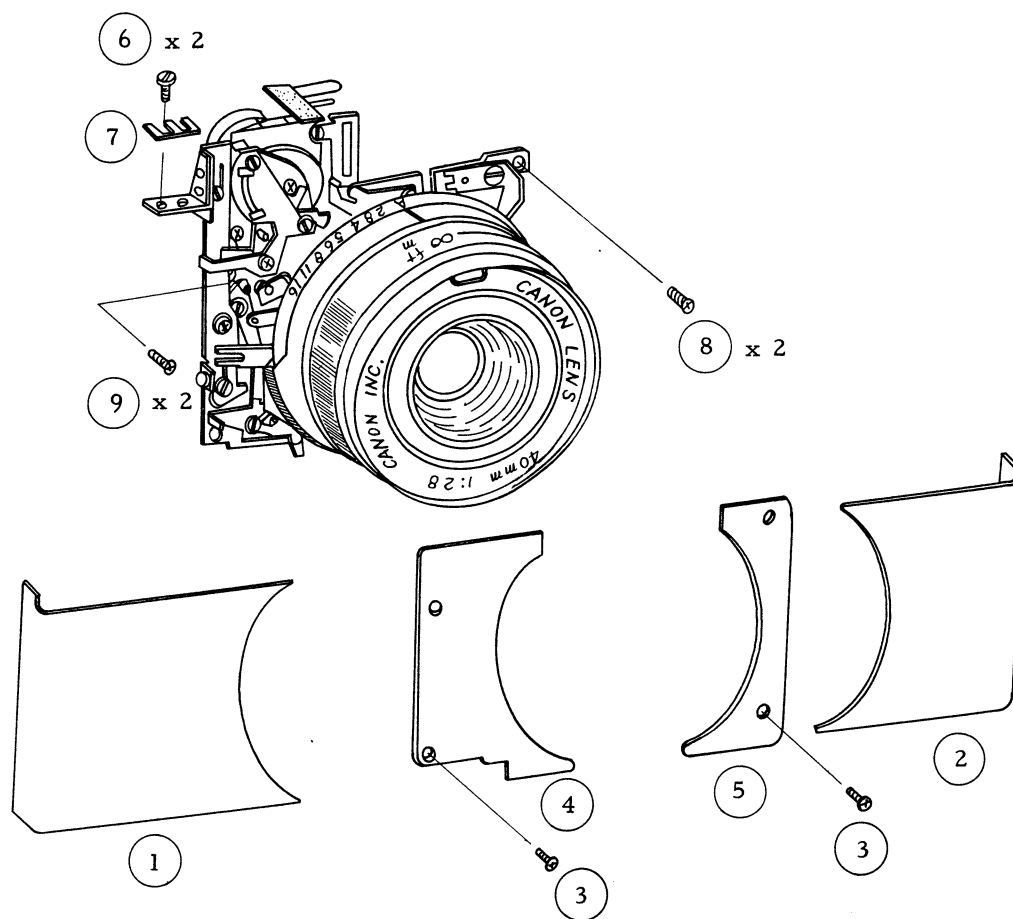

1. Front Covers right
and left (4) and (5)

1 Leather (left)
14-2845

2 Leather (right)
13-9204

3 Screw
X18-170258 x 4

4 Front Cover (left)
13-9201

5 Front Cover (right)
13-9202

2. Front Plate


6 Screw
X91-172537 x 2

7 Adjusting Washer
13-9228

8 Screw
X16-200458 x 2


9 Screw
X18-200458 x 2

1.4 Front Lens Unit

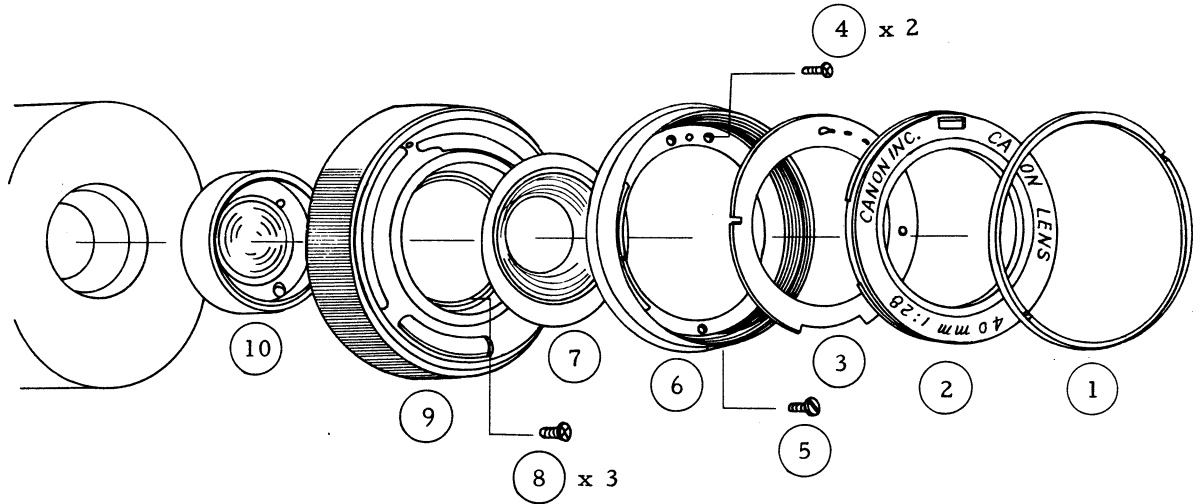

- | | | |
|----------------------------|-------------------------------------|--------------------------------------|
| 1. Front Ring (6) | 1 <u>Assemble Collar</u>
27-8639 | 2 <u>Name Ring</u>
19-0907 |
| | 3 <u>Diaphragm Plate</u>
14-2834 | 4 <u>Screw</u>
X18-170257 x 2 |
| | 5 <u>Screw</u>
X91-173543 | 6 <u>Front Ring</u>
14-2833 |
| 2. Front Lens Unit
(10) | 7 <u>Ring</u>
14-2832 | 8 <u>Screw</u>
X91-172496 x 3 |
| | 9 <u>Focus Ring</u>
27-0208 | 10 <u>Front Lens Unit</u>
18-0544 |

1.5 Metal Pin

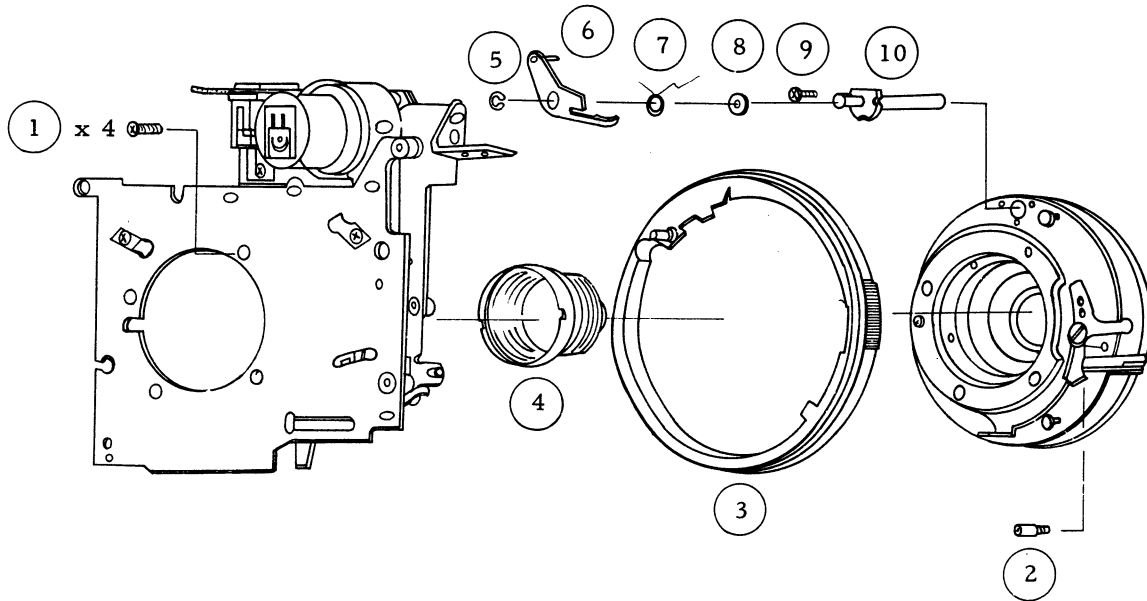

1. Aperture Ring (3)

1 $\frac{\text{Screw}}{\text{X16-170357}} \times 4$

2 $\frac{\text{Screw}}{\text{X91-171416}}$

3 $\frac{\text{Aperture Ring}}{14-2821}$

4 $\frac{\text{Rear Lens Unit}}{18-0545}$

2. Metal Pin

5 $\frac{\text{Retaining Washer}}{\text{X32-401201}}$

6 $\frac{\text{Lever}}{19-0904}$


7 $\frac{\text{Spring}}{97-6848}$

8 $\frac{\text{Washer}}{\text{X32-502622}}$

9 $\frac{\text{Screw}}{\text{X16-140207}} \times 3$


10 $\frac{\text{Metal Pin}}{14-2816}$

1.6 ASA Ring

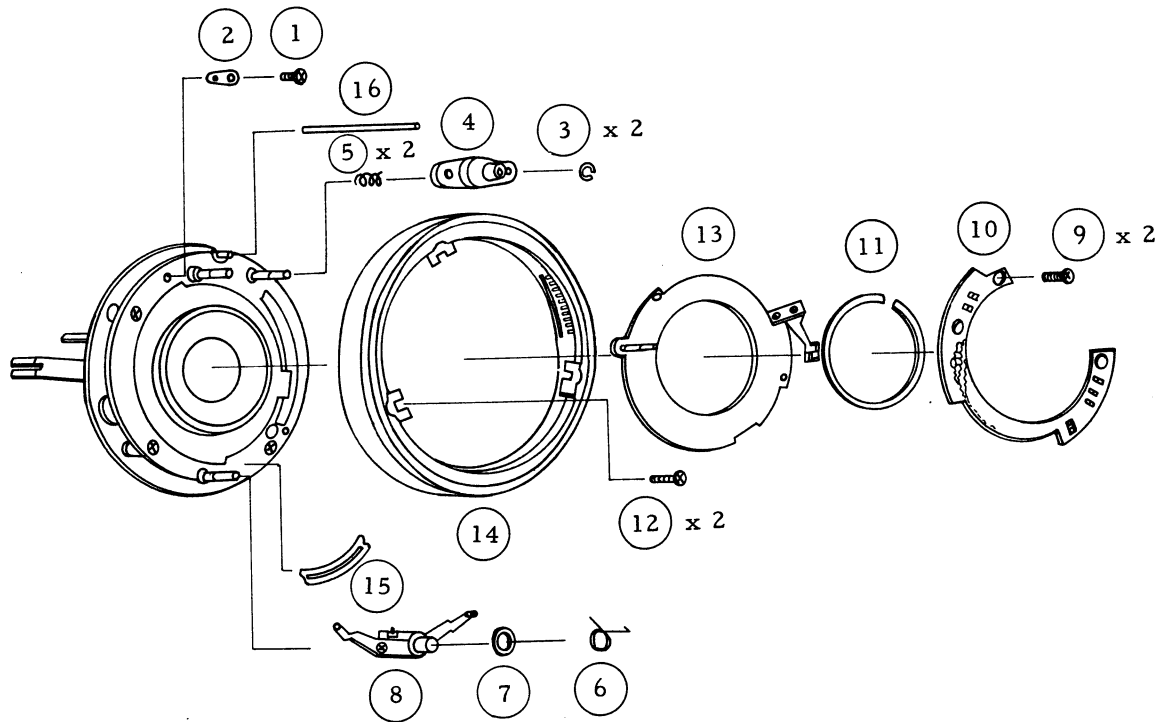

- | | | |
|------------------|---|----------------------------------|
| 1. CdS (4) | 1 <u>Screw</u>
X16-170307 | 2 <u>Lug</u>
14-2843 |
| | 3 <u>Retaining Washer</u>
X32-401201 | x 2 |
| | 4 CdS | 5 <u>Coil Spring</u>
97-5832 |
| | | x 2 |
| 2. ASA Ring (14) | 6 <u>Spring</u>
97-6849 | 7 <u>Washer</u>
14-2829 |
| | 8 FA Change Lever | 9 <u>Screw</u>
X16-170207 |
| | | x 2 |
| | 10 <u>Resistor Plate Unit</u>
19-0913 | 11 <u>Snap Washer</u>
26-8067 |
| | 12 <u>Screw</u>
X16-170307 | x 2 |
| | 13 <u>ASA Plate</u>
19-0905 | 14 ASA Ring |
| | 15 <u>Printed Circuit Board</u>
X61-8687 | 16 <u>Pin</u>
14-2817 |

1.7 Exposure Meter Unit

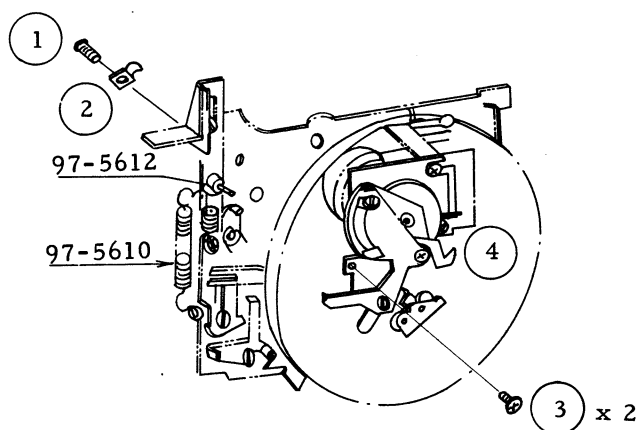


1. Lead Holder (2)	1 <u>Screw</u> X91-143559	2 <u>Lead Holder</u> 13-9242
2. Exposure Meter Unit (4)	3 <u>Screw</u> X18-170258 x 2	4 <u>Exposure Meter Unit</u> 18-0542

2. Replacement and Adjustment

2.1 Replacement and adjustment of Shutter


1. Disassembly
See Para. 1.5 and 1.6.
2. Checking of detached shutter
Check Shutter charge and release.

Note: Shutter speed cannot be checked.

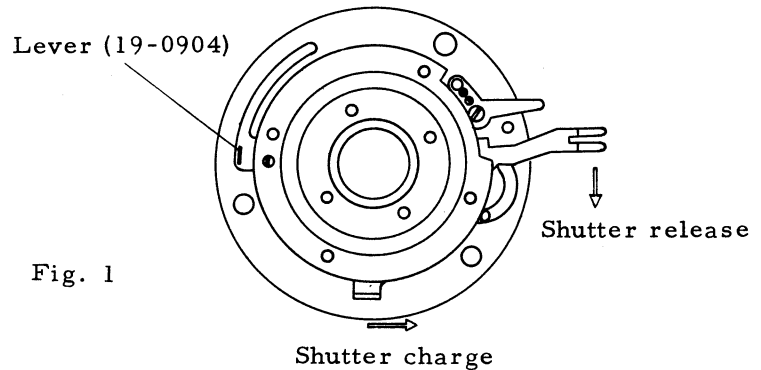


3. Installation

- 1) Mounting Metal Pin
Reverse the procedure of Para. 1.5.
Install the Pin turning its flat side toward the Aperture Ring.

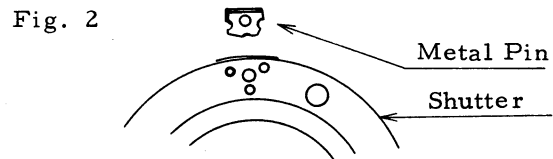

- 2) Mounting Aperture Ring
 - a. Keep Diaphragm Lever turned counterclockwise.
 - b. Bring the Lever Pin to the Aperture Ring Cam.
 - c. Insert the Aperture Ring until it bottoms with 3 dowels on the shutter fitted to 3 notched parts of the Ring.
 - d. Install the Ring with Screw (X91-171416).

Fig. 3

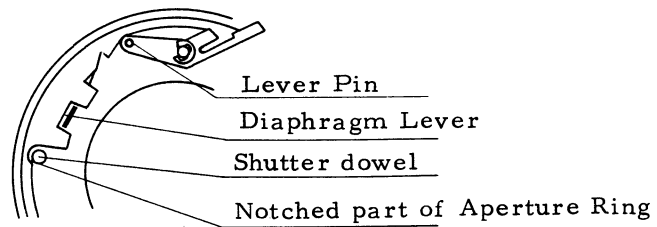

3) Mounting Front Plate

- a. Pass three leads (black, purple and red) from the Shutter through the notched part of Front Plate and the yellow one from CdS through the hole in the Plate.

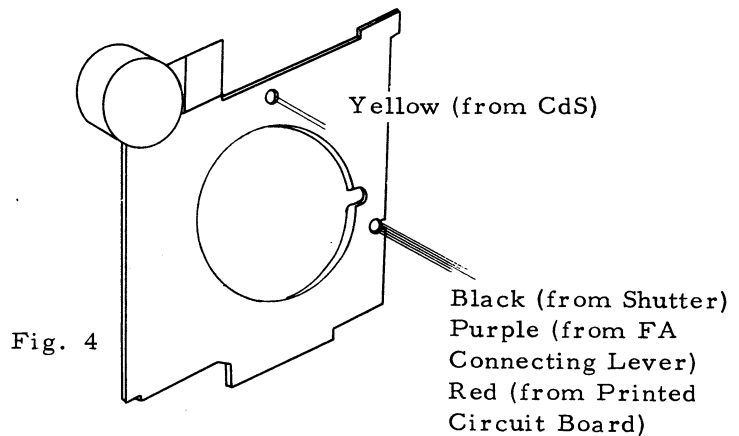


Fig. 4

- b. Set the Charge Ring "Section A" to the arrow-marked "A". Set the Aperture Connecting Pin "B" to the arrow-marked "B". (Fig. 5)


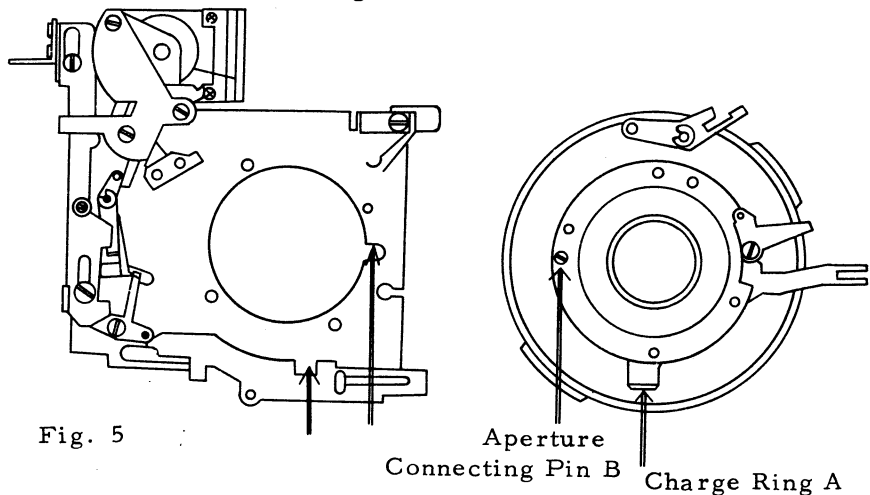


Fig. 5

- 4) Fasten with four Screws (X16-170357)
- 5) Mounting Rear Lens Unit

Note: Apply Light Shield to the Rear Lens Unit to prevent light leakage.


- 6) Solder the leads
See Fig. 11.

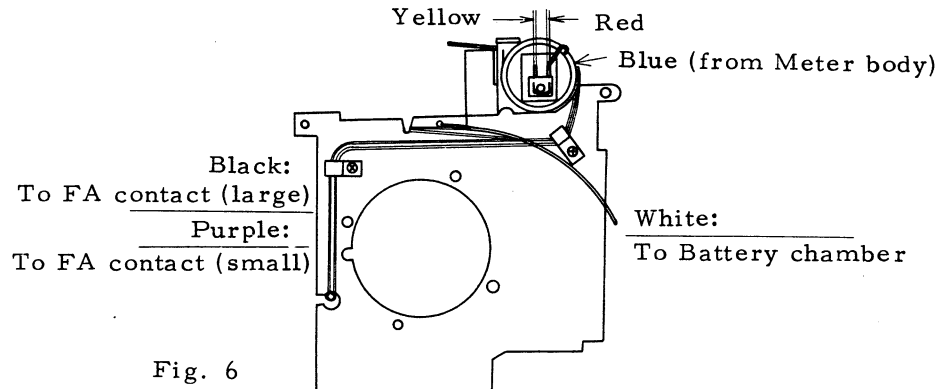

- 7) Mount the Shutter on the Body
See Pages 9 and 10 in the New Canonet QL Repair Guide Para. 2.3.3 to 2.3.7.
- 8) Mount the FA Change Lever
See Para. 1.6.
- 9) Mount the Front Lens Unit

4. Adjustment

- 1) Shutter release

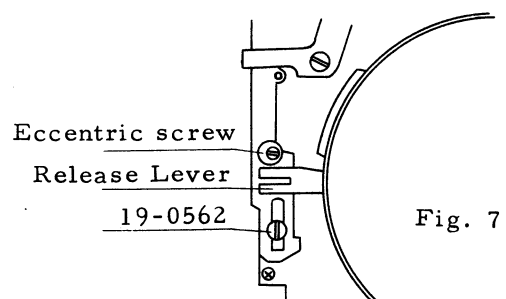

Shutter must be released at the position 4.1 ± 0.2 mm from the top of the Shutter Button stroke and the Shutter button must have an excess stroke of 0.5 mm or more when released. Adjust the release position with the eccentric screw on Shutter Release Lever.
If there is less than 0.5 mm excess stroke,

expand the forked end of the Release Lever.
(Fig. 7)

- 2) Adjustment of Winding Safety Mechanism (double winding prevention)
See Para. 2.4.2. in the New Canonet QL Repair Guide.
- 3) Adjustment of initial Film Feeding (Feeding leader section)
See Para. 2.4.4. in the New Canonet QL Repair Guide.
- 4) Adjustment of focus (contrast focus)
Limit: ± 0.03 mm (± 1.5 mm on the 200 mm T-type 200 mm collimator scale) For the center value, check several new New Canonet 2.8 cameras to establish the average value.


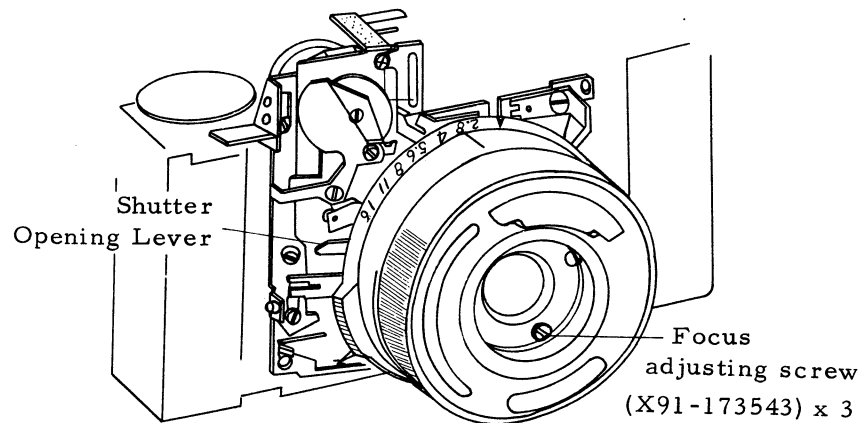


Fig. 8

Maximum Aperture

Setting Aperture Ring to F2.8, press down the Shutter Release Lever with Shutter Button depressed and fix the Lever.

- 5) Adjustment of Aperture Ring

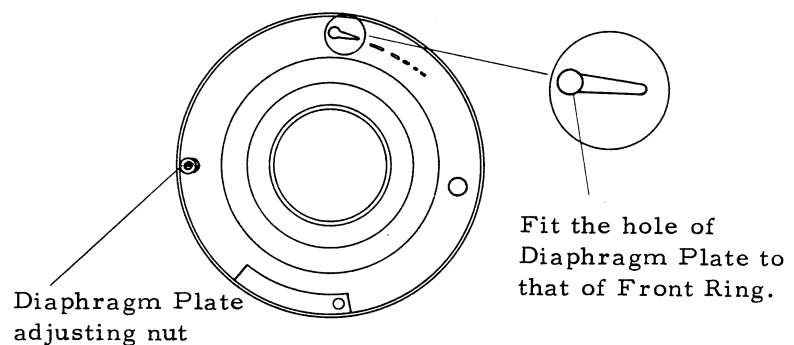

2.2 Replacement and adjustment of Exposure Meter Unit

1. Disassembly
See Para. 1.7.

2. Meter Checks
There are no checks for the meter alone.

Notes: 1. Replace the CdS and Meter as a unit.
2. Don't bend the needle.

3. Installation

1) Mounting Meter

- Install the Meter with Aperture Ring set to AUTO.
- The needle clamber should be positioned at the right of Shutter Lock Lever.

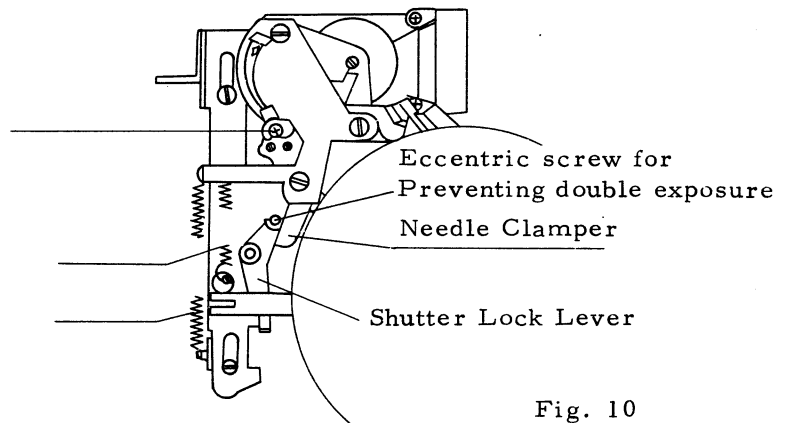


Fig. 10

- Mount the Spring.
- Solder the leads.


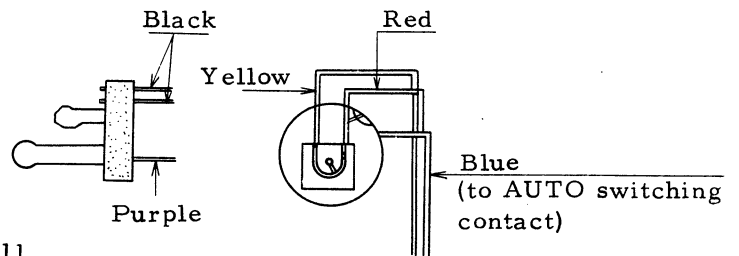


Fig. 11

4) Mount the Lead Holder

Fig. 12

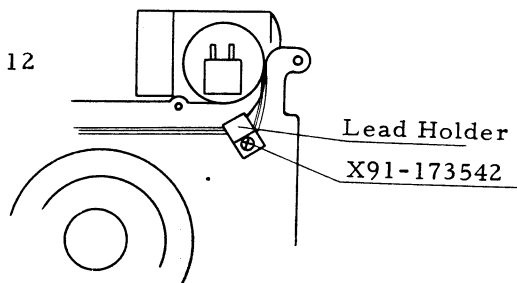

4. Adjustment

1) Inspection of EE accuracy

To check EE accuracy, use the EV tester.

K=17.5

EV	cd/m ²	ASA	Shutter speed	Aperture(F)	Limit(EV)
9	89.6	100	1/64	2.8	±0.7
12	716.8	100	1/160	5.05	±0.7
15	5734.0	100	1/360	9.6	±1.0

2) Adjustment of EE accuracy

- To adjusting the deflection angle of the clamp needle, see Para. 2.4.5. in the New Canonet QL Repair Guide.
- Adjust the Exposure Meter accuracy with the eccentric screw and tighten the setscrew.

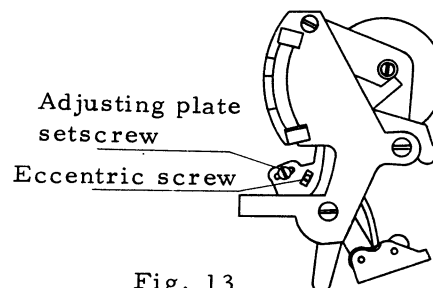


Fig. 13

3) Alternate check of EE accuracy (using a calibrated light source)

This method should be used only until the EV Tester is available. Adjustment should be made only if the shutter is definitely wrong.

at EV 11 - needle points to $\frac{1}{60}$

EV	cd/m ²	ASA	Shutter speed	Aperture(F)	Limit(F)
11	358.4	100	1/122	F4.7	±0.7
14	2867.0	100	1/275	F7.7	±0.7

Compare Aperture diameter with Manual diaphragm.

- 4) Adjustment of Viewfinder needle position
If the meter needle is clamped at the marked line of EV 11, the needle must point to 1/125. The needle (Viewfinder) position is adjustable by bending the needle.

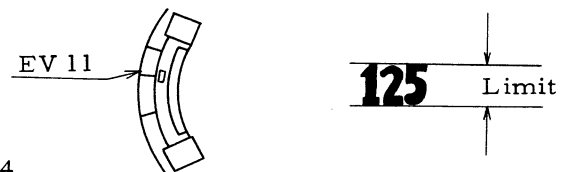


Fig. 14

- 5) Adjustment of space between meter needle and clamper.
See the New Canonet QL Repair Guide.
- 6) Safety adjustment in case of incorrect exposure
See the New Canonet QL Repair Guide.
- 7) Adjustment of Lever

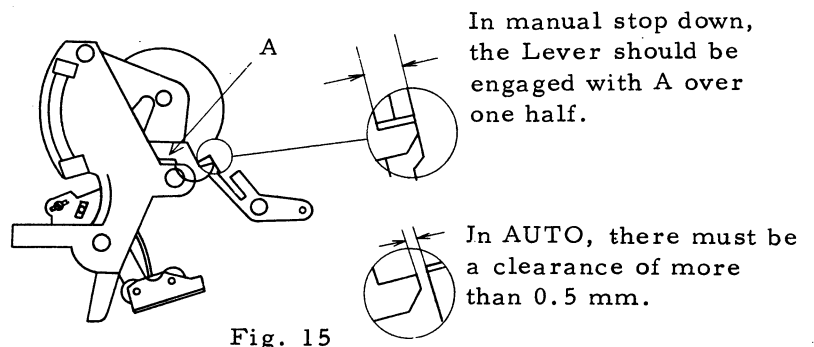


Fig. 15

- 8) Inspection of FA accuracy
 - a. Sync system
Sync contact is made when the automatic lever of Shutter hits the control plate of Meter, and since the Shutter blade has an inertia force, movement of the Shutter blade and the automatic lever does not coincide exactly with each other. Therefore, a compensation system has been employed, in which correct exposure can be obtained for flash by compen-

sating with the meter during manufacrure.

b. Inspection of FA accuracy

With the front of CdS shielded, set the Focusing Ring to 2.4m ("∞" side of the figure 2 should be set to the index mark.)

When the Canolite D is fully charged and the ASA set to 100, the needle in the Viewfinder should show a Shutter speed of 1/125 sec.

Note: Be sure to check the Viewfinder needle accuracy first.

9) Adjustment of FA accuracy


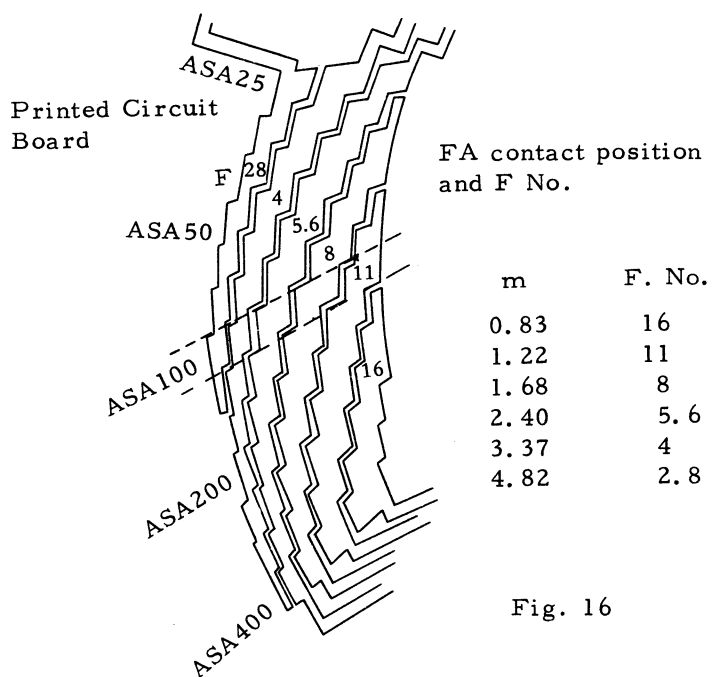


Fig. 16

Fig. 17

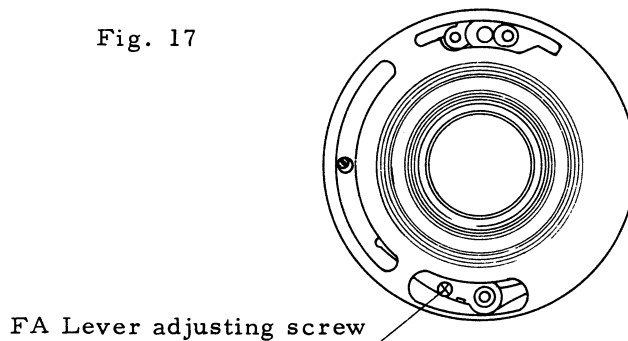


2.3 Adjustment of spool torque

1. Spool torque check

Limit: 150 ± 30 g/cm (Use a spring balance.)


Fig. 18

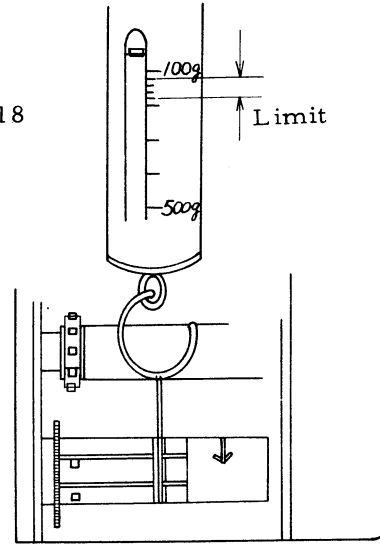

2. Adjustment of spool torque
Exchange Spring (97-6847).

Note: Don't expand the Spring too much.


Fig. 19

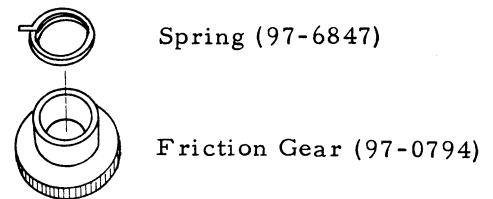

2.4 Adjustment of parallax

The Bright Frame must indicate between 80 to 90% of the actual frame.

Fig. 20

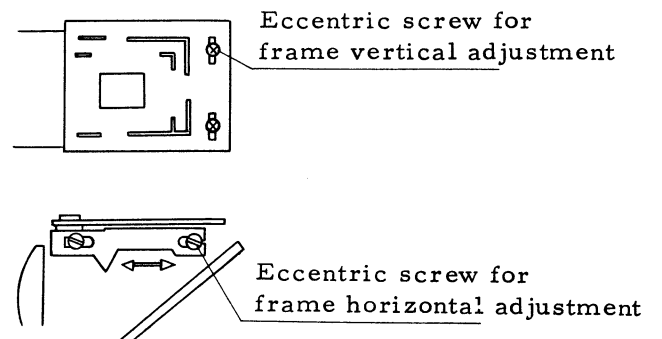


2.5 Adjustment of Range Finder

See Para. 2.3. in the New Canonet QL Repair Guide.

3. Appendix

3.1 Circuit diagram

Part No.	Description	Part No.	Description	Part No.	Description
X71-1164	Shutter	14-2849	Contact	X61-8690	Lead (brown)
14-2839	Diaphragm	14-2813	Contact	19-0913	Printed Circuit Board
X61-6891	Lead (black)	14-2815	Contact	X61-8688	Lead
X61-4065	CdS	X62-4102	Battery (H-D)	X64-0902	Variable Resistor
14-2843	Lug	14-2847	FA Contact (sync)	X64-7108	Galvanometer
X61-8687	Distance Resistor	13-9262	FA Contact (meter)	X61-8689	Lead (white)

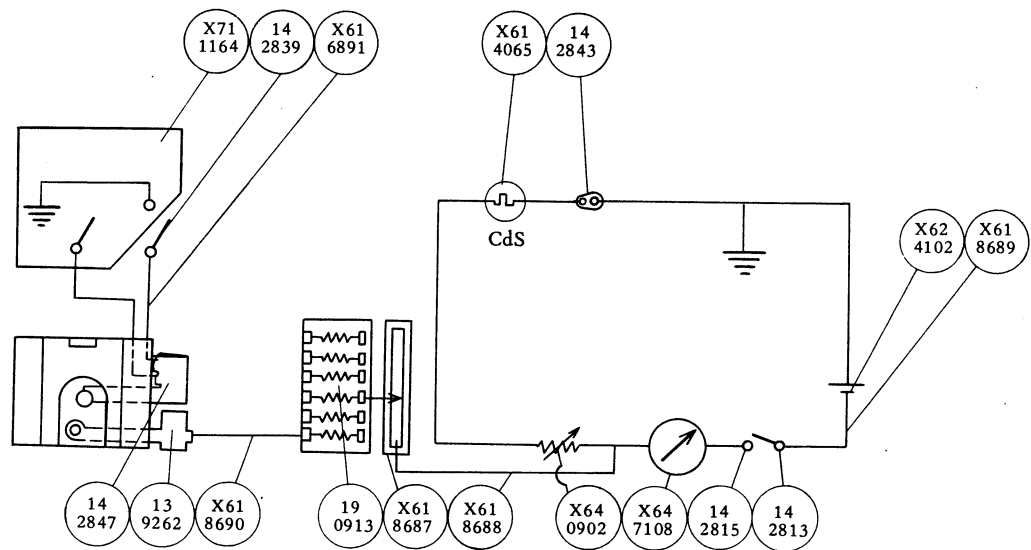

CANON SERVICE TOOLS LIST


NEW CANONET 28
(REF. NO. 1-30821)

TEST EQUIPMENT

<u>Use</u>	<u>Name of Test Equipment</u>
Focus	1. 200mm T-type Collimator
	2. Reflection Mirror for 35mm
Field of View	1. Universal Parallax Collimator-1
Exposure Meter	1. E. E Camera Tester
	2. Inspection Device for Canon Meter-1
	3. Standard Checker-2 (CdS)
	4. Ohm Meter


SPECIAL SCREW DRIVERS

T06A-13-4611-1T

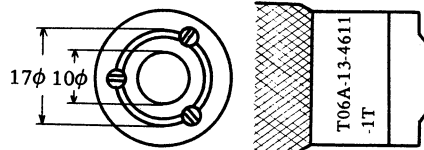


Tightening
Winding Lever
(Common to
Canonet QL)

T06A-27-8639-1T

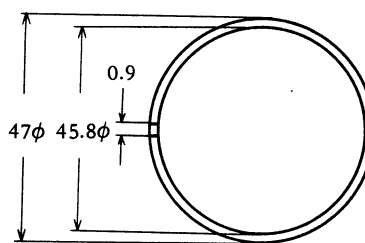


Tightening Name
Ring
(Common to
Canonet QL)

T0630-14-2830-1S

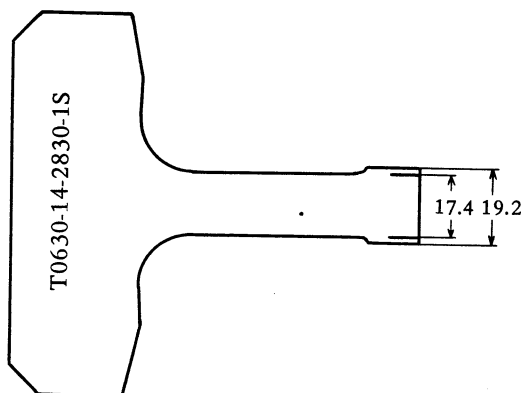

Tightening Rear
Lens Unit

T0630-27-1390-1T

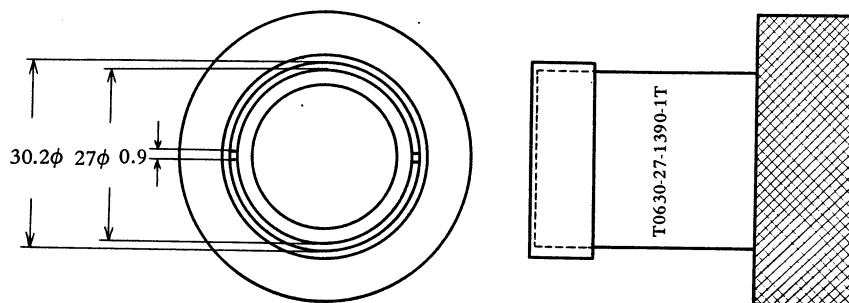

Tightening
Front Lens Unit



Canon NEW CANONET 28 Back Cover Unit

Back Cover Unit(18-0547) has replaced Back Cover (19-0902).
18-0547 includes 13-9215 and 13-9216.

19-0902	}	→	18-0547
13-9215			
13-9216			

Back Cover(19-0902) has been deleted from the Spare Parts List. 13-9215 and 13-9216 are still available as spare parts.

The serial Number Plates'(97-9181 and 97-9429) CLASS has been changed from E to D.

Added Parts:

Class	Part No.	Qty.	Description
D	18-0547	1	Back Cover Unit

1. File this report in the service manual binder New Canonet 28 (C-033) pg. 1/1
2. Post additional parts, modified parts, etc. in the repair manual (disassembly drawings, parts list and index).
3. Check the file numbers of the service manual reports. If any are missing, request them from us.

Canon SERVICE MANUAL REPORT

Serial No. AC33-012 E

Service Manual No. C-033

Issued by Camera Service Department, Canon Inc.

Date 1972/2/9

Canon New CANONET 28 Changes

1. Ratchet Claw

1.1 Change

The dowel on Ratchet Claw(19-0536) which held Spring(97-5614) has been deleted. The spring now mounts in the hole so one end of the spring has been rotated 90°.

Old



19-0536

New



13-9114



97-5614



97-5614-050

1.2 Repair

Old or new parts can be used in any camera as a set but mixed old and new parts cannot be used.

1.3 Classification

Seconic Meter Cameras: From Body No. 230001

Canon Electric Meter Cameras: From Body No. 510001

2. Rewind Crank Change

2.1 Change

Retaining Washer(X32-401242) has been added to Rewind Crank Shaft(13-9289) to hold the rewind crank together when it is removed. The shaft has been changed slightly to hold the washer.



13-9289



X32-401242
(Added)

Groove added

2.2 Repair

Old and new parts are interchangeable. Old parts will be stocked until exhausted.

2.3 Classification

Canon Electric Meter Cameras : From Body No. 510001

Seconic Meter Cameras : From Body No. 230001

3. Repair Manual Part Number Changes

Page	Old Number	New Number
1	X18-200458	X18-200358
4	X91-143560	X99-0047

Added Parts

Class	Part No.	Qty.	Description	Price
	X32-401242	1	Retaining Washer	\$0.01

Canon SERVICE MANUAL REPORT

Serial No. AC33-011 E

Service Manual No. C-033

Issued by Camera Service Department, Canon Inc.

Date 1971 / 10 / 29



Canon NEW CANONET 28 FA Lever Change

1. Change

Originally Spring(97-6849) was too strong and would move FA Lever(19-0906) away from the correct position when the lens was focused close to infinity (). To correct this problem another Spring(97-5863) was added by SMR AC33-002 E. Now, to permanently correct the trouble, the shape of Resistor Change Lever(14-2835) has been changed. The dowel on 19-0906 fits in the slot added to 14-2835 so it cannot be moved by Spring (97-6849) in the way it was before.

14-2835

OLD



NEW



With the new 14-2835, Spring(97-5863) is no longer needed.

2. Repair

Old and new parts are interchangeable. Camera Service will stock new parts only.

If FA Lever(19-0906) moves out of place, install the new Resistor Change Lever(14-2835).

3. Classification

The new lever is installed in all cameras from body numbers:

Sekonic meter cameras : 204281

Canon Elect. meter cameras : 507181.

Canon SERVICE MANUAL REPORT

Serial No. AC33-010 E

Service Manual No. C-033

Issued by Camera Service Department, Canon Inc.

Date 1971 / 10 / 22



Canon NEW CANONET 28 Changes

1. FA Contact Changes

1.1 Change


The lead to FA Contact(19-0908) becomes brittle at very low temperatures (below -20°C) and automatic flash does not function correctly. It has been changed to a different type that is thinner and does not get brittle. The color of the new lead is white instead of purple.

Note: A few cameras were made with the improved lead in purple.


Lead	Y00-2212	Y00-2801
Conductor diameter	0.15mm	0.08mm
Outside diameter	0.76mm	0.65mm
Color	Purple	White

To smoothen FA operation Spring(97-6849) has been changed as shown.

Unit: mm



Coil ID= 4



Coil ID= 4.1

1.2 Repair

Old and new parts are interchangeable. If cold weather problems with FA are encountered, change the lead and spring. Camera Service will stock new parts only.

1.3 Classification

Change is effective from camera body numbers:


Canon Elec. metered camers: 507181

Sekonic metered cameras: 204281

2. Printed Circuit Board

2.1 Change

FA did not function properly when the ASA was set to 32 or 64 occasionally, so two parts of the pattern that extended to the edge of the board have been removed.

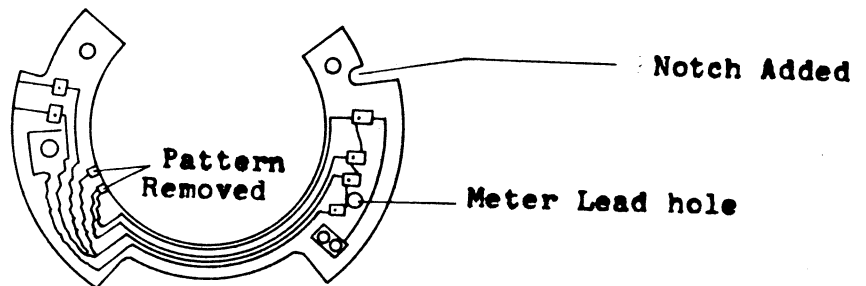

2.2 Repair

Old and new parts are interchangeable and old parts can also easily be modified by removing the two parts of the pattern shown above. If FA fails to function properly, change the part or remove the two parts of the pattern.

Note: This change effects cameras with Sekonic meters only.


2.3 Classification

This change is effective on Sekonic meter cameras from body number 206901.

3. Counter Window Change

3.1 Change

The transparent and opaque parts of the counter window have been reversed as shown.

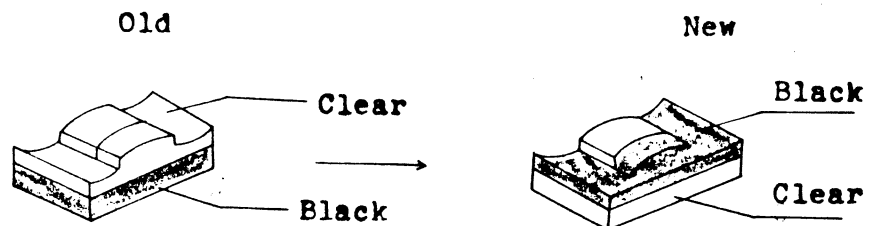

3.2 Repair

Old and new parts are interchangeable. Camera Service will service new parts only.

3.3 Classification

This change is effective from cameras bearing body numbers:


Canon Elec. meter cameras : 507881

Sekonic meter cameras : 207301

4. Sprocket Screw Change

4.1 Change

To prevent film overlap, the upper of the two Screws(X91-142535) in Rewind Button(13-9130) has been changed to Screw(X91-142534) which has a larger head. It is also black nickel plated .

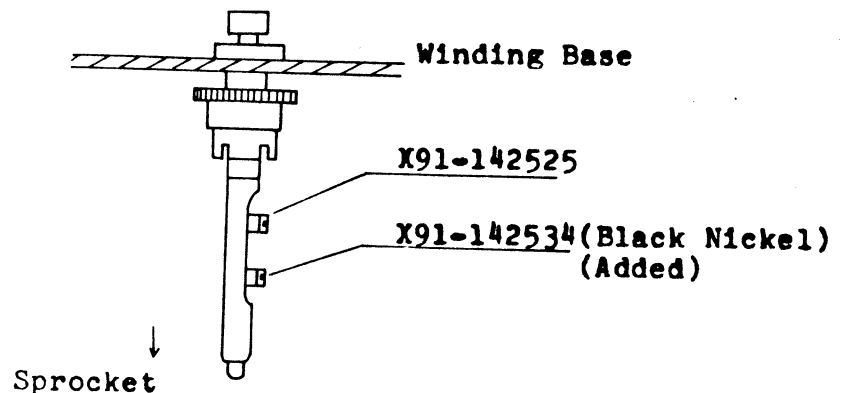

4.2 Repair

Old and new parts are interchangeable . Both types of screw are stocked.

If overlap occurs, install the new screw.

4.3 Classification

This change is effective from camera body numbers:

Canon Elec. metered cameras: 507901

Sekonic metered camers : 207681


5. Accessory Shoe Change

5.1 Change


To prevent flashing during installation and removal of a flash unit, a raised collar has been added around the syncro contact in Connector, Flash Terminal(13-9208) and it has been relieved 3mm at the rear so the Canolite D is not difficult to install.

13-9208

Old



New



5.2 Repair

Old and new parts are interchangeable. Camera Service will stock new parts only.

5.3 Classification

This change is effective with cameras from body numbers:

Canon Elect. metered cameras : 507901

Sekonic metered cameras : 207681

Additional Information:

In the Repair Manual on pages 3 and 7 make the following part number change.

X61-8686

X61-8687




Canon NEW CANONET 28 Printed Circuit Board and Lead Changes

1. Printed Circuit Board Changes

1.1 Change

The current/ deflection angle curve (I/) of the Sekonic meter has been changed. This requires a change in resistor values on Printed Circuit Board(19-1006) to produce correct automatic flash exposure

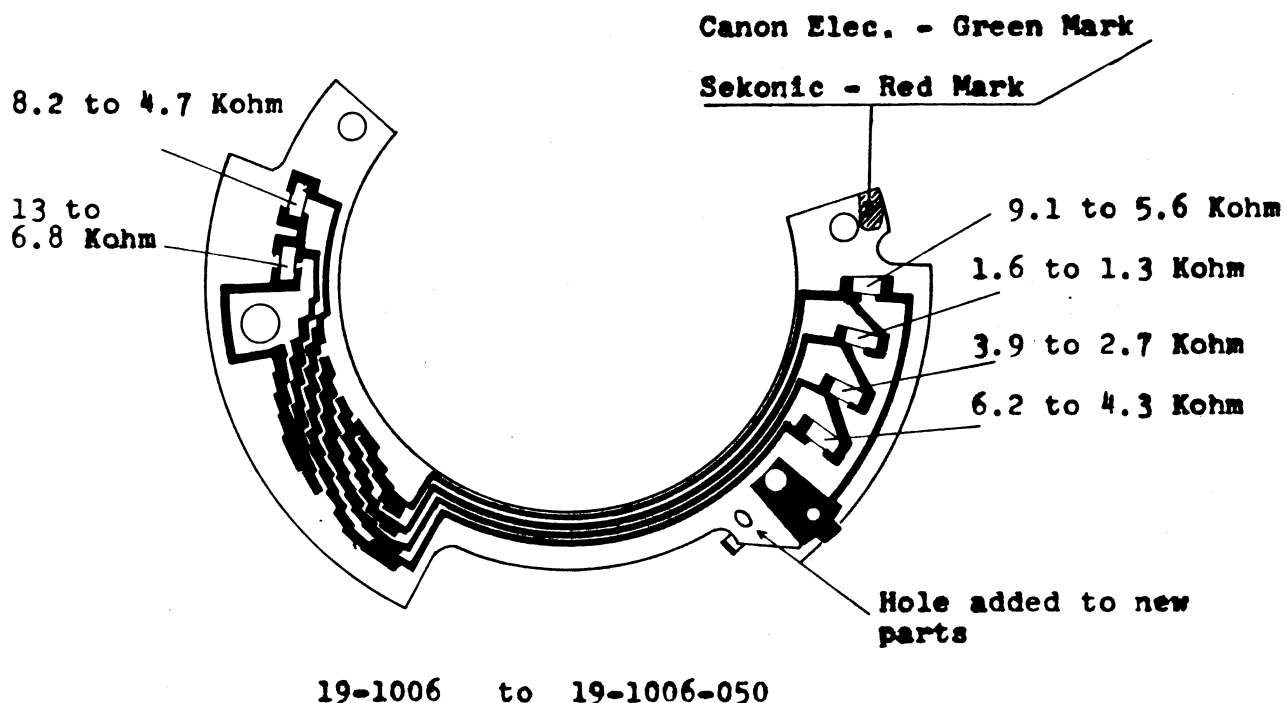

1.2 Repair

There are two different meters used in the Canon New Canonet 28 but only the Sekonic meter is stocked as spare parts at the present time. Printed Circuit Boards(19-1006 and 19-1006-050) are for use with the old or new Sekonic meter only. If a Camera with the Canon Elec. meter requires a new meter, the PCB must also be changed.

Sekonic meters have a meter needle with a flat root, and a green mark on the PCB as shown above.

Canon Elec. meters have a meter needle with a round root and a red mark on the PCB.

Camera Service will stock only the old type Sekonic Meter and both old and new printed circuit boards for the Sekonic meter.

1.2 Repair(cont.)

In cameras with the old Sekonic meter(Flat needle root and body number under 208901) both the Meter Unit (18-0505) and Printed Circuit Board(19-1006) can be changed separately.

In cameras with the new Sekonic meter(Flat needle root and body numbers from 208901) PCB(19-1006-050) can be replaced separately; but if the meter unit is replaced, the old PCB (19-1006) must be installed also.

In cameras with the Canon Elec. meter(Round needle root and red mark on PCB) the meter and PCB must be replaced as a unit only.


1.3 Classification

The new meter and PCB are installed in cameras with Sekonic meters and body numbers from 208901.


2. Lead Color Change

The color of the lead from the meter to the FA contact has been changed from purple to white.

EXPLODED VIEW
of
CANON NEW CANONET 28

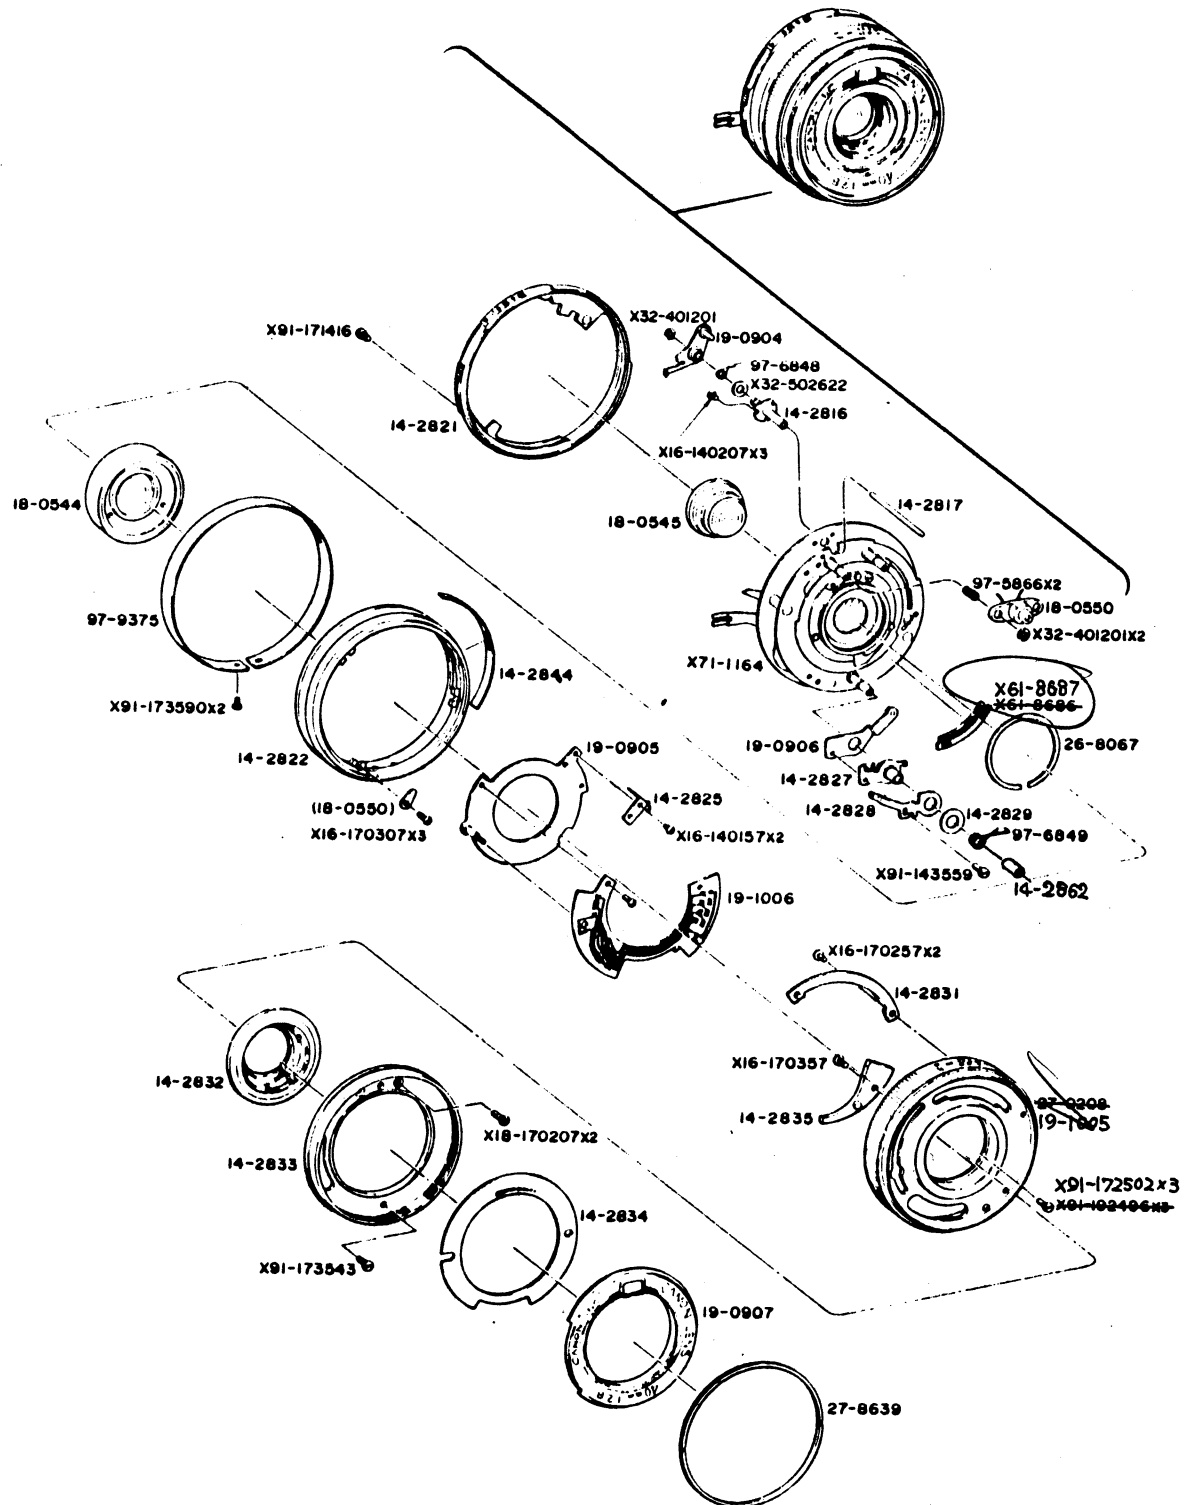


EXPLODED VIEW
of
CANON NEW CANONET 28

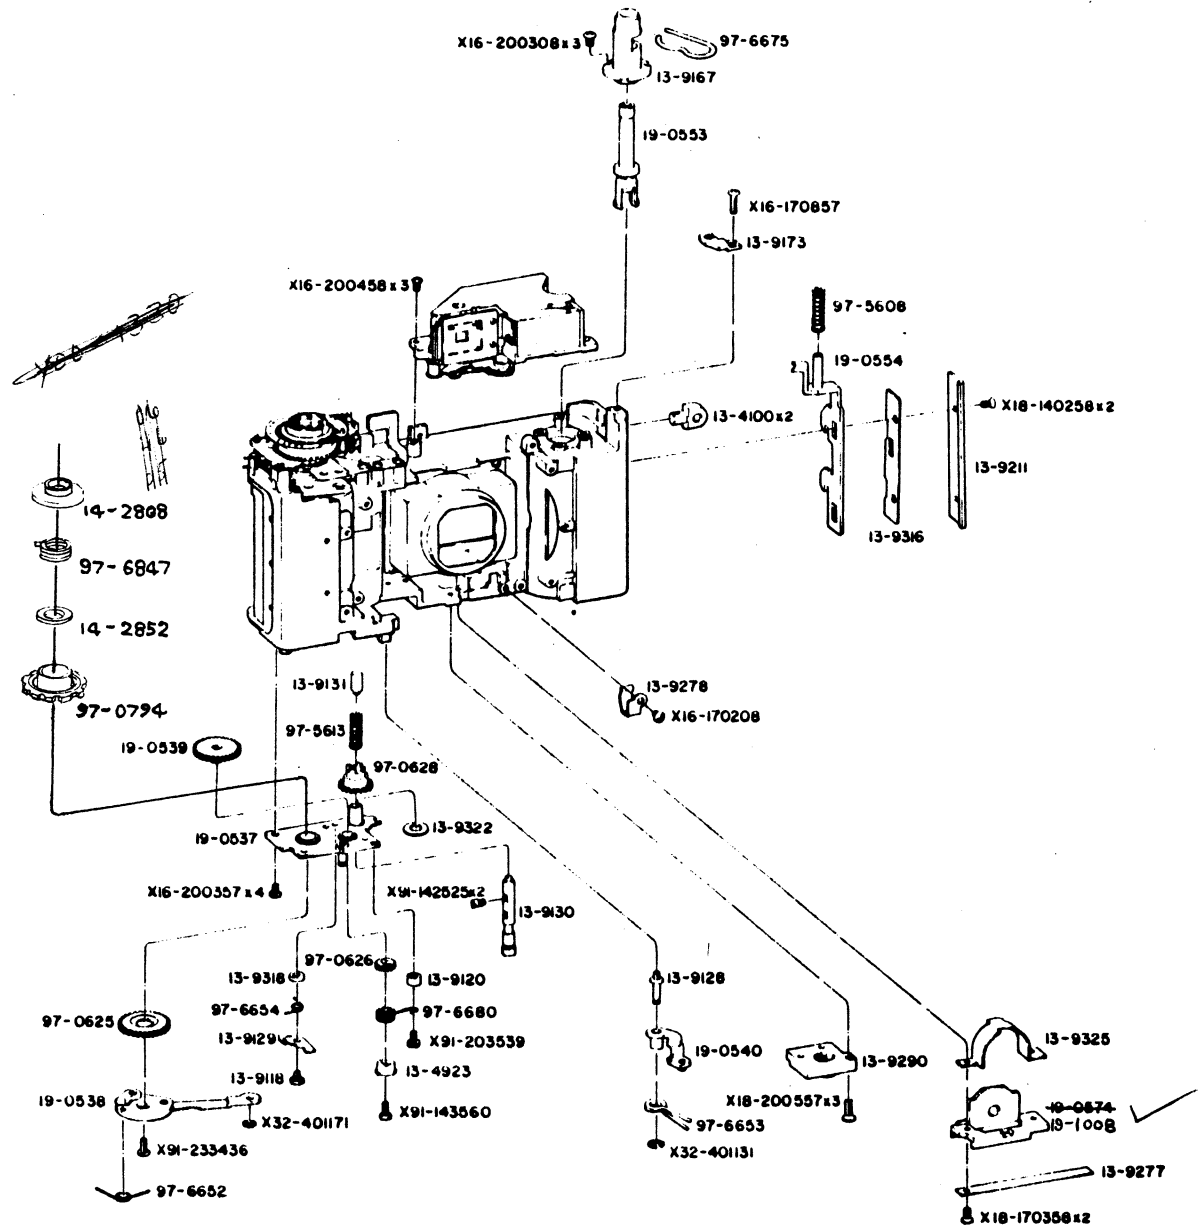

Canon New Canonet 28 Parts Changes

1-1 Spring Change

To improve the return of Shutter Charge Lever(19-0564) the return spring was changed. The part number was changed from 97-5611 to 97-5873.

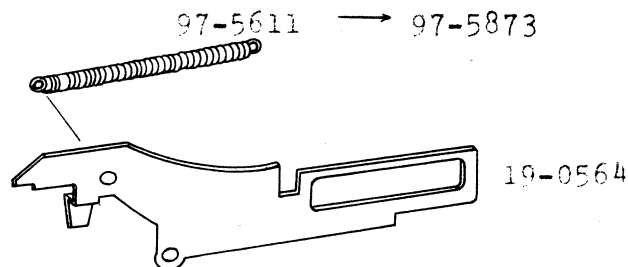


1-2 Repair

New and old parts are interchangeable. Only new parts will be stocked.

2-1 Screw Head Change

Three screws (X91-172496) in Focusing Flange(27-0208) could slightly touch the front lens unit and make infinity adjustment impossible. Therefore the head diameter of the screw has been changed and the part number is changed from X91-172496 to X91-172502. The head diameter was reduced from 3.0 to 2.8mm.

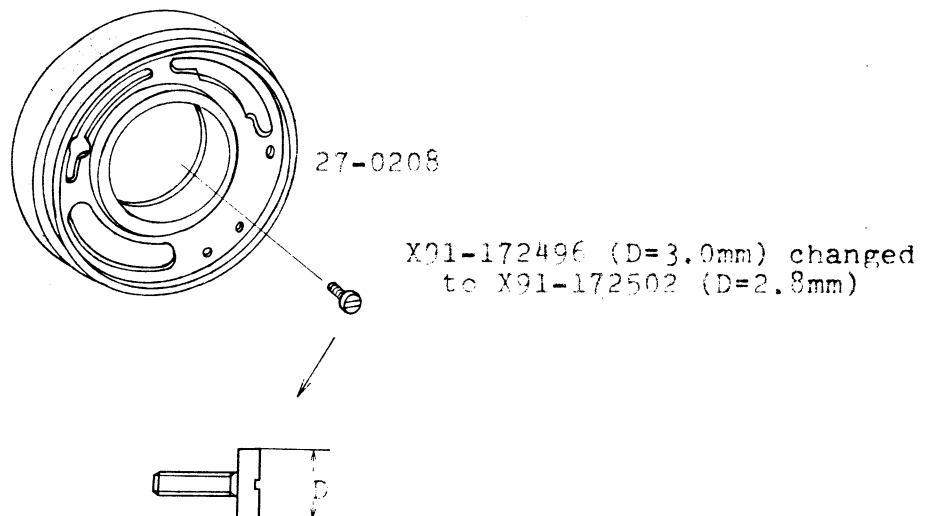

2-2 Repair

If the lens touches the screws, change the screws. Only new screws will be stocked.

Canon SERVICE MANUAL REPORT

Serial No.AC 33-002 E

Service Manual No. C-033


Issued by Camera Service Department, Canon Inc.

Date 1971 / 5 / 7

NEW CANONET 28 Parts and Part Number Changes

Make the following changes to the Repair Manual .pg.3.

1. Coil Spring(97-5863) should be added as shown.
2. Change Focusing Ring part number from 27-0208 to 19-1005.

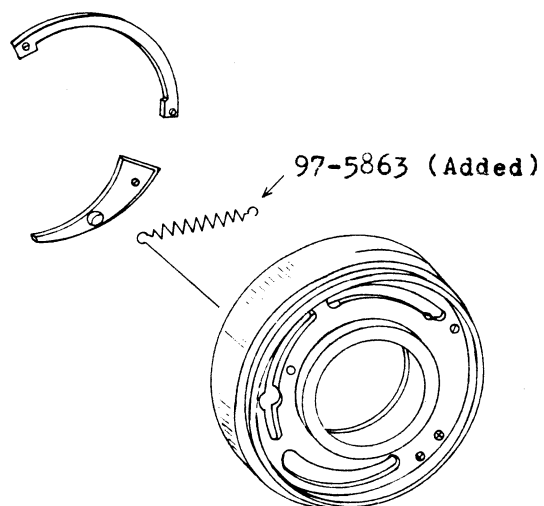


27-0208 changed
to 19-1005

Canon NEW CANONET 28 Release Lever Change

1. Change

When the aperture ring was set to F 11 the Shutter Unit(X71-1164) Release Lever touched Aperture Ring(14-2821), therefore the straight part of the lever has been lengthened as shown.

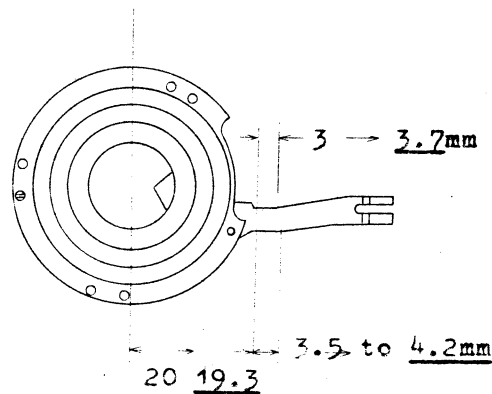

2. Repair

Old and new shutter units are interchangeable. Camera Service will stock only new shutter units.

Canon SERVICE MANUAL REPORT

Serial No. AC 33-005 E

Service Manual No. C-033

Issued by Camera Service Department, Canon Inc.


Date 1971 / 6 / 30

Canon NEW CANONET 28 Parts Change

1. Friction Gear

1.1 Change

Spring(97-6847), which prevents excess play in the take up spool, occasionally slips off Friction Gear(97-0794). The friction gear has been changed to prevent this problem.

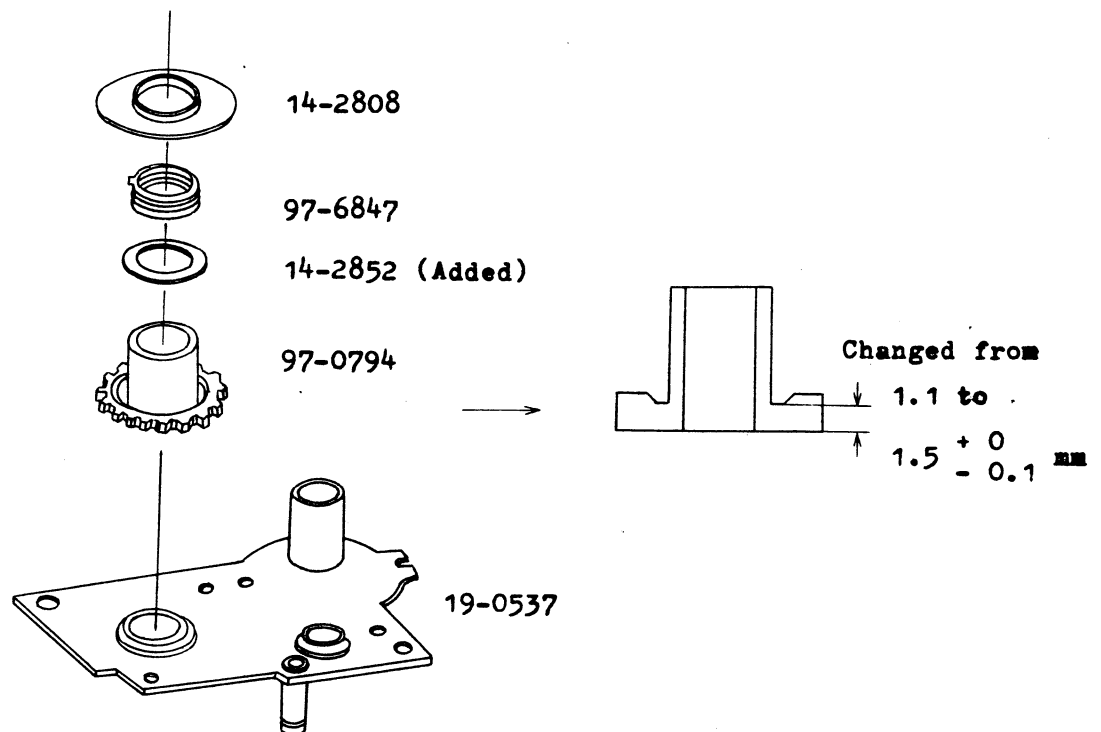

Added Parts:

14-2852 D Washer

Note: Light Shield(14-2808)(D), Spring(97-6847)(D) and Friction Gear (97-0794)(D) are missing from the original Repair Manual. They should be added to page 4.


1.2 Repair

Old and new parts are interchangeable. Camera Service will stock only new parts. To repair cameras with the old gear(cameras without Washer(14-2852)), install 4 Washers(14-2852) or replace the gear and use only one washer.

2. Aperture Ring and Shutter Change


2.1 Change

1. To make the Aperture Ring(14-2821) easier to operate, the grip has been changed.

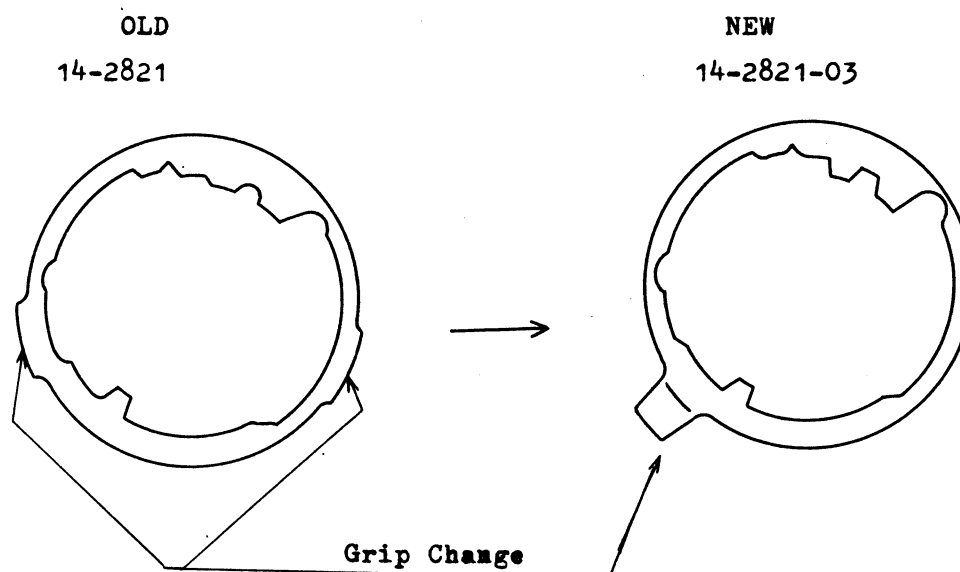


2. To make the Auto (A) click stop more positive, the detent has been deepened 0.6mm.

3. When the aperture ring is set to F 11 the Shutter Charge Gear (X71-1164) sometimes catches under the Aperture Ring(14-2821). As a temporary measure, a small part of the aperture was cut as shown. As the permanent cure, the underside of the aperture ring was relieved to prevent interference.

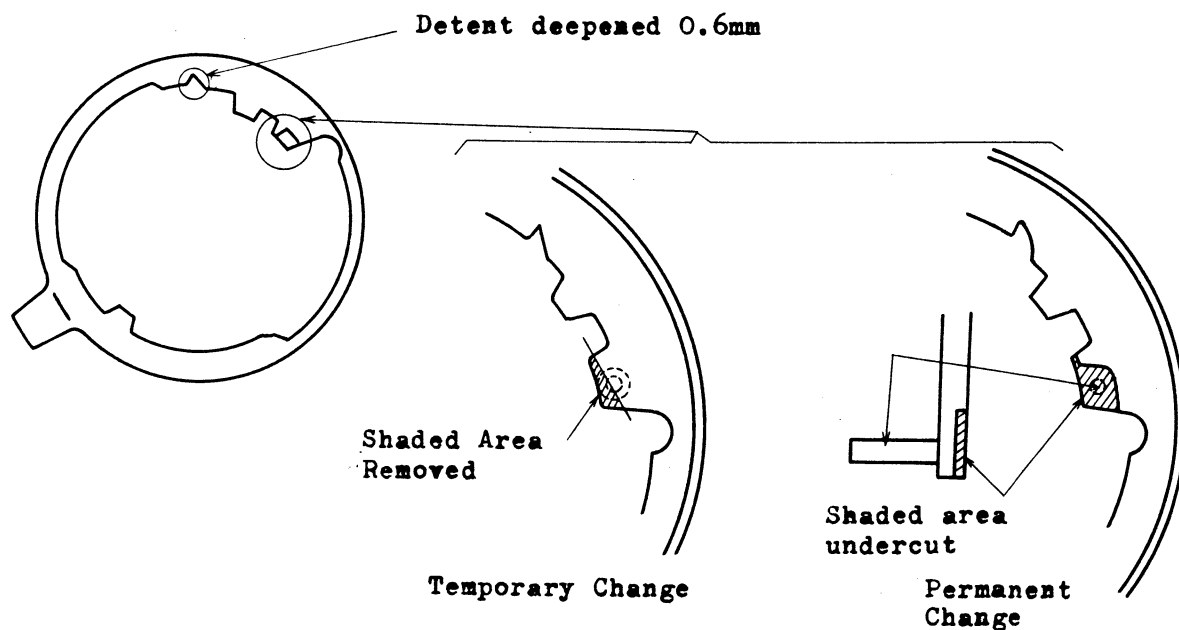

4. When the Shutter Charge Ring pushed Shutter Release Lever(X71-1164) the lever sometimes bent slightly and the charge ring slipped over it. As a temporary measure, the lever was bent up slightly, and as the permanent cure, it is now made from thicker material.

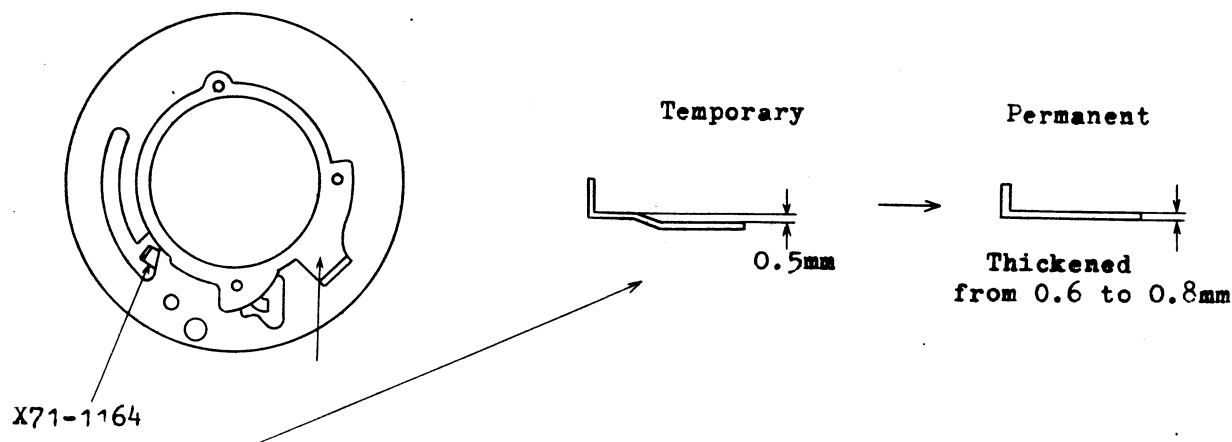

2.2 Repair


The new aperture ring cannot be used with shutters with the old shutter release lever, but either type aperture ring can be used with new shutters.

Camera Service will stock the new shutters only, but will stock both the new and the modified old type aperture ring.

3. Strap Ring Change

3.1 Change

To prevent wear of the strap lugs and make the strap rings easier to install, their shape has been changed.

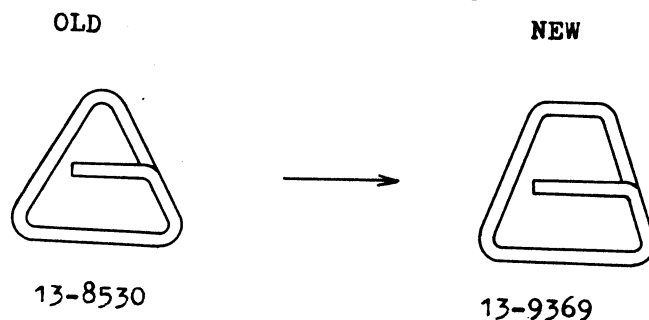

Added Parts:

13-9369 C Strap Ring

3.2 Repair

If the strap lugs are changed, change the strap rings also.

Canon SERVICE MANUAL REPORT

Serial No. AC33-006 E

Service Manual No. C-033

Issued by Camera Service Department, Canon Inc.

Date 1971 / 7 / 26


Canon NEW CANONET 28 Parts Consolidation

1. Change


Counter Window (13-9280) and Counter Window Frame (13-9330) were originally separate parts but now they are molded as a single part [Counter Window (13-9280)].

OLD



NEW



13-9330 deleted



13-9280 changed



13-9280


2. Repair

New and old parts are interchangeable. Camera Service will stock only the new single part which replaces both old parts.

2. Shutter Release Lever Change

2.1 Change

The shutter release lever of the Shutter Unit(X71-1164) sometimes touches Shutter Release Lever(19-0562) during charge. To prevent this problem, the shutter unit lever has been shortened as shown.

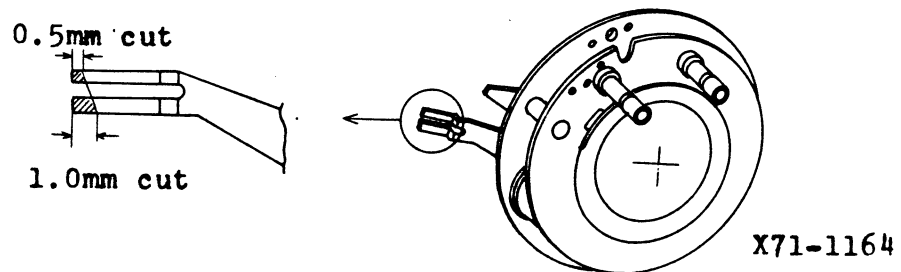

2.2 Repair


Old and new shutter units are interchangeable. Camera Service will stock new units only.

If the shutter jams due to this reason, either install a new shutter unit or cut the old unit's release lever to the above shape.

Canon NEW CANONET 28 Rangefinder Mirror Improvement

1. Change

To decrease the pressure on Adjustment Screw(13-9176) so that it does not loosen and change the ∞ adjustment, the mounting position has been lowered which makes the pivot point farther from the screw and thus lowers the pressure on the screw. The part number for the Finder Box is changed to 19-0533 which is also used on the New Canonet QL 17, QL 19, and Canodate E.

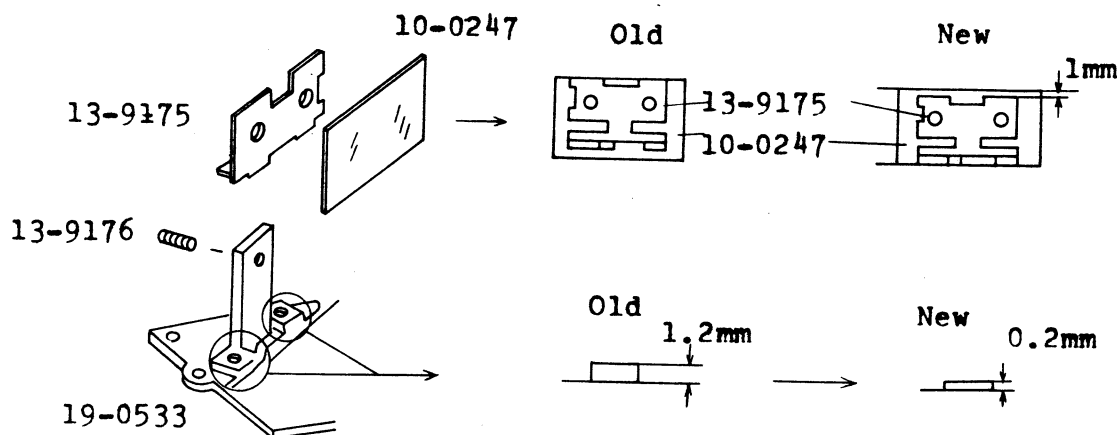

2. Repair

Old and new parts are interchangeable. Camera Service will stock new parts only.

When gluing the mirror to the Mirror Base(13-9175), position the top of the mirror base one millimeter below the top of the mirror.

CANON REPAIR MANUAL

CANON CANONET G-III 17
(REF. NO. 1-30807)


BLACK

CANON CANONET G-III 17
(REF. NO. 1-30808)

CANON INC. JAPAN

CONTENTS	Page
TOP COVER 上 部 カ バ ー	1
BASE COVER 下 部 カ バ ー	1
SHUTTER シャ ッ タ ー	2, 4, 5
LENS UNIT レンズユニット	2
METER UNIT メ ー タ ー ユ ニ ッ ト	2
FRONT PANEL 前 板	3
FOCUSING RING 距 離 環	3
VIEW FINDER 距 離 計	6
BACK COVER 裏 ぶ た	6
CHECKER LAMP チ ェ ッ カ ー ラ ン プ	7
WINDING MECHANISM 巻 き 上 げ 機 構	7
WINDING SHAFT 巻 き 上 げ 軸	8
BODY 本 体	8
FILM COUNTER フ ィ ル ム カ ウ ン タ ー	9
TAKE UP SPOOL 巻 き 取 リ ス プ ー ル	9
WIRING DIAGRAM 配 線 図	10
INDEX OF PARTS NUMBERS 索 引	

EXPLODED VIEW
of
CANON CANONET G-III 17
CANON BLACK CANONET G-III 17

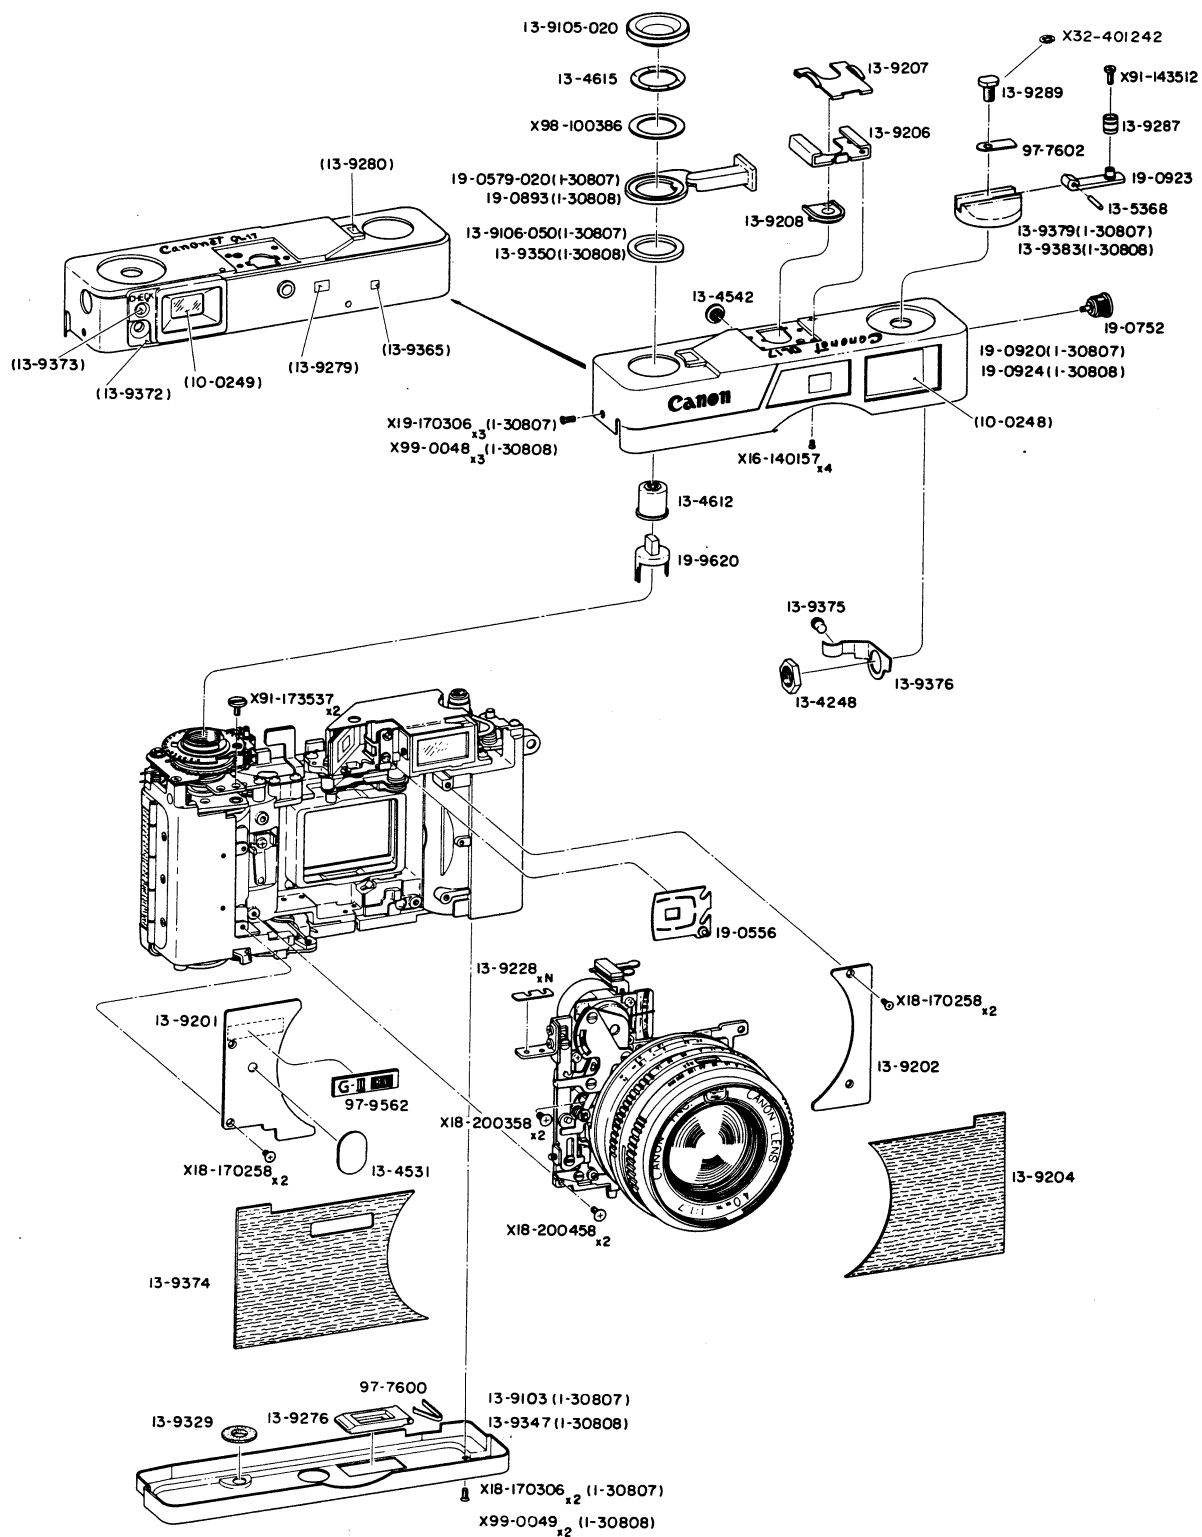


TOP COVER & BASE COVER

上部カバー

下部カバー

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
前 面 ガ ラ ス	B	10-0248	1	Front Glass
接 眼 レ ン ズ	B	10-0249	1	Eyepiece Lens
ナ ッ ト	E	13-4248	1	Nut
キ ャ ッ プ	C	13-4531	1	Cap
キ ャ ッ プ	D	13-4542	1	Cap
シ ャ ッ タ ー 釦	D	13-4612	1	Shutter Button
ワ ッ シ ャ ー	D	13-4615	1	Washer
ク ラ ン ク ピ ン	C	13-5368	1	Pin
下 部 カ バ ー	C	13-9103	1	Base Cover
釦 リ ン グ	C	13-9105-020	1	Shutter Button Guard
ワ ッ シ ャ ー	D	13-9106-050	1	Washer
前 カ バ ー	C	13-9201	1	Front Cover
前 カ バ ー	C	13-9202	1	Front Cover
レ ザ ー	B	13-9204	1	Leather
ア ク セ サ リ ー シ ュ ー	B	13-9206	1	Accessory Shoe
ア ク セ サ リ ー シ ュ ー カ バ ー	B	13-9207	1	Accessory Shoe Cover
直 結 シ ン ク ロ タ ー ミ ナ ル	C	13-9208	1	Connect Flash Terminal
調 整 ワ ッ シ ャ ー	A	13-9228(0.20)	N	Adjusting Washer
()内の数字は厚さを示す。 (単位mm)		13-9228(0.30)		Parenthesized numbers indicate thickness. (Unit: mm)
水 銀 電 池 室 ふ た	C	13-9276	1	Battery Cover
フ ィ ル ム 送 り 指 標 窓	C	13-9279	1	Film Feed Index Window
カ ウ ン タ ー 窓	C	13-9280	1	Counter Window
ク ラ ン ク 座	C	13-9287	1	Rewind Crank Head
ク ラ ン ク ビ ス	C	13-9289	1	Screw
モ ル ト ブ レ ー ン	C	13-9329	1	Light Shield
下 部 カ バ ー	C	13-9347	1	Base Cover
ワ ッ シ ャ ー	D	13-9350	1	Washer
シャッターチャージ指標窓	C	13-9365	1	Shutter Charge Index Window
接 眼 レ ン ズ 枠	C	13-9372	1	Eyepiece Frame
ラ ン プ 窓	C	13-9373	1	Lamp Window
レ ザ ー	B	13-9374	1	Leather
チ ェ ッ カ ー 釦	D	13-9375	1	Checker Button
チ ェ ッ カ ー 接 片	D	13-9376	1	Checker Contact
巻 き 戻 し ノ ブ	C	13-9379	1	Rewind Knob
巻 き 戻 し ノ ブ	C	13-9383	1	Rewind Knob
フ ァ イ ン ダ ー マ ス ク	C	19-0556	1	Finder Mask
巻 き 上 げ レ バ ー	C	19-0579-020	1	Winding Lever
シ ン ク ロ タ ー ミ ナ ル	D	19-0752	1	Flash Terminal
巻 き 上 げ レ バ ー	C	19-0893	1	Winding Lever
上 部 カ バ ー	C	19-0920	1	Top Cover
巻 き 戻 し ク ラ ン ク	D	19-0923	1	Rewind Crank
上 部 カ バ ー	C	19-0924	1	Top Cover
シ ャ ッ タ ー 釦 座	D	19-9620	1	Shutter Button Base
板 ス プ リ ン グ	D	97-7600	1	Plate Spring
板 ス プ リ ン グ	D	97-7602	1	Plate Spring
Q L マ ー ク	D	97-9562	1	QL Mark
十 字 ナ ベ ビ ス		X16-140157	4	Screw
十 字 皿 ビ ス		X16-200458	2	Screw
十 字 皿 ビ ス		X18-170258	4	Screw
十 字 皿 ビ ス		X18-170306	2	Screw
十 字 皿 ビ ス		X18-200358	2	Screw
十 字 丸 皿 ビ ス		X19-170306	3	Screw
緊 定 ワ ッ シ ャ ー		X32-401242	1	Retaining Washer
平 ビ ス		X91-143512	1	Screw
平 ビ ス		X91-173537	2	Screw
ワ ッ シ ャ ー		X98-100386	1	Washer
十 字 丸 皿 ビ ス		X99-0048	3	Screw
十 字 皿 ビ ス		X99-0049	2	Screw

EXPLODED VIEW
of
CANON CANONET G-III 17
CANON BLACK CANONET G-III 17

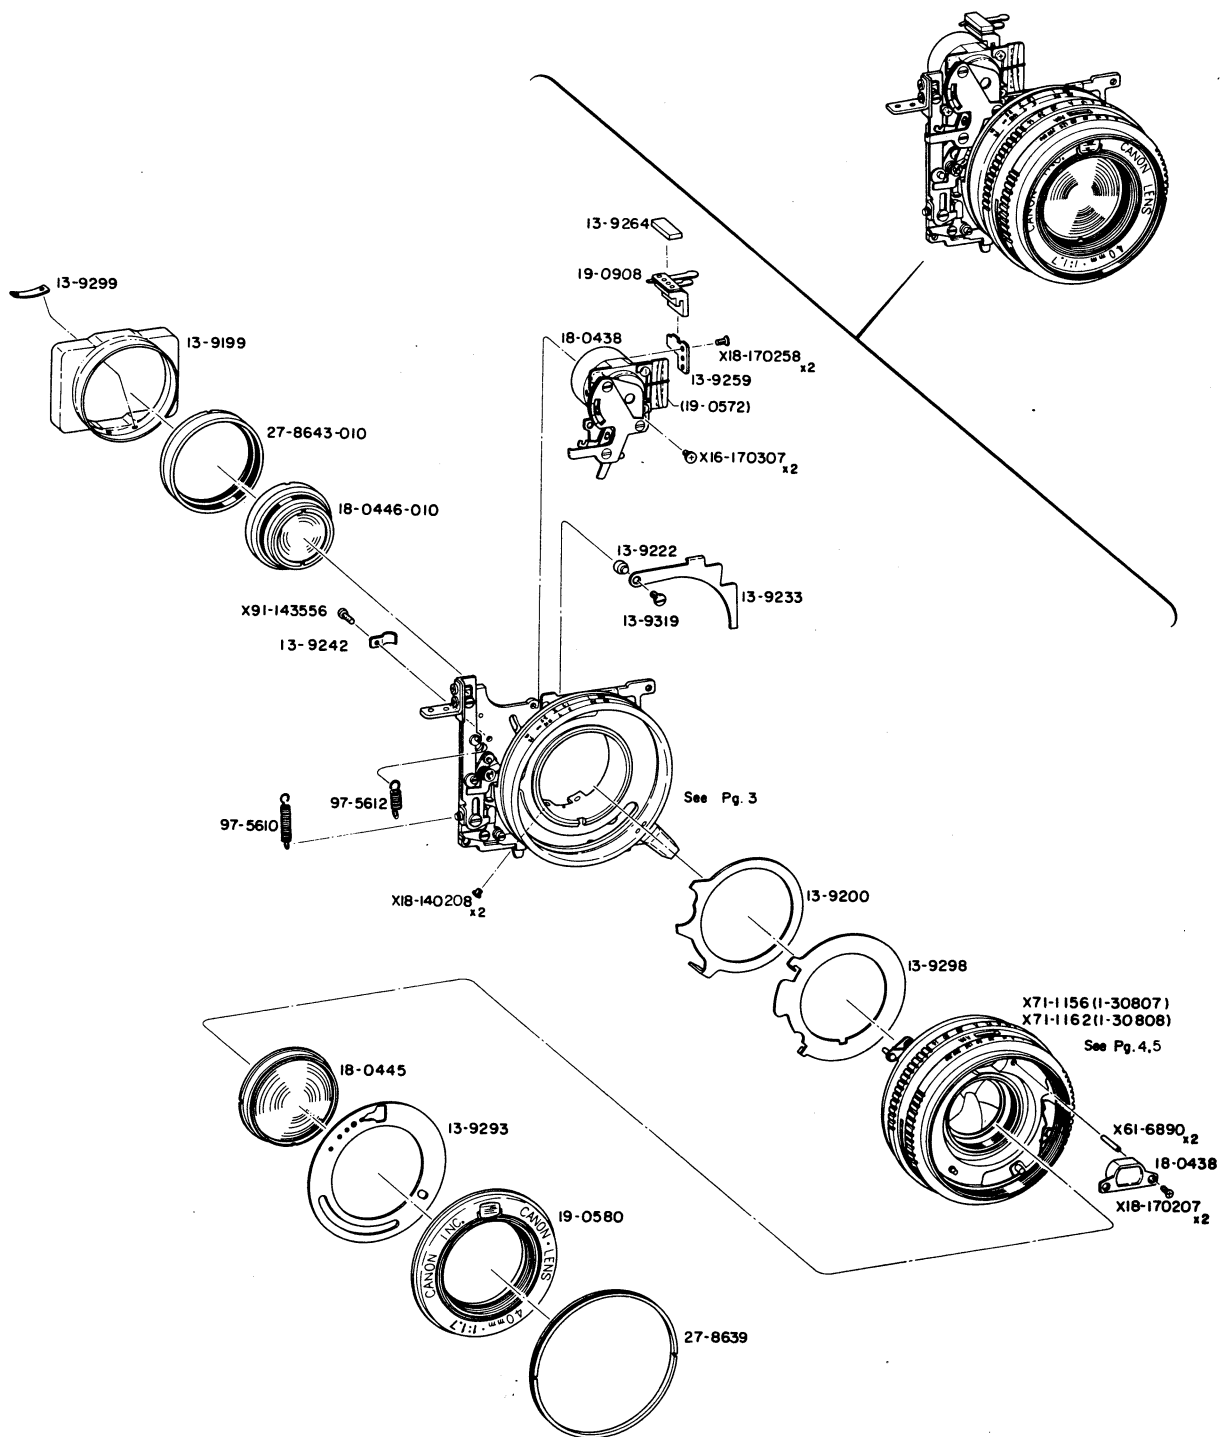


PARTS LIST

SHUTTER, LENS UNIT & METER UNIT

シャッター レンズユニット メーターユニット

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
遮 光 筒	D	13-9199	1	Light Shield
チャージリング	C	13-9200	1	Charge Ring
カラ	D	13-9222	1	Collar
パララックス調整レバー	E	13-9233	1	Parallax Adjusting Lever
コード押え	D	13-9242	1	Cord Holder
接片支持板	D	13-9259	1	Contact Support
モルトブレン	C	13-9264	1	Contact Holder
絞リ板	D	13-9293	1	Diaphragm Plate
チャージリング座	C	13-9298	1	Intermediate Ring
ナット	C	13-9299	1	Nut
ビス	C	13-9319	1	Screw
メーターユニット	C	18-0438	1	Exposure Meter Unit
前玉ユニット	C	18-0445	1	Front Lens Unit
後玉ユニット	C	18-0446-010	1	Rear Lens Unit
絞り目盛板	D	19-0572	1	Aperture Scale Plate
ネーム	C	19-0580	1	Name Ring
接片	D	19-0908	1	Contact
押え	D	27-8639	1	Assembly Collar
押え	D	27-8643-010	1	Assembly Collar
コイルスプリング	D	97-5610	1	Coil Spring
コイルスプリング	D	97-5612	1	Coil Spring
十字ナベビス		X16-170307	2	Screw
十字皿ビス		X18-140208	2	Screw
十字皿ビス		X18-170207	2	Screw
十字皿ビス		X18-170258	2	Screw
ビニールチューブ	E	X61-6890	2	Vynil Tube
シャッター	C	X71-1156	1	Shutter
シャッター	C	X71-1162	1	Shutter
平ビス		X91-143556	1	Screw

EXPLODED VIEW
of
CANON CANONET G-III 17
CANON BLACK CANONET G-III 17

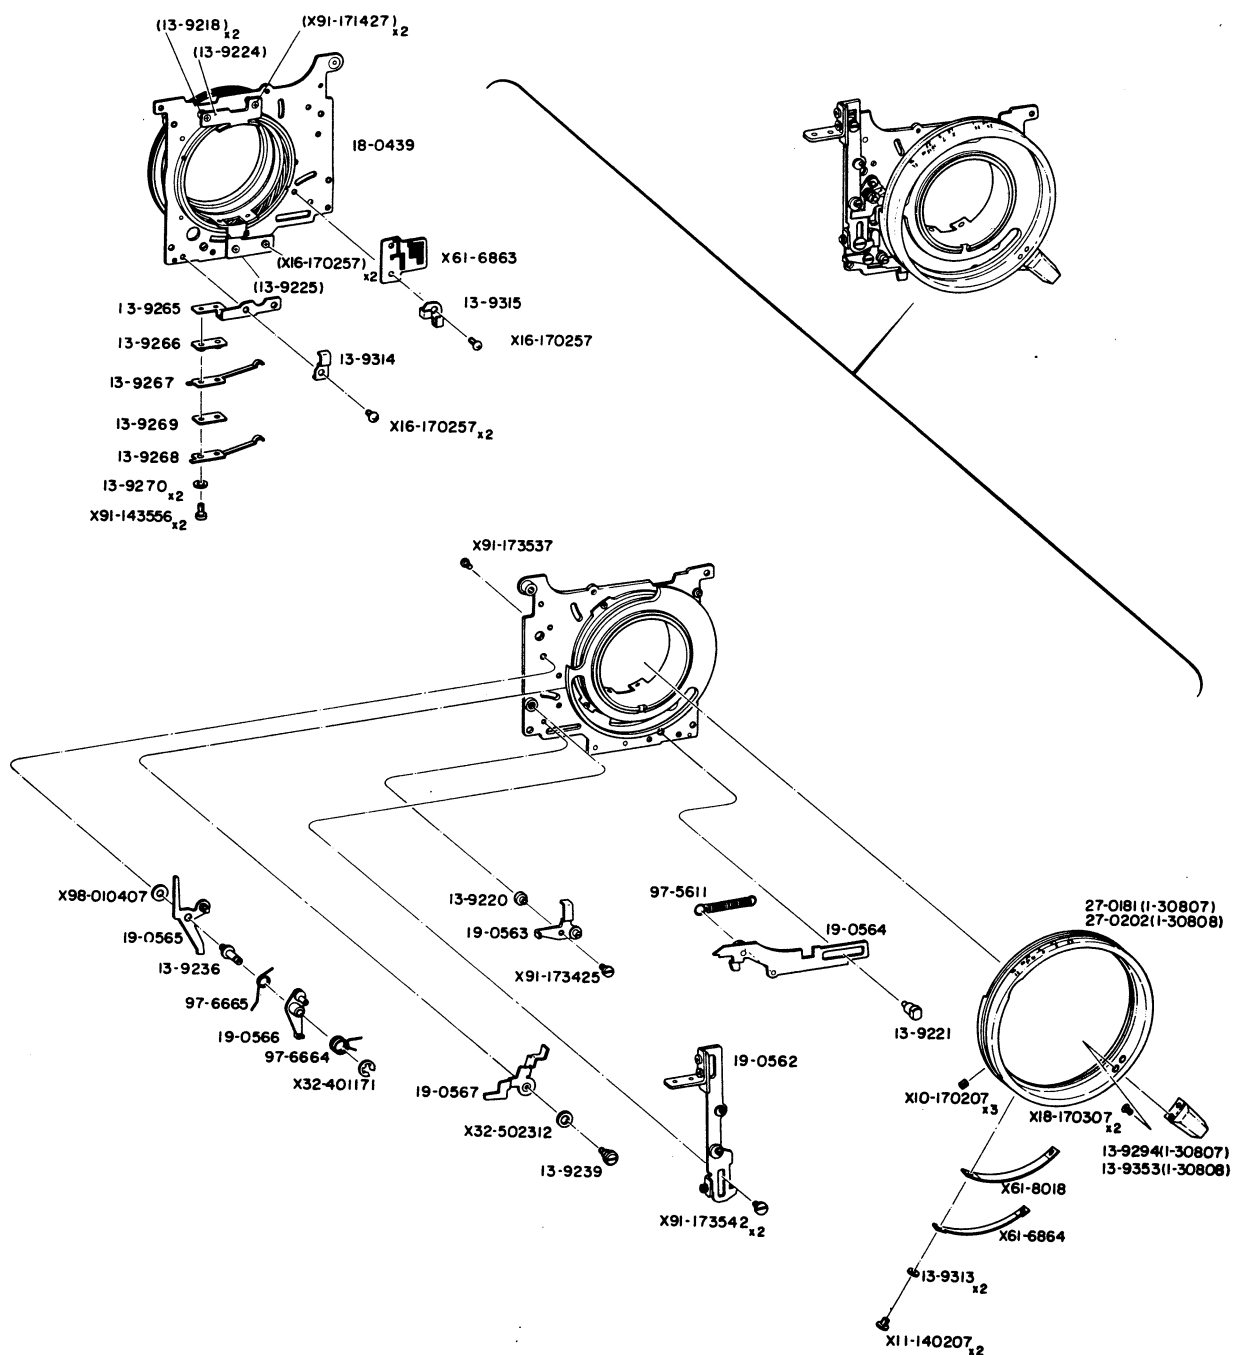


FRONT PANEL & FOCUSING RING

前 板

距 離 環

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
カ ラ -	D	13-9218	2	Collar
カ ラ -	D	13-9220	1	Collar
ナ ッ ト	D	13-9221	1	Nut
直 進 キ -	C	13-9224	1	Key
直 進 キ -	C	13-9225	1	Key
ロ ッ ク レ バ ー 軸	D	13-9236	1	Shaft
レ リ ー ズ レ バ ー 軸	D	13-9239	1	Shaft
接 片 ホ ル ダ -	E	13-9265	1	Contact Holder
接 片 地 板	D	13-9266	1	Contact Base
接 片	D	13-9267	1	Contact
接 片	D	13-9268	1	Contact
絶 縁 板	D	13-9269	1	Insulator
絶 縁 板	D	13-9270	2	Insulator
距 離 つ ま み	E	13-9294	1	Focusing Knob
ワ ッ シ ャ -	C	13-9313	2	Washer
コ ー ド 押 え	D	13-9314	1	Cord Holder
コ ー ド 押 え	D	13-9315	1	Cord Holder
距 離 つ ま み	E	13-9353	1	Focusing Knob
前 板 ユ ニ ッ ト	D	18-0439	1	Front Panel Unit
シャッターレリーズレバー	D	19-0562	1	Shutter Release Lever
巻 き 止 め 外 し	D	19-0563	1	Stopper Remove Lever
シャッターチャージレバー	D	19-0564	1	Shutter Charge Lever
巻 き 止 め 外 し	D	19-0565	1	Stopper Remove Lever
シャッターロックレバー	D	19-0566	1	Shutter Lock Lever
シャッターレリーズレバー	D	19-0567	1	Shutter Release Lever
距 離 環	E	27-0181	1	Focusing Ring
コイルスプリング	E	27-0202	1	Focusing Ring
ス プ リ ン グ	D	97-5611	1	Coil Spring
ス プ リ ン グ	D	97-6664	1	Spring
ス プ リ ン グ	D	97-6665	1	Spring
止 め ビ ス		X10-170207	3	Screw
平 ビ ス		X11-140207	2	Screw
十 字 ナ ベ ビ ス		X16-170257	5	Screw
十 字 皿 ビ ス		X18-170307	2	Screw
緊 定 ワ ッ シ ャ -		X32-401171	1	Retaining Washer
ワ ッ シ ャ -		X32-502312	1	Washer
プ リ ン ト 板		X61-6863	1	Print Circuit Plate
プ リ ン ト 板		X61-6864	1	Print Circuit Plate
カ ー ホ ン 抵 抗		X61-8018	1	Resistor
平 ビ ス		X91-143556	2	Screw
平 ビ ス		X91-171427	2	Screw
平 ビ ス		X91-173425	1	Screw
平 ビ ス		X91-173537	1	Screw
平 ビ ス		X91-173542	2	Screw
ワ ッ シ ャ -		X98-010407	1	Washer

EXPLODED VIEW
of
CANON CANONET G-III 17
CANON BLACK CANONET G-III 17

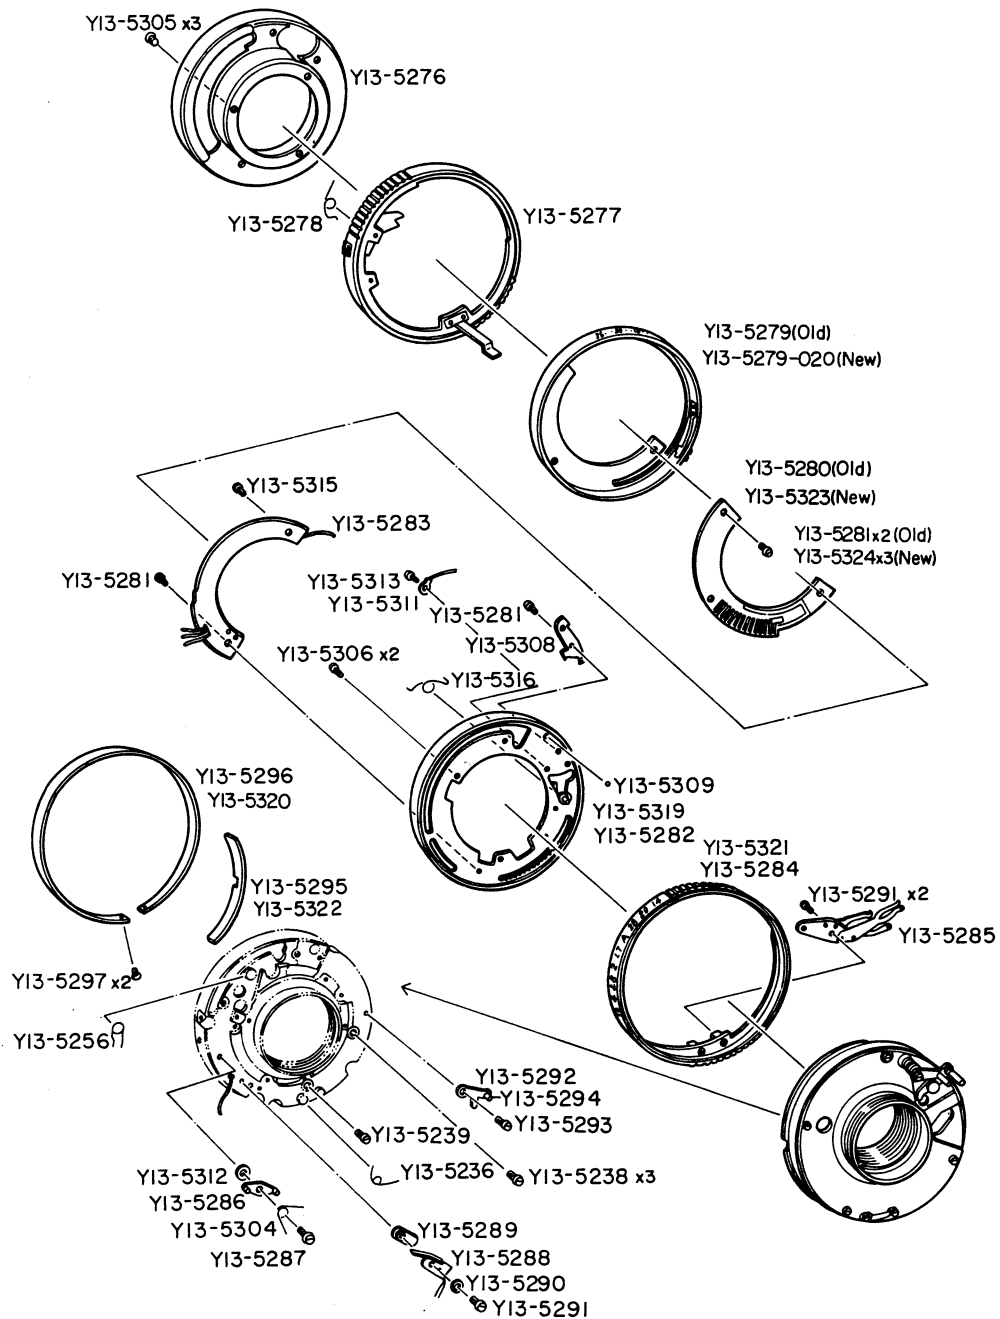


SHUTTER

シャッター

部 品 名 称				CLASS	PARTS NO.	QTY.	DESCRIPTION	
ス	ブ	リ	ン	グ	E	Y13-5236	1	Spring
ビ				ス	E	Y13-5238	3	Screw
ビ				ス	E	Y13-5239	1	Screw
ス	ブ	リ	ン	グ	E	Y13-5256	1	Spring
前	リ	ン	グ	D	Y13-5276	1	Hood Ring	
シャッタースピード環				E	Y13-5277	1	Shutter Speed Ring	
ス	ブ	リ	ン	グ	E	Y13-5278	1	Spring
A	S	A	環	E	Y13-5279	1	Film Speed Ring	
A	S	A	環	E	Y13-5279-020	1	Film Speed Ring	
抵	抗	基	板	D	Y13-5280	1	Resistor Plate	
ビ			ス	E	Y13-5281	4	Screw	
指		標	環	E	Y13-5282	1	Marking Ring	
ブ	リ	ン	ト	板	E	Y13-5283	1	Print Circuit Plate
絞		リ	環	E	Y13-5284	1	Aperture Scale Ring	
接	片	ユ	ニ	ット	E	Y13-5285	1	Contact Assembly
スイッチレバー				E	Y13-5286	1	Switch Lever	
ビ			ス	E	Y13-5287	1	Screw	
接			片	E	Y13-5288	1	Contact	
絶		縁	板	E	Y13-5289	1	Insulator	
絶		縁	板	E	Y13-5290	1	Insulator	
ビ			ス	E	Y13-5291	3	Screw	
マニュアルレバー				E	Y13-5292	1	Manual Lever	
ビ			ス	E	Y13-5293	1	Screw	
調		整	ビ	ス	E	Y13-5294	1	Adjusting Screw
ダストカバー				E	Y13-5295	1	Dust Cover	
ネームプレート				E	Y13-5296	1	Name Plate	
ビ			ス	B	Y13-5297	2	Screw	
ス	ブ	リ	ン	グ	E	Y13-5304	1	Spring
ビ			ス	E	Y13-5305	3	Screw	
ビ			ス	E	Y13-5306	2	Screw	
板スプリング				E	Y13-5308	1	Plate Spring	
スチールボール				D	Y13-5309	1	Steel Ball	
リ		ード	線	E	Y13-5311	1	Lead	
ワ	ッ	シ	ャ	ース	E	Y13-5312	1	Washer
ビ			ス	E	Y13-5313	1	Screw	
ビ			ス	E	Y13-5315	1	Screw	
ス	ブ	リ	ン	グ	E	Y13-5316	1	Spring
指		標	環	D	Y13-5319	1	Marking Ring (1-30808)	
ネ	ーム	プレート	ト	C	Y13-5320	1	Name Plate (1-30808)	
絞	リ	目	盛	環	C	Y13-5321	1	Aperture Scale Ring (1-30808)
ダストカバー				D	Y13-5322	1	Dust Cover (1-30808)	
抵	抗	基	板	D	Y13-5323	1	Resistor Plate	
ビ			ス	E	Y13-5324	3	Screw	

EXPLODED VIEW
of
CANON CANONET G-III 17
CANON BLACK CANONET G-III 17

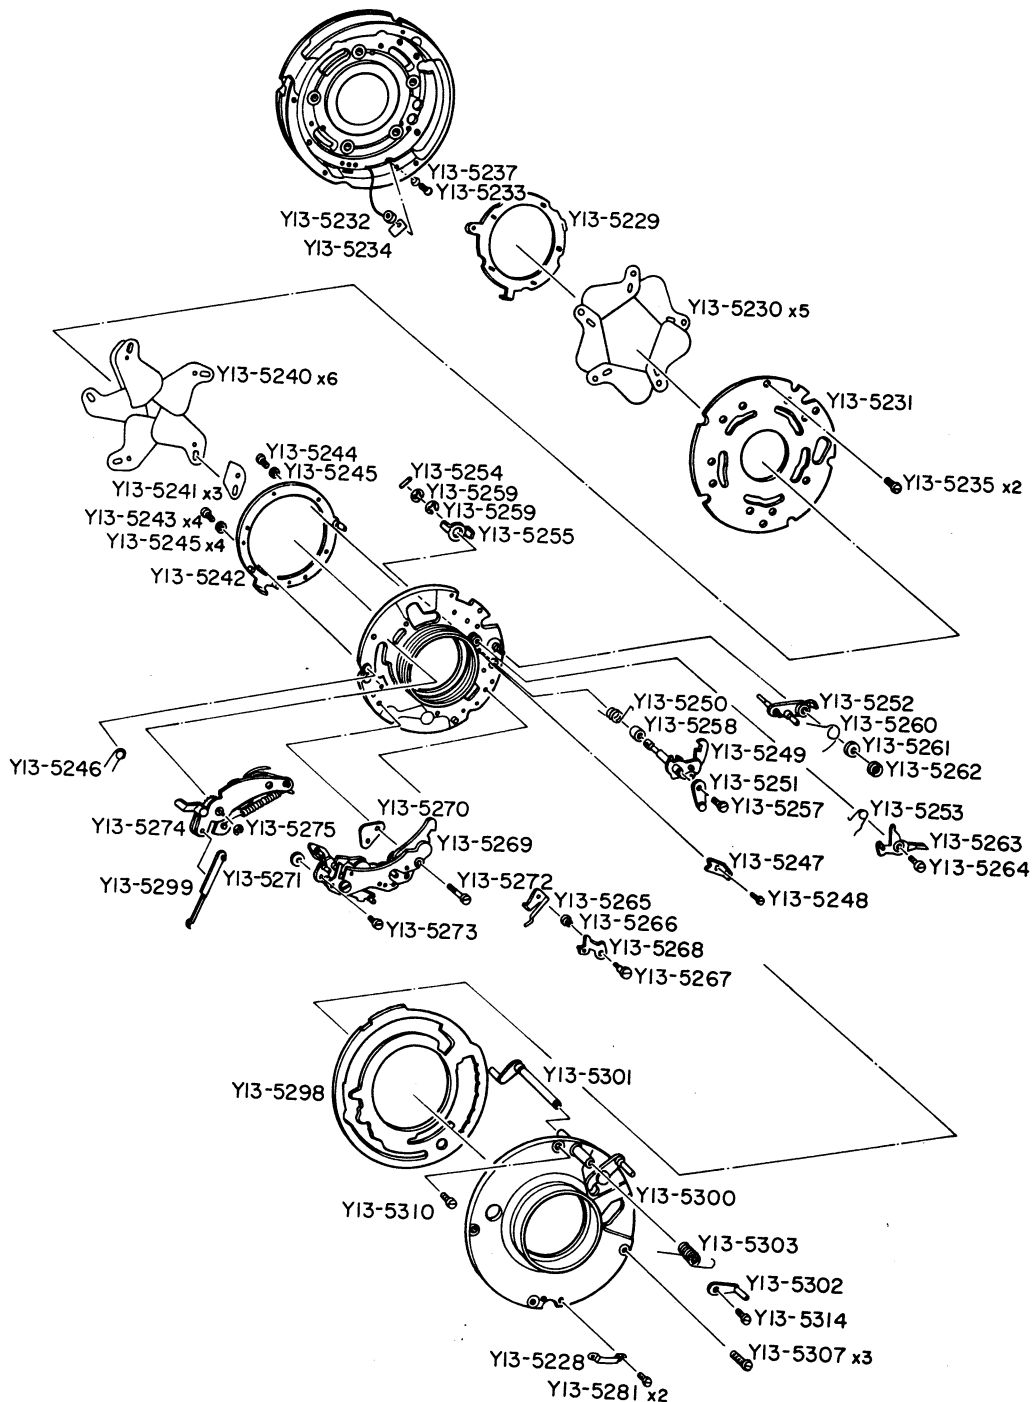


SHUTTER

シャッター

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
リード線押え	E	Y13-5228	1	Lead Holder
絞りコントロール環	E	Y13-5229	1	Diaphragm Control Ring
絞り羽根	D	Y13-5230	5	Diaphragm Blade
中間板	E	Y13-5231	1	Blade Retaining Panel
シンクロリード線	E	Y13-5232	1	Flash Lead Wire
ビス	E	Y13-5233	1	Screw
絶縁テープ	E	Y13-5234	1	Insulator Tape
ビス	E	Y13-5235	2	Screw
絶縁板	E	Y13-5237	1	Insulator
シャッター羽根	D	Y13-5240	6	Shutter Blade
シャッター補助羽根	D	Y13-5241	3	Sub Shutter Blade
シャッター羽根押え	E	Y13-5242	1	Blade Holder
ビス	E	Y13-5243	4	Screw
ビス	E	Y13-5244	1	Screw
ワッシャー	E	Y13-5245	5	Washer
スプリング	E	Y13-5246	1	Spring
テンションストッパー	E	Y13-5247	1	Tension Stopper
ビス	E	Y13-5248	1	Screw
コッキングレバー	E	Y13-5249	1	Main Cocking Lever
スプリング	E	Y13-5250	1	Spring
コッキングレバー	E	Y13-5251	1	Cocking Lever
リリースレバー	E	Y13-5252	1	Release Lever
スプリング	E	Y13-5253	1	Spring
ピン	E	Y13-5254	1	Pin
絞り固定レバー	E	Y13-5255	1	Aperture Set Lever
ビス	E	Y13-5257	1	Screw
カラ	E	Y13-5258	1	Collar
緊定ワッシャー	E	Y13-5259	2	Retaining Washer
スプリング	E	Y13-5260	1	Spring
ワッシャー	E	Y13-5261	1	Washer
ナット	E	Y13-5262	1	Nut
バルブロックレバー	E	Y13-6263	1	B Lock Lever
ビス	E	Y13-5264	1	Screw
X 接片	E	Y13-5265	1	X Contact
絶縁板	E	Y13-5266	1	Insulator
ビス	E	Y13-5267	1	Screw
X 接片	E	Y13-5268	1	X Contact
スローガバナ	D	Y13-5269	1	Slow Governor Unit
ワッシャー	E	Y13-5270	1	Washer
ワッシャー	E	Y13-5271	1	Washer
ビス	E	Y13-5272	1	Screw
ビス	E	Y13-5273	1	Screw
セルフタイマー	D	Y13-5274	1	Self Timer Unit
緊定ワッシャー	E	Y13-5275	1	Retaining Washer
ビス	E	Y13-5281	2	Screw
中間板	E	Y13-5298	1	Inner Panel
クリックスプリング	E	Y13-5299	1	Click Spring
後板	E	Y13-5300	1	Rear Panel
EE 軸	E	Y13-5301	1	EE Shaft
EE レバー	E	Y13-5302	1	EE Lever
スプリング	E	Y13-5303	1	Spring
ビス	E	Y13-5307	3	Screw
ビス	E	Y13-5310	1	Screw
ビス	E	Y13-5314	1	Screw

EXPLODED VIEW
of
CANON CANONET G-III 17
CANON BLACK CANONET G-III 17

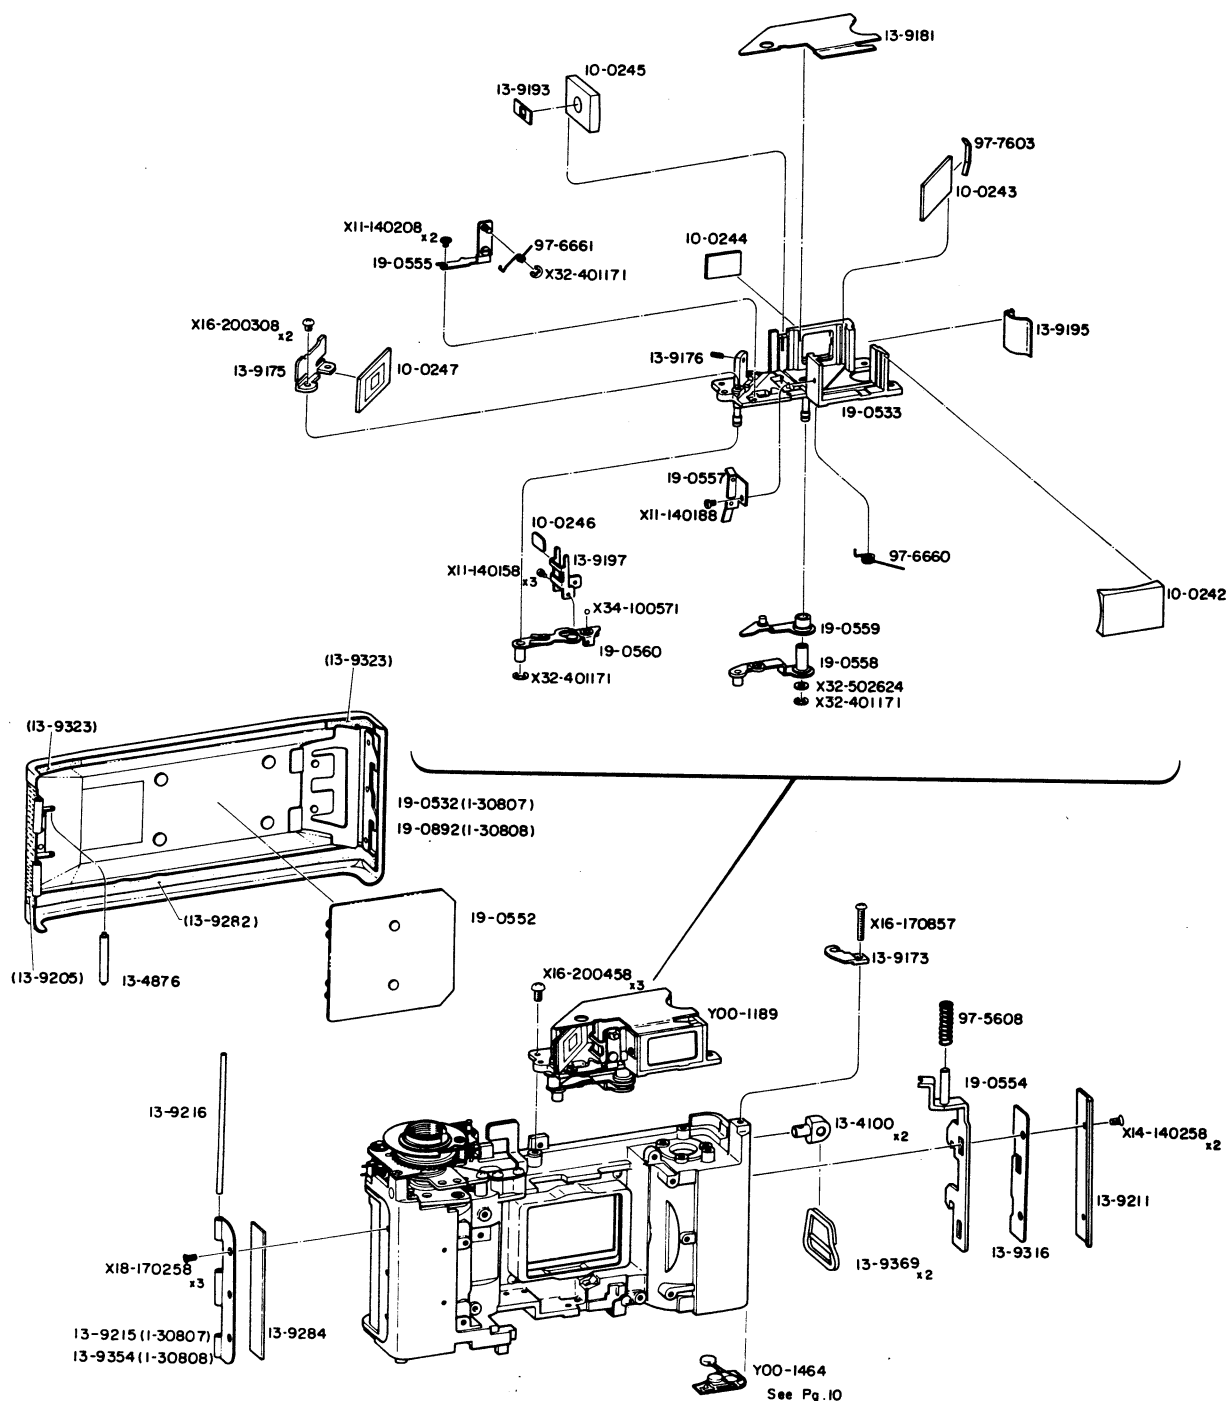


VIEW FINDER & BACK COVER

距離計

裏ぶた

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ファインダーユニット	D	Y00-1189	1	View Finder Unit
チェッカープリント板	D	Y00-1464	1	Checker Circuit Board
レンズ	D	10-0242	1	Lens Element
ハーフミラー	D	10-0243	1	Half Mirror
レンズ	D	10-0244	1	Lens Element
レンズ	D	10-0245	1	Lens Element
レンズ	D	10-0246	1	Lens Element
ミラー	D	10-0247	1	Mirror
耳環	D	13-4100	2	Neck Strap Catch
蝶番軸	D	13-4876	1	Shaft of Hinge
軸受け	D	13-9173	1	Shaft Holder
ミラー地板	E	13-9175	1	Mirror Base
ビス	C	13-9176	1	Screw
ファインダー上カバー	E	13-9181	1	Finder Top Cover
マスク	E	13-9193	1	Mask
ファインダー横カバー	E	13-9195	1	Finder Side Cover
移動レンズ台	E	13-9197	1	Movement Lens Base
レザー	B	13-9205	1	Leather
ロックレバーカバー	C	13-9211	1	Lock Lever Cover
蝶番	D	13-9215	1	Hinge
蝶番軸	D	13-9216	1	Shaft of Hinge
モルトブレン	C	13-9282	1	Light Shield
テレンブ	D	13-9284	1	Light Shield
スベサ	D	13-9316	1	Spacer
モルトブレン	E	13-9323	2	Light Shield
蝶番	D	13-9354	1	Hinge
吊環	C	13-9369	2	Neck Strap Adapter
裏ぶた	D	19-0532	1	Back Cover
ファインダー地板	E	19-0533	1	Finder Box
圧着板	C	19-0552	1	Pressure Plate
ロックレバー	D	19-0554	1	Lock Lever
ファインダーマスクホルダー	D	19-0555	1	Finder Mask Holder
レンズ押え	E	19-0557	1	Lens Pressure
連動レバー	E	19-0558	1	Connecting Lever
連動レバー	E	19-0559	1	Connecting Lever
バネ板	E	19-0560	1	Spring Lever
裏ぶた	D	19-0892	1	Back Cover
コイルスプリング	D	97-5608	1	Coil Spring
スプリング	D	97-6660	1	Spring
スプリング	D	97-6661	1	Spring
板スプリング	D	97-7603	1	Plate Spring
平ビス		X11-140158	3	Screw
平ビス		X11-140188	1	Screw
平ビス		X11-140208	2	Screw
皿ビス		X14-140258	2	Screw
十字ナベビス		X16-170857	1	Screw
十字ナベビス		X16-200308	2	Screw
十字ナベビス		X16-200458	3	Screw
十字皿ビス		X18-170258	3	Screw
緊定ワッシャー		X32-401171	3	Retaining Washer
ワッシャー		X32-502624	1	Washer
スチールボール		X34-100571	1	Steel Ball

EXPLODED VIEW
of
CANON CANONET G-III 17
CANON BLACK CANONET G-III 17

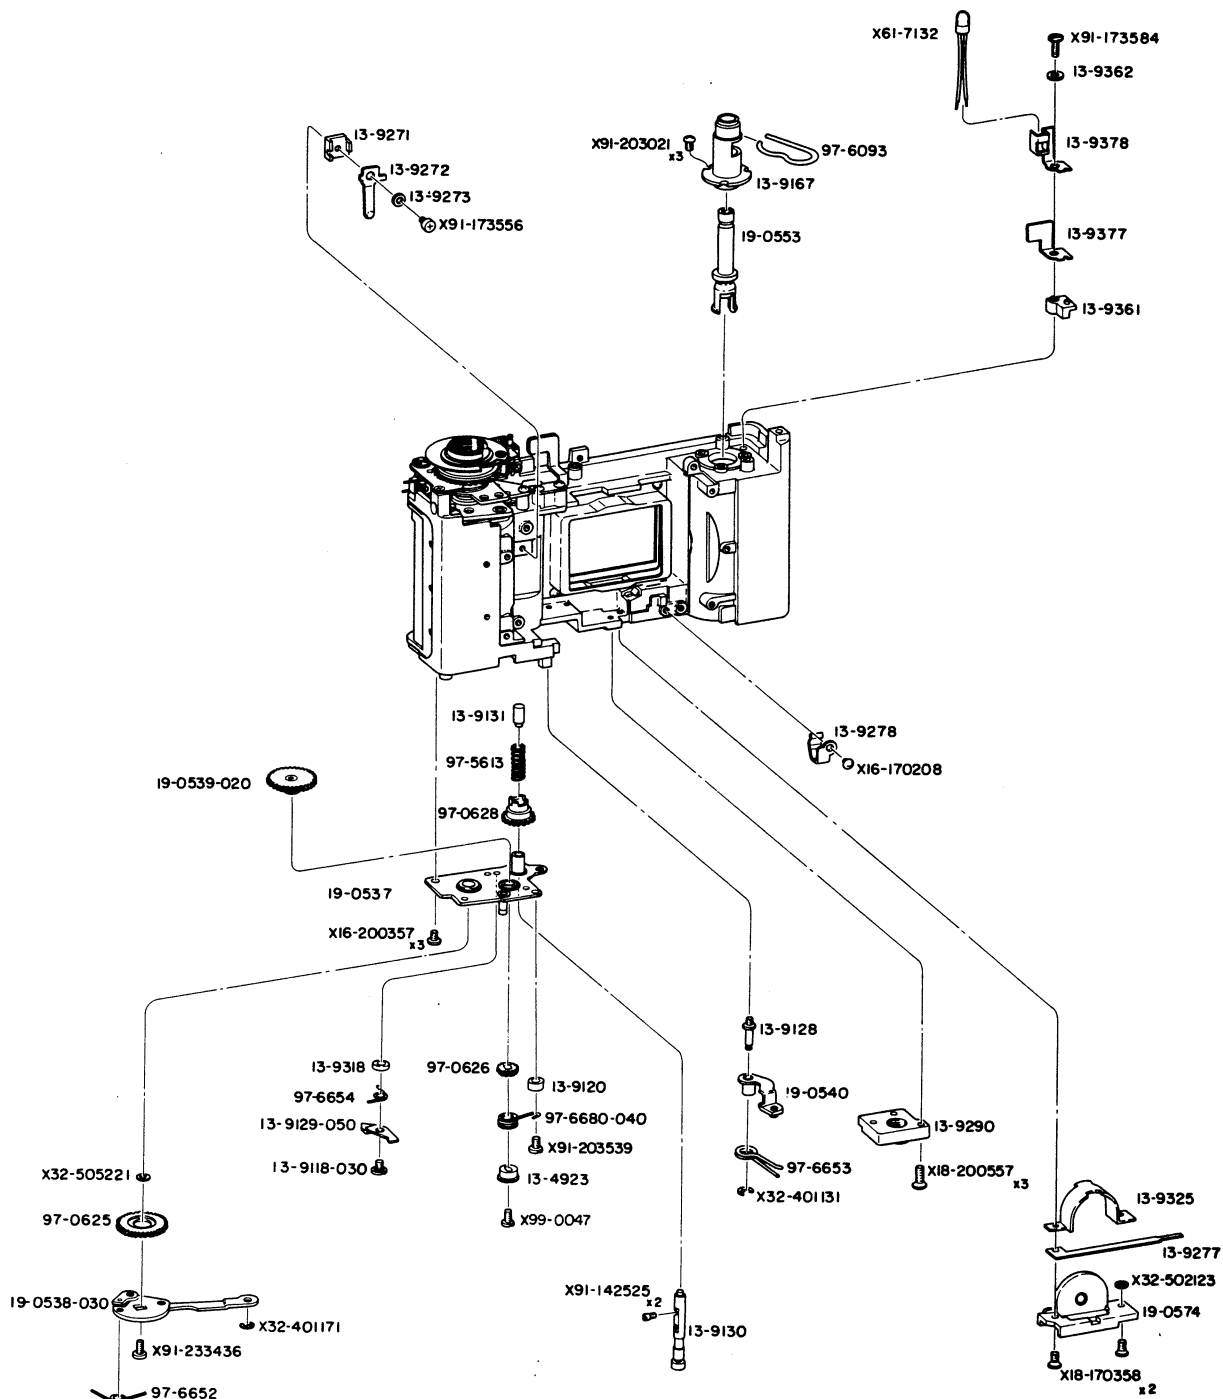

PARTS LIST

CHECKER LAMP & WINDING MECHANISM

チェッカー ランプ 巻き上げ 機構

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
カ ラ ー	D	13-4923	1	Collar
ス タ ッ ド	D	13-9118-030	1	Stud
カ ラ ー	C	13-9120	1	Collar
チャージスプリング軸	D	13-9128	1	Charge Spring Shaft
ラチェットレバー	D	13-9129-050	1	Ratchet Lever
R ボ タ ン	D	13-9130	1	Rewind Button
バ ネ 受 け	E	13-9131	1	Spring Catcher
巻 戻 し メ タ ル	C	13-9167	1	Rewind Metal
接 片 地 板	E	13-9271	1	Contact Base
接 片	D	13-9272	1	Contact
絶 縁 板	D	13-9273	1	Insulator
水 銀 電 池 外 し	C	13-9277	1	Battery Take Out Plate
水 銀 電 池 接 片	D	13-9278	1	Battery Contact
三 脚 取 付 け ネ ジ	D	13-9290	1	Tripod Socket
ワ ッ シ ャ ー	C	13-9318	1	Washer
遮 光 板	D	13-9325	1	Light Shield
接 片 台	D	13-9361	1	Contact Base
絶 縁 ワ ッ シ ャ ー	D	13-9362	1	Washer
チェッカー接片	D	13-9377	1	Checker Contact
ランプホルダー	D	13-9378	1	Lamp Holder
巻 上 げ 地 板	E	19-0537	1	Winding Base
巻 上 げ 爪	D	19-0538-030	1	Winding Pawl
中 間 ギ ャ ー	D	19-0539-020	1	Inner Gear
シャッターチャージレバー	D	19-0540	1	Shutter Charge Lever
巻 戻 し フ ォ ーク	B	19-0553	1	Rewind Fork
水 銀 電 池 室	D	19-0574	1	Battery Box
巻 上 げ ギ ャ ー	D	97-0625	1	Winding Gear
アイドルギヤ	D	97-0626	1	Idle Gear
スプロケットギヤ	D	97-0628	1	Sprocket Gear
コイルスプリング	D	97-5613	1	Coil Spring
ス プ リ ン グ	D	97-6093	1	Spring
ス プ リ ン グ	D	97-6652	1	Spring
ス プ リ ン グ	D	97-6653	1	Spring
ス プ リ ン グ	D	97-6654	1	Spring
ス プ リ ン グ	D	97-6680-040	1	Spring
十 字 ナ ベ ビ ス		X16-170208	1	Screw
十 字 ナ ベ ビ ス		X16-200357	3	Screw
十 字 皿 ビ ス		X18-170358	2	Screw
十 字 皿 ビ ス		X18-200557	3	Screw
緊 定 ワ ッ シ ャ ー		X32-401131	1	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401171	1	Retaining Washer
ワ ッ シ ャ ー		X32-502123	1	Washer
ワ ッ シ ャ ー		X32-505221	1	Washer
ラ ン プ	D	X61-7132	1	Lamp
平 ビ ス		X91-142525	2	Screw
平 ビ ス		X91-173556	1	Screw
平 ビ ス		X91-173584	1	Screw
平 ビ ス		X91-203021	1	Screw
平 ビ ス		X91-203539	1	Screw
平 ビ ス		X91-233436	3	Screw
平 ビ ス		X99-0047	1	Screw

Technical drawing of a mechanical part. The drawing shows a profile with a central circular feature and a smaller circular feature to its right. A dimension line labeled 'L' indicates the distance from the left edge to the center of the main circular feature. The dimensions are listed as follows:

- L: 5.8mm
- 6.0mm
- 6.2mm

13-9114




WINDING SHAFT & BODY

巻き上げ軸

本体

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
蝶 番 軸	D	13-4869	1	Shaft of Hinge
ロ - ラ -	D	13-4870	1	Roller
ス プ - ル フ ラ ン ジ	E	13-4912	1	Spool Flange
カ ラ -	E	13-4917	1	Collar
オ レ ン ジ マ - ーク	D	13-4920	1	Orange Mark
モ ル ト プ レ - ン	C	13-5432	1	Light Shield
巻 上 げ ス ト ッ パ -	E	13-9113	1	Winding Stopper
ラ チ ェ ッ ト 爪	E	13-9114(580) 13-9114(600) 13-9114(620)	1	Ratchet Claw
遮 光 皿	E	13-9115	1	Light Shield
カ ラ -	D	13-9116	1	Collar
ス プ ロ ケ ッ ト	D	13-9132	1	Sprocket
カ ム リ ン グ	D	13-9133-040	1	Cam Ring
ス プ ロ ケ ッ ト 軸	D	13-9134	1	Sprocket Shaft
シャ ッ タ - レ リ ー ズ 板	C	13-9135	1	Shutter Release Plate
遮 光 枠	E	13-9198	1	Light Shield
ビ	D	13-9213	3	Screw
ロ - ラ -	D	13-9214	1	Roller
ビ	D	13-9281-070	1	Pin
ビ	C	13-9367	1	Screw
モ ル ト プ レ - ン	C	13-9368	2	Light Shield
ス プ - ル	D	18-0217	1	Take Up Spool Unit
ス プ - ル フ リ ク シ ョ ン	E	18-0223	1	Spool Friction
巻 上 げ 軸	C	19-0535	1	Winding Shaft
巻 止 め 外 し	D	19-0542	1	Stopper Remove Lever
指 標 ホ ル ダ -	E	19-0548	1	Index Holder
フ ィ ル ム 送 り 指 標	C	19-0549	1	Film Feed Index
ス プ ロ ケ ッ ト カ バ -	D	19-0550	1	Sprocket Cover
中 ぶ た	D	19-0551	1	Inner Cover
本 体	E	19-0894	1	Body
巻 き 上 げ 上 板	E	19-0896	1	Winding Upper Plate
シャ ッ タ - ー チ ャ - ージ 指 標	D	19-1002	1	Shutter Charge Index
ビ	E	97-4288	1	Screw
コ イ ル ス プ リ ン グ	D	97-5607	1	Coil Spring
コ イ ル ス プ リ ン グ	D	97-5614-040	1	Coil Spring
ス プ リ ン グ	E	97-6363	2	Spring
ス プ リ ン グ	D	97-6650	1	Spring
ス プ リ ン グ	D	97-6651	1	Spring
ス プ リ ン グ	D	97-6662	1	Spring
フ ィ ル ム 送 り 指 標	E	97-9166	1	Film Feed Index
十 字 ナ ベ ビ ス		X16-170208	4	Screw
十 字 ナ ベ ビ ス		X16-170307	2	Screw
十 字 皿 ビ ス		X16-170857	1	Screw
十 字 ナ ベ ビ ス		X16-200357	3	Screw
十 字 皿 ビ ス		X18-170258	2	Screw
緊 定 ワ ッ シ ャ -		X32-401171	4	Retaining Washer
ワ ッ シ ャ -		X32-502133	1	Washer
ワ ッ シ ャ -		X32-505232	1	Washer
平 ビ ス		X91-142515	1	Screw
平 ビ ス		X91-203021	2	Screw
平 ビ ス		X91-233432	1	Screw
皿 ビ ス		X94-140106	2	Screw

EXPLODED VIEW
of
CANON CANONET G-III 17
CANON BLACK CANONET G-III 17

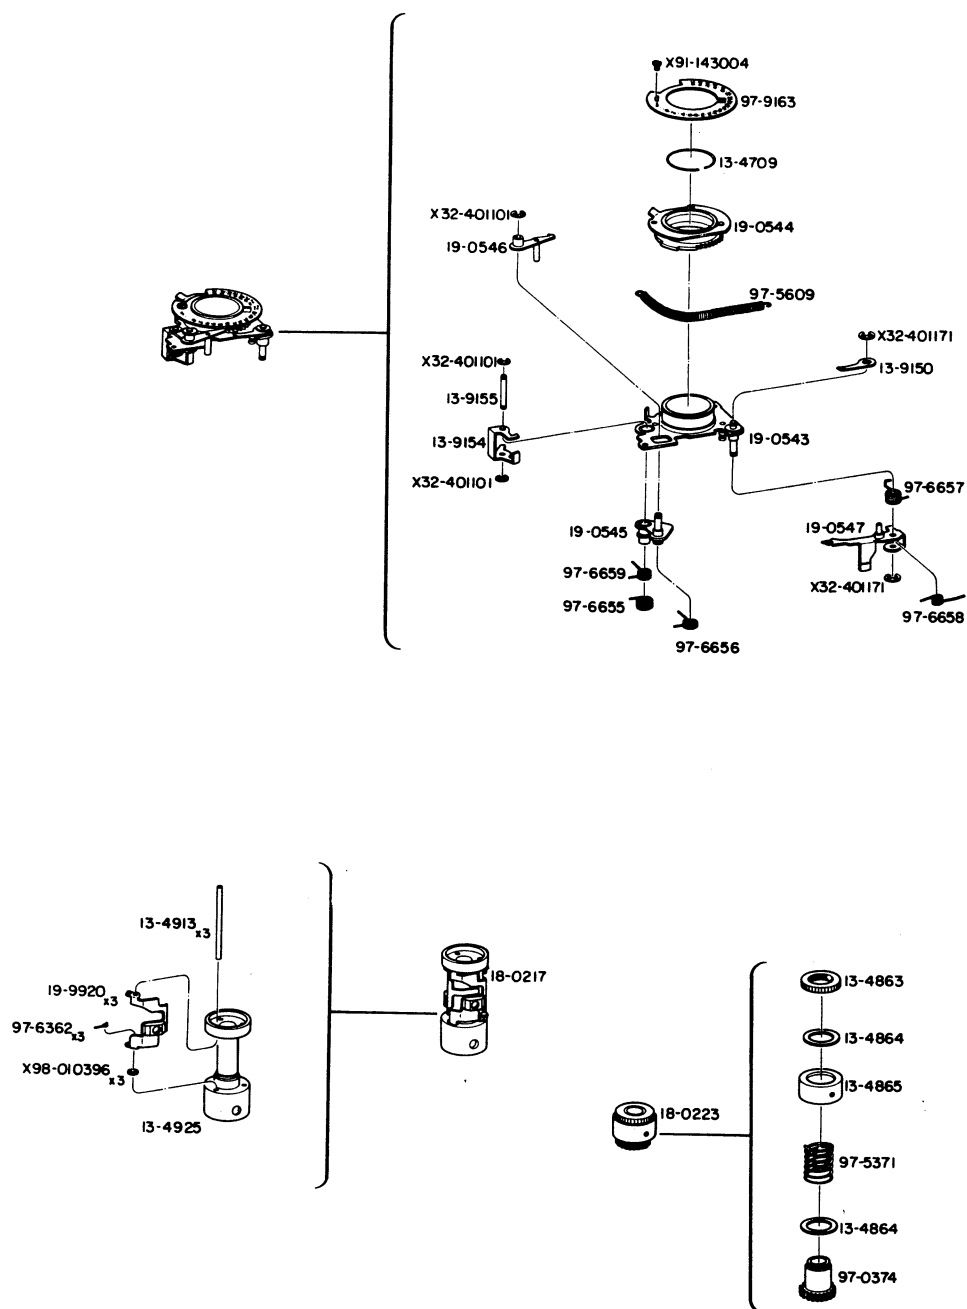

PARTS LIST

FILM COUNTER & TAKE UP SPOOL


フィルムカウンター 巻き取りスプール

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
リ テ イ ナ ー	E	13-4709	1	Retainer
ナ ッ ト	E	13-4863	1	Nut
フリクションワッシャー	E	13-4864	2	Fiber
スプリングカバー	E	13-4865	1	Spring Cover
水 か き 軸	E	13-4913	3	Shaft
ス プ ー ル	E	13-4925	1	Spool
ス ト ッ パ ー	D	13-9150	1	Stopper
空 送 り レ バ ー	D	13-9154	1	Film Feed Lever
空 送 り レ バ ー 軸	D	13-9155	1	Lever Shaft
ス プ ー ル ユ ニ ッ ト	D	18-0217	1	Take Up Spool Unit
スプールフリクション	E	18-0223	1	Spool Friction
カ ウ ン タ ー 地 板	E	19-0543	1	Film Counter Base
カ ウ ン タ ー ギ ャ ー	D	19-0544	1	Counter Gear
送 り 爪 地 板	E	19-0545	1	Feeding Claw Base
送 り 爪	D	19-0546	1	Feeding Claw
復 帰 レ バ ー	C	19-0547	1	Reset Lever
水 か き	E	19-9920	3	Friction Lever
ス プ ー ル ギ ャ ー	E	97-0374	1	Spool Gear
コイルスプリング	D	97-5371	1	Coil Spring
コイルスプリング	D	97-5609	1	Coil Spring
コイルスプリング	E	97-6362	3	Coil Spring
ス プ リ ン グ	D	97-6655	1	Spring
ス プ リ ン グ	D	97-6656	1	Spring
ス プ リ ン グ	D	97-6657	1	Spring
ス プ リ ン グ	D	97-6658	1	Spring
ス プ リ ン グ	D	97-6659	1	Spring
フィルムカウンター	D	97-9163	1	Film Counter
緊 定 ワ ッ シ ャ ー		X32-401101	3	Retaining Washer
緊 定 ワ ッ シ ャ ー		X32-401171	2	Retaining Washer
平 ビ ス		X91-143004	1	Screw
ワ ッ シ ャ ー		X98-010396	3	Washer

CANON CANONET G-III 17

CANON BLACK CANONET G-III 17

WIRING DIAGRAM

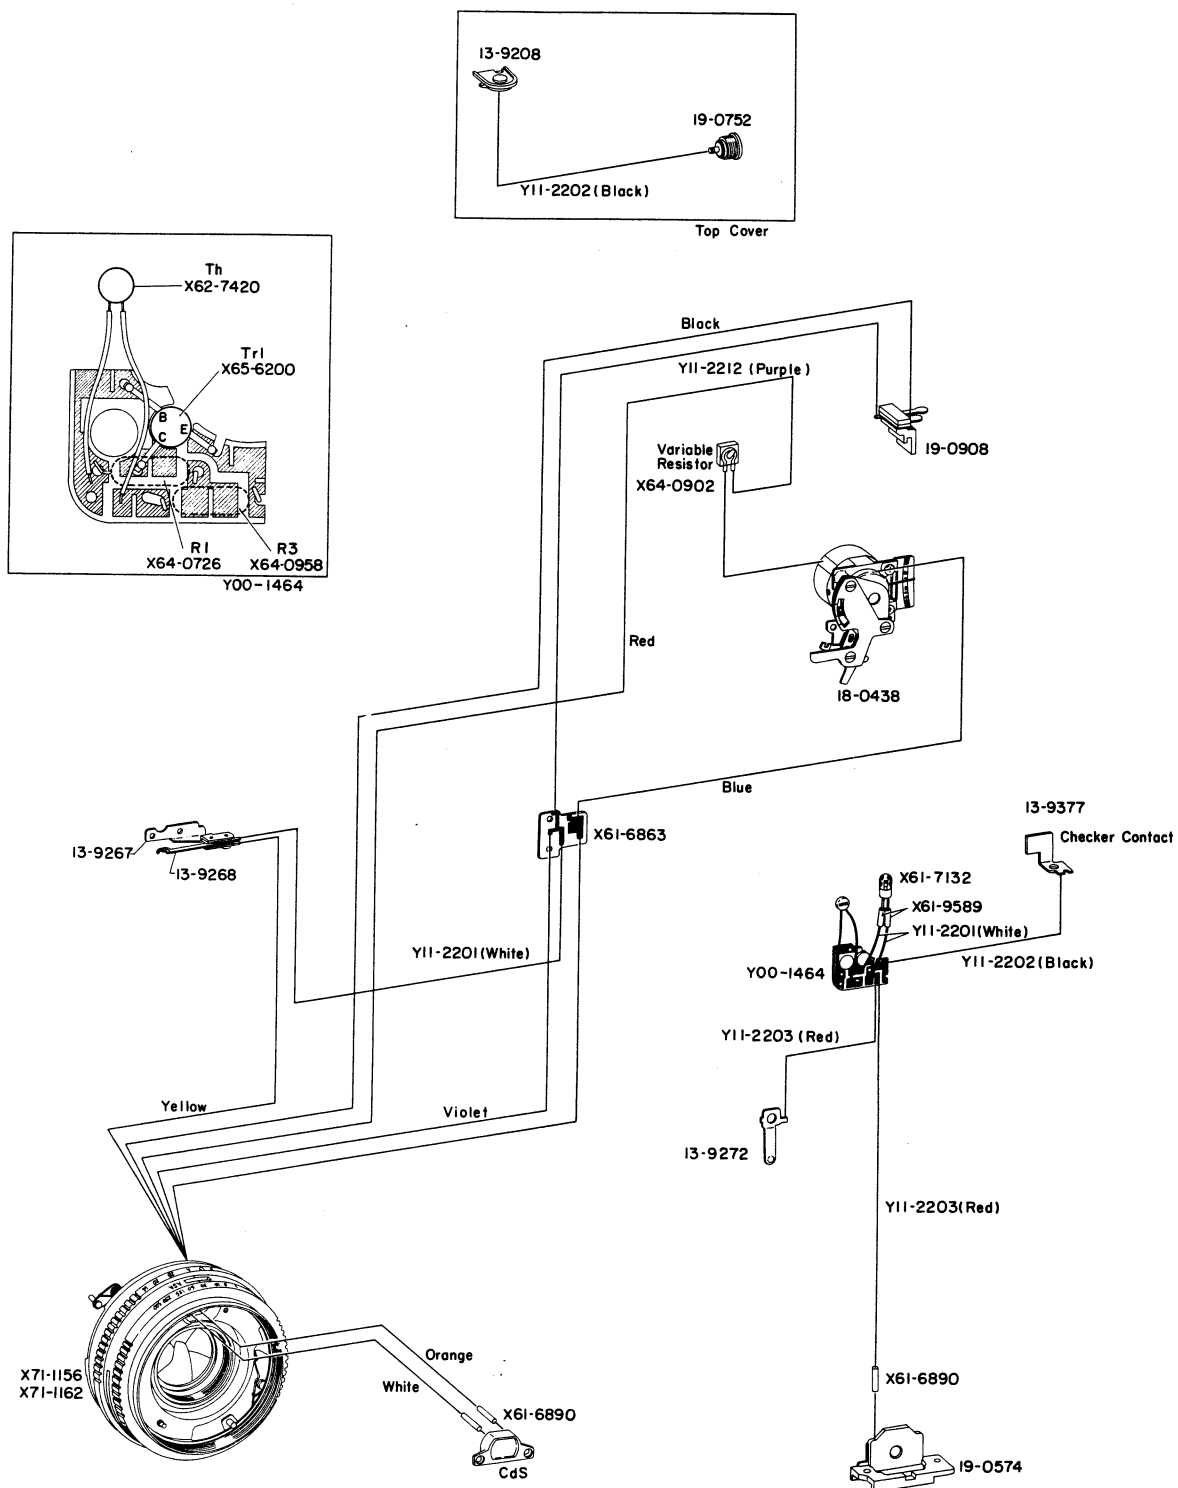

PARTS LIST


WIRING DIAGRAM

配線図

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION	REMARKS
チェッカープリント板	D	Y00-1464	1	Checker Circuit Board	
直結シンクローミナル	C	13-9208	1	Connect Flash Terminal	
接片	D	13-9267	1	Contact	
接片	D	13-9268	1	Contact	
接片	D	13-9272	1	Contact	
チェッカー接片	D	13-9377	1	Checker Contact	
メーターユニット	C	18-0438	1	Exposure Meter Unit	
水銀電池室	D	19-0574	1	Battery Box	
シンクローミナル	D	19-0752	1	Flash Terminal	
接片	D	19-0908	1	Contact	
プリント板	E	X61-6863	1	Print Circuit Plate	
ビニールチューブ	E	X61-6890	3	Vinyl Tube	
ランプ	D	X61-7132	1	Lamp	1.3V
ビニールチューブ	E	X6109589	2	Vinyl Tube	
サーミスタ	D	X62-7420	1	Thermistor	TD5-A127
半固定抵抗	D	X64-0902	1	Variable Resistor	15K Ω
抵抗	D	X64-2126	1	Resistor	82 Ω
抵抗	D	X64-2225	1	Resistor	100 Ω
抵抗	D	X64-2226	1	Resistor	270
トランジスタ	D	X65-6200	1	Transistor	2SC 182R
シャッター	C	X71-1156	1	Shutter	
シャッター	C	X71-1162	1	Shutter	
リード線 (白)		Y11-2201		Lead (White)	
リード線 (黒)		Y11-2202		Lead (Black)	
リード線 (赤)		Y11-2203		Lead (Red)	
リード線 (紫)		Y11-2212		Lead (Purple)	

SCHEMATIC DIAGRAM

結 線 図

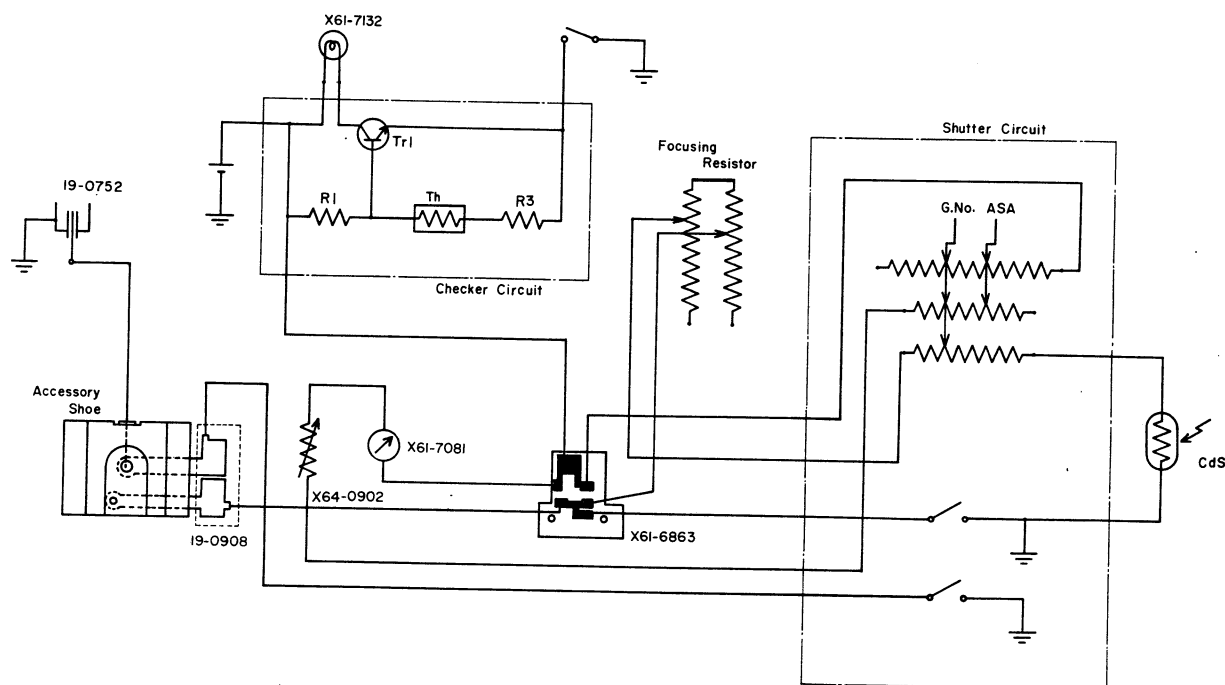

INDEX OF PARTS NUMBERS

PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE
Y00-1189	6	13-9150	9	13-9278	7	19-0533	6
Y00-1464	6, 10	13-9154	9	13-9279	1	19-0535	8
		13-9155	9	13-9280	1	19-0537	7
10-0242	6	13-9167	7	13-9281-070	8	19-0538-030	7
10-0243	6	13-9173	6	13-9382	6	19-0539-020	7
10-0244	6	13-9175	6	13-9284	6	19-0540	7
10-0245	6	13-9176	6	13-9287	1	19-0542	8
10-0246	6	13-9181	6	13-9289	1	19-0543	9
10-0247	6	13-9193	6	13-9290	7	19-0544	9
10-0248	1	13-9195	6	13-9293	2	19-0545	9
10-0249	1	13-9197	6	13-9294	3	19-0546	9
		13-9198	8	13-9298	2	19-0547	9
13-4100	6	13-9199	2	13-9299	2	19-0548	8
13-4248	1	13-9200	2	13-9313	3	19-0549	8
13-4531	1	13-9201	1	13-9314	3	19-0550	8
13-4542	1	13-9202	1	13-9315	3	19-0551	8
13-4612	1	13-9204	1	13-9316	6	19-0552	6
13-4615	1	13-9205	6	13-9318	7	19-0553	7
13-4709	9	13-9206	1	13-9319	2	19-0554	6
13-4863	9	13-9207	1	13-9323	6	19-0555	6
13-4864	9	13-9208	1, 10	13-9325	7	19-0556	1
13-4865	9	13-9211	6	13-9329	1	19-0557	6
13-4869	8	13-9213	8	13-9347	1	19-0558	6
13-4870	8	13-9214	8	13-9350	1	19-0559	6
13-4876	6	13-9215	6	13-9353	3	19-0560	6
13-4912	8	13-9216	6	13-9354	6	19-0562	3
13-4913	9	13-9218	3	13-9361	7	19-0563	3
13-4917	8	13-9220	3	13-9362	7	19-0564	3
13-4920	8	13-9221	3	13-9365	1	19-0565	3
13-4923	7	13-9222	2	13-9367	8	19-0566	3
13-4925	9	13-9224	3	13-9368	8	19-0567	3
13-5368	1	13-9225	3	13-9369	6	19-0572	2
13-5432	8	13-9228	1	13-9372	1	19-0574	7, 10
13-9103	1	13-9233	2	13-9373	1	19-0579-020	1
13-9105-020	1	13-9236	3	13-9374	1	19-0580	2
13-9106-050	1	13-9239	3	13-9375	1	19-0752	1, 10
13-9113	8	13-9242	2	13-9376	1	19-0892	6
13-9114	8	13-9259	2	13-9377	7, 10	19-0893	1
13-9115	8	13-9264	2	13-9378	7	19-0894	8
13-9116	8	13-9265	3	13-9379	1	19-0896	8
13-9118-030	7	13-9266	3	13-9383	1	19-0908	2, 10
13-9120	7	13-9267	3, 10			19-0920	1
13-9128	7	13-9268	3, 10	18-0217	8, 9	19-0923	1
13-9129-050	7	13-9269	3	18-0223	8, 9	19-0924	1
13-9130	7	13-9270	3	18-0438	2, 10	19-1002	8
13-9131	7	13-9271	7	18-0439	3	19-9620	1
13-9132	8	13-9272	7, 10	18-0445	2	19-9920	9
13-9133-040	8	13-9273	7	18-0446-010	2		
13-9134	8	13-9276	1			27-0181	3
13-9135	8	13-9277	7	19-0532	6	27-0202	3

PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE	PARTS NO.	PAGE
27-8639	2	X14-140258	6	X65-6200	10	Y13-5242	5
27-8643-010	2					Y13-5243	5
		X16-140157	1	X71-1156	2, 10	Y13-5244	5
97-0374	9	X16-170208	7, 8	X71-1162	2, 10	Y13-5245	5
97-0625	7	X16-170257	3			Y13-5246	5
97-0626	7	X16-170307	2, 8	X91-142515	8	Y13-5247	5
97-0628	7	X16-170857	1, 6	X91-142525	7	Y13-5248	5
97-4288	8	X16-200308	6	X91-143004	9	Y13-5249	5
97-5371	9	X16-200357	7, 8	X91-143512	1	Y13-5250	5
97-5607	8	X16-200458	1, 6	X91-143556	2, 3	Y13-5251	5
97-5608	6			X91-171427	3	Y13-5252	5
97-5609	9	X18-140208	2	X91-173425	3	Y13-5253	5
97-5610	2	X18-170207	2	X91-173537	1	Y13-5254	5
97-5611	3	X18-170258	1, 2, 6, 8	X91-173542	3	Y13-5255	5
97-5612	2	X18-170306	1	X91-173556	7	Y13-5256	4
97-5613	7	X18-170307	3	X91-173584	7	Y13-5257	5
97-5614-040	8	X18-170358	7	X91-203021	7, 8	Y13-5258	5
97-6093	7	X18-200358	1	X91-203432	8	Y13-5259	5
97-6362	9	X18-200557	7	X91-203539	7	Y13-5260	5
97-6363	8			X91-233436	7	Y13-5261	5
97-6650	8					Y13-5262	5
97-6651	8	X19-170306	1	X94-140106	8	Y13-5263	5
97-6652	7					Y13-5264	5
97-6653	7	X32-401101	9	X98-010396	9	Y13-5265	5
97-6654	7	X32-401131	7	X98-010407	3	Y13-5266	5
97-6655	9	X32-401171	3, 6, 7, 8, 9	X98-100386	1	Y13-5267	5
97-6656	9	X32-401242	1			Y13-5268	5
97-6657	9	X32-502123	7	X99-0047	7	Y13-5269	5
97-6658	9	X32-502133	8	X99-0048	1	Y13-5270	5
97-6659	9	X32-502312	3	X99-0049	1	Y13-5271	5
97-6660	6	X32-502624	6			Y13-5272	5
97-6661	6	X32-505221	7	Y11-2201	10	Y13-5273	5
97-6662	8	X32-505232	8	Y11-2202	10	Y13-5274	5
97-6664	3			Y11-2203	10	Y13-5275	5
97-6665	3	X34-100571	6	Y11-2212	10	Y13-5276	4
97-6680-040	7					Y13-5277	4
97-7600	1	X61-6863	3, 10	Y13-5228	5	Y13-5278	4
97-7602	1	X61-6864	3	Y13-5229	5	Y13-5279	4
97-7603	6	X61-6890	2, 10	Y13-5230	5	Y13-5280	4
97-9163	9	X61-7132	7, 10	Y13-5231	5	Y13-5281	4, 5
97-9166	8	X61-8018	3	Y13-5232	5	Y13-5282	4
97-9562	1	X61-9589	10	Y13-5233	5	Y13-5283	4
				Y13-5234	5	Y13-5284	4
X10-170207	3	X62-7420	10	Y13-5235	5	Y13-5285	4
				Y13-5236	4	Y13-5286	4
X11-140158	6	X64-0902	10	Y13-5237	5	Y13-5287	4
X11-140188	6	X64-2126	10	Y13-5238	4	Y13-5288	4
X11-140207	3	X64-2225	10	Y13-5239	4	Y13-5289	4
X11-140208	6			Y13-5240	5	Y13-5290	4
				Y13-5241	5	Y13-5291	4

PARTS NO. PAGE PARTS NO. PAGE PARTS NO. PAGE PARTS NO. PAGE

Y13-5292	4
Y13-5293	4
Y13-5294	4
Y13-5295	4
Y13-5296	4
Y13-5297	4
Y13-5298	5
Y13-5299	5
Y13-5300	5
Y13-5301	5
Y13-5302	5
Y13-5303	5
Y13-5304	4
Y13-5305	4
Y13-5306	4
Y13-5307	5
Y13-5308	4
Y13-5309	4
Y13-5310	5
Y13-5311	4
Y13-5312	4
Y13-5313	4
Y13-5314	5
Y13-5315	4
Y13-5316	4
Y13-5319	4
Y13-5320	4
Y13-5321	4
Y13-5322	4
Y13-5323	4
Y13-5324	4

CANON SERVICE TOOLS LIST

CANON CANONET GHII 17
(REF. NO. 1-30807)

CANON BLACK CANONET GHII 17
(REF. NO. 1-30808)



CANON CANONET GHII 19
(REF. NO. 1-30817)

TESTING EQUIPMENT

Use	Name of Testing Equipment
Focus	1. 200mm T-type Collimator
	2. Mirror for 35mm
Field of View	1. Universal Parallax Collimator-1
Exposure Meter	1. E. E Camera Tester
	2. Inspection Device for Canon Meter-1
	3. Standard Checker-2 (CdS)
	4. Ohm Meter

SPECIAL SCREWDRIVERS



T06A-13-4611-1T



Tightening
Winding Lever
(Common to New
Canonet QL)


SPECIAL SCREWDRIVERS

T0630-13-9246-1T




Tightening Front
Lens Unit
(Common to New
Canonet QL)

T0630-13-9245-2S

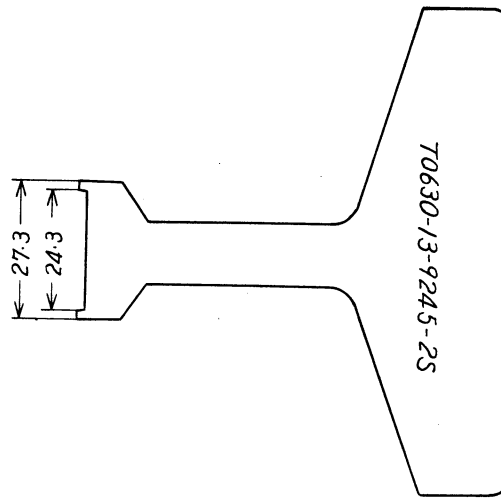


Tightening Rear
Lens Unit
(Common to New
Canonet QL)

T0630-19-9278-1S



Tightening
Synchro Terminal
(Common to New
Canonet QL)


T0630-27-8639-1T

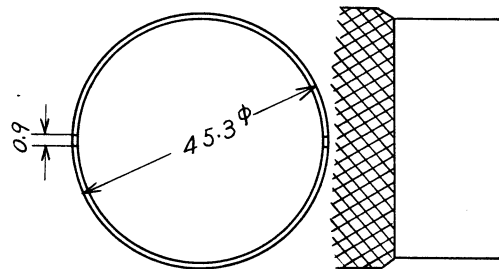

Tightening Name
Ring of the Lens
(Common to New
Canonet QL)

SPECIAL SCREWDRIVERS

T0630-27-8643-2S

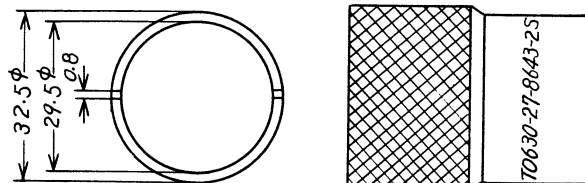


Tightening Shutter
Unit
(Common to New
Canonet QL)

CANON REPAIR MANUAL

CANON CANONET G-III 19
(REF. NO. 1-30817)

CANON INC. JAPAN

EXPLODED VIEW
of
CANON CANONET G-III 19

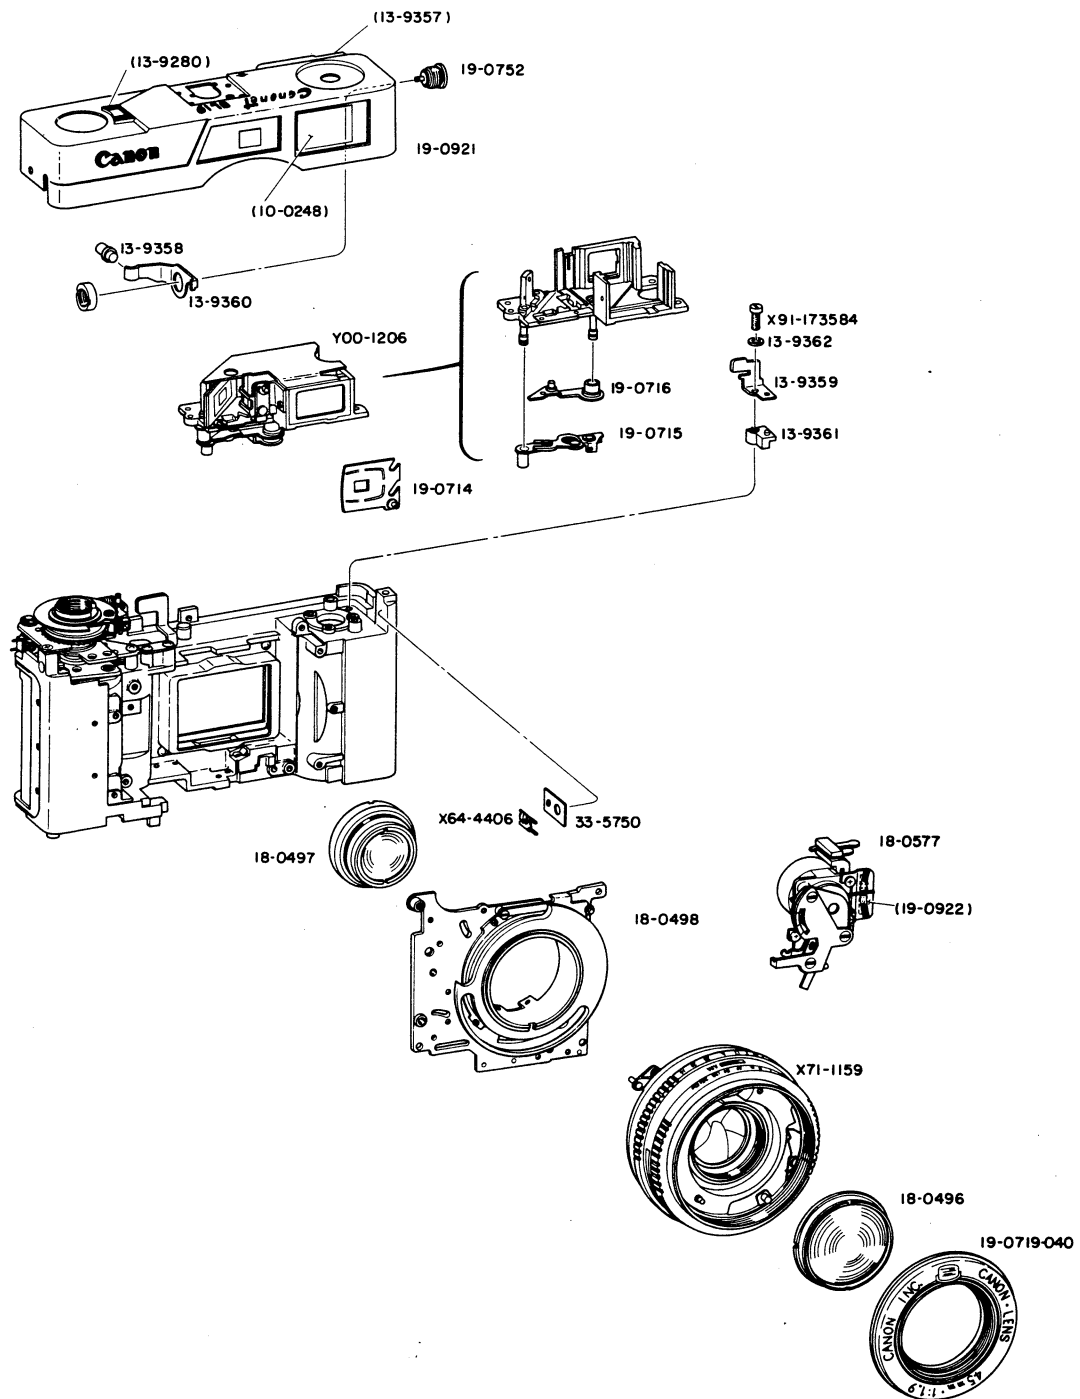


Canon Canonet G-III 19 is absolutely the product in mechanism as Canon Canonet G-III 17 is, we therefore picked up only parts which are used in the Canon Canonet G-III 19 for this repair manual.

The rest of the parts as Canon Canonet G-III 19, in case if necessary, refer to the repair manual.

PARTS LIST

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
ファインダーユニット	D	Y00-1206	1	View Finder Unit
前 面 ガ ラ ス	B	10-0248	1	Front Glass
カ ウ ン タ ー 窓	C	13-9280	1	Counter Window
接 眼 レ ン ズ 枠	C	13-9357	1	Eyepiece Lens Frame
チ ェ ッ カ ー 釦	C	13-9358	1	Checker Button
接 片	C	13-9359	1	Contact
接 片	C	13-9360	1	Contact
接 片 台	D	13-9361	1	Contact Base
絶 縁 ワ ッ シ ャ ー	D	13-9362	1	Washer
前 玉 ユ ニ ッ ト	C	18-0496	1	Front Lens Unit
後 玉 ユ ニ ッ ト	C	18-0497	1	Rear Lens Unit
前 板 ユ ニ ッ ト	D	18-0498	1	Front Panel Unit
メ ー タ ー ユ ニ ッ ト	C	18-0577	1	Exposure Meter Unit
ファインダーマスク	C	19-0714	1	Finder Mask
連 動 レ バ ー	E	19-0715	1	Connecting Lever
連 動 レ バ ー	E	19-0716	1	Connecting Lever
ネ ー ム 環	C	19-0719-040	1	Name Ring
上 部 カ バ ー	C	19-0921	1	Top Cover
絞 り 目 盛 板	D	19-0922	1	Aperture Scale Plate
抵 抗 取 り 付 け 板	D	33-5750	1	Resistor Support
半 固 定 抵 抗	D	X64-4406	1	Variable Resistor
シ ャ ッ タ ー	C	X71-1159	1	Shutter

WIRING DIAGRAM

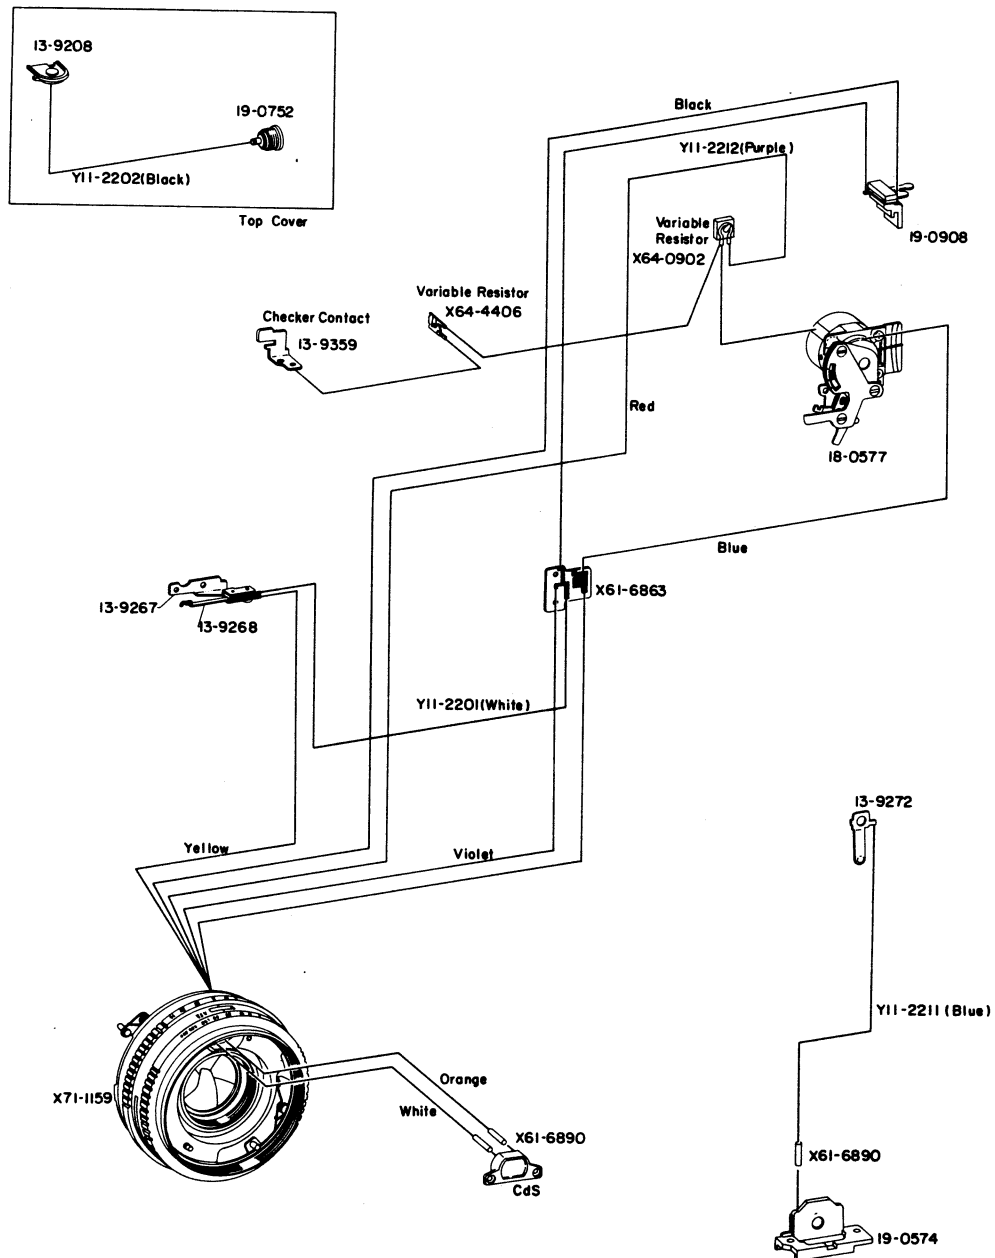

PARTS LIST

WIRING DIAGRAM

結 線 図

部 品 名 称	CLASS	PARTS NO.	QTY.	DESCRIPTION
直結シンクロターミナル	C	13-9208	1	Connect Flash Terminal
接 片	D	13-9267	1	Contact
接 片	D	13-9268	1	Contact
接 片	D	13-9272	1	Contact
接 片	C	13-9359	1	Contact
メーターユニット	C	18-0577	1	Exposure Meter Unit
水銀電池室	D	19-0574	1	Battery Box
シンクロターミナル	D	19-0752	1	Flash Terminal
接 片	D	19-0908	1	Contact
プリント板	E	X61-6863	1	Print Circuit Plate
ビニールチューブ	E	X61-6890	3	Vinyl Tube
半固定抵抗	D	X64-0902	1	Variable Resistor (15K)
半固定抵抗	D	X64-4406	1	Variable Resistor (22K)
リード線 (白)		Y11-2201		Lead (White)
リード線 (黒)		Y11-2202		Lead (Black)
リード線 (青)		Y11-2211		Lead (Blue)
リード線 (紫)		Y11-2212		Lead (Purple)

SCHEMATIC DIAGRAM

配 線 図

